


- Full HD 1080p over coaxial cable, BNC connect on
- Ant -dust coated polycarbonate cover
- Aluminum Die-Cast ng body
- True WDR, True Day and Night
- Panasonic 2.2 Megapixel CMOS Sensor
- 3.0 Megapixel Fixed 3.7mm HD Lens
- 1920x1080p/30fps, HD-SDI(BNC) and 700TVL Analog (BNC)
- 0.5Lux (Color), 0.1Lux (B/W), 0.02Lux (Sens-up 30X)
- 24 IR LEDs, AGC, ATW, DNR (2D + 3D), Day & Night

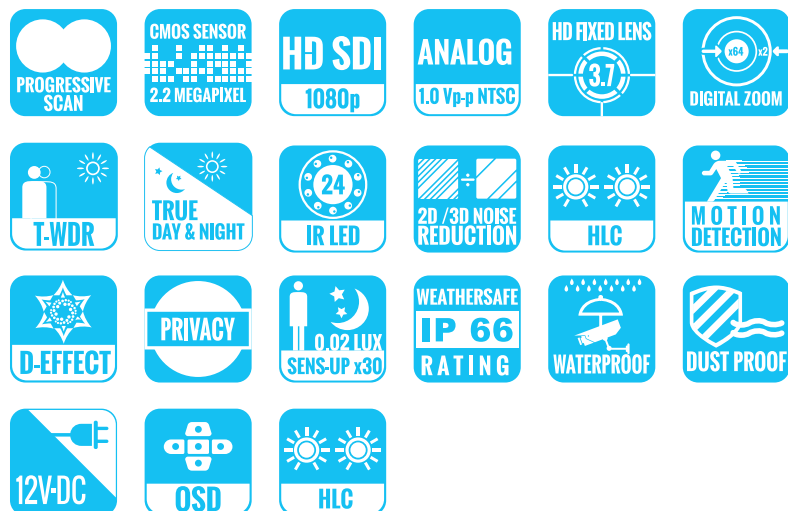

1.0 Vp-p (75Ω, Composite) NTSC

Adjustable 1 ~ 15

On (x2 ~ x64) / Off


On (X2 ~ X30) / Off



- SET : Used to access the menu and confirm selection
- UP: Used to move the cursor up
- DOWN : Used to move the cursor down
- LEFT : Used to move the cursor left and change the value
- RIGHT : Used to move the cursor right and change the value

- Address: 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714) 996-1177, Fax : (714) 996-1138
- Sales: sales@viewzusa.com
- Specification subject to change without notice.

1. Attach the camera base on the installation surface with the supplied screws.
2. Adjust the camera angle using the wrench included.
3. Put the hood over the camera body.
4. Connect the camera output to the DVR or to the monitor.
5. Connect the power source.

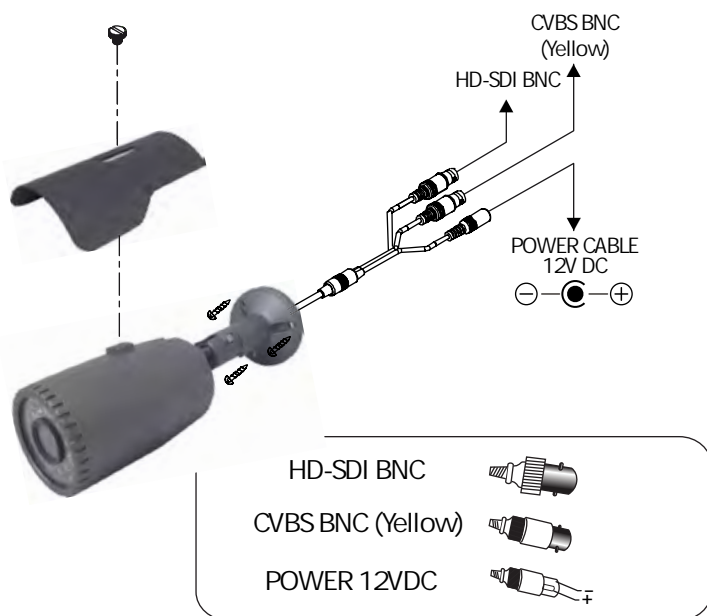

Do not use the camera if fumes, smoke or a strange odor is emitted from the unit, or if it seems to not function correctly. Disconnect the power source immediately and consult your supplier.



Always follow the instructions in the installation guide when applying power. Fire and equipment damage can occur if power is applied incorrectly. For the correct power supply, refer to the specification sheet.



Do not install or operate in small, unventilated areas. Heat build up can significantly reduce the performance and operating life of the product and may cause a fire.



To prevent damage, do not drop the camera or subject it to strong shock or vibration.





If installed close to a TV, radio transmitter, magnet, electric motor transformer or audio speakers the magnetic field generated may interfere with or distort the image.



Whether or not the camera is used outdoors, never point it toward the sun. Use caution when operating the camera in the vicinity of spot lights or other bright lights and light reflecting objects.



Do not use the camera in extreme environments where high temperatures or high humidity exists. Use the camera under conditions where temperatures are between 14°F ~ 122°F (-10°C ~ 50°C), and humidity is below 90%.

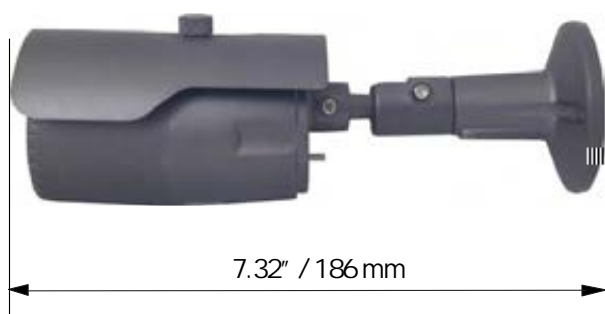

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference.
- This device must accept any interference received, including interference that may cause undesired operation.

- Address: 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone: (714) 996-1177, Fax: (714) 996-1138
- Sales: sales@viewzusa.com
- Specification subject to change without notice.