



REV.	REMARK	DATE	SIGN.
1			

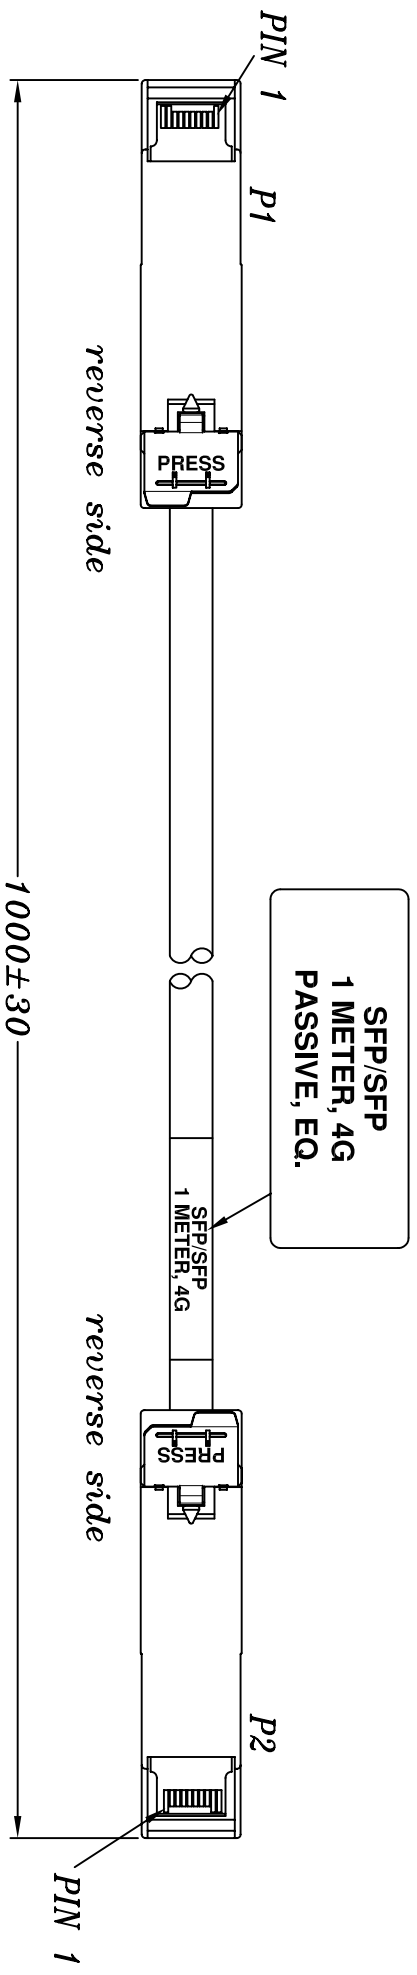

LABELLING ON BAG:

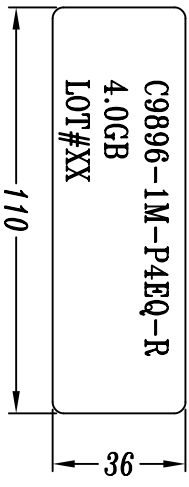

MATERIAL (ROHS COMPLIANT) -

1. CABLE: DIFFERENTIAL IMPEDANCE: 100±5 OHMS @TDR
2. HOOD: ZINC DIE CASTING, NICKEL PLATING.
3. LATCH: POLYCARBONATE RESIN UL94V, COLOR IN BLACK.
4. P.C.B.: 4 LAYERS, FR4, 30U" GOLD ON GOLDEN FINGERS, COLOR: RED.
5. SERIAL ID IC: MICROCHIP 24LC01B OR EQUIVALENT."THE MATE COMPANY"
6. OFFSET TYPE (BELLY TO BELLY)
7. PASSIVE TYPE WITH EQ.
8. FOR 4.25GHZ USE.

WIRING CHART

P1 END	SIGNAL	P1 PAD	P2 END	SIGNAL
P1 PAD	RX-	19	TX-	TX-
12	RX-	19	TX-	TX-
13	RX+	18	TX+	TX+
GROUND		GROUND		
18	TX+	13	RX+	RX+
19	TX-	12	RX-	RX-
GROUND		GROUND		

DataStorageCables.com

DESC.	SFP/SFP CABLE 4.25GBPS ROHS	APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	1 = 1	UNIT	mm
P/N	C9896-1M-P4Eq CUSTOMER P/N			Ku.		DATE	03/17/06	DWG NO.	DWG\RC\1753