




Motion detector




Häfele Connect Mesh motion detector - direct powered

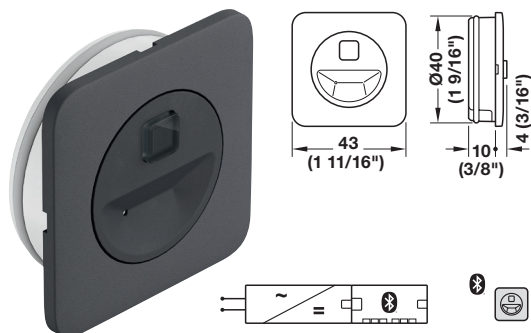

Surface mount housing

Detection Range

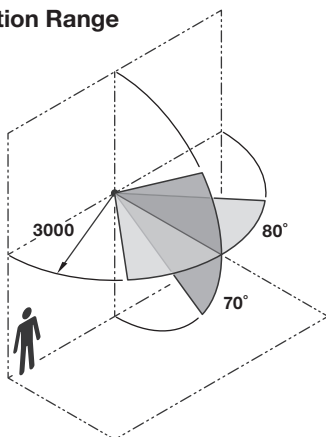

Use Connect Mesh App to customize:

- > Run-time
- > Brightness threshold
- > Soft-off settings

- > Area of application: For controlling components of a Häfele Connect Mesh network
- > Version: Direct powered
- > Configuration: Use the Häfele Connect Mesh app to pair the switch to a group of lights and to customize settings for run time, brightness threshold and soft-off settings
- > Function: The modular lead cables are for power supply only. The switching signal is transmitted via Bluetooth®
- > Sensor range: 3 m (approximately 10 ft.)
- > Sensor angle: 80 degrees horizontal; 70 degrees vertical
- > Power consumption: 2 W
- > Mounting: Recess in drilled hole or surface mount with supplied switch housing
- > Drill hole Ø: 40 mm (1 5/8")
- > Material: Plastic
- > Color: Black
- > Dimensions: Switch (L x W): 43 x 43 mm (1 11/16" x 1 11/16")
Housing (L x W x H): 47 x 47 x 15 mm (1 7/8" x 1 7/8" x 9/16")
- > Supplied with: 1 motion detector switch
1 surface mount housing
1 12 V or 24 V modular lead cable (833.95.788 or 833.95.791)

Voltage	Item No.
5 12 V	850.00.954
5 24 V	850.00.955



Motion detector can only control lights that are connected to a Häfele Connect Mesh network. Please order Häfele Connect Mesh distributor separately.

