



Distributor and remote control sets

4-Port Series - multi-white

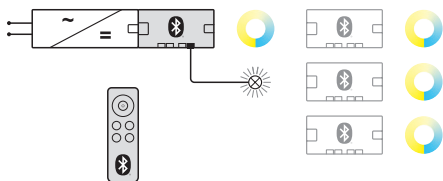

4-port Connect Mesh distributor and remote control - 3-wire multi-white

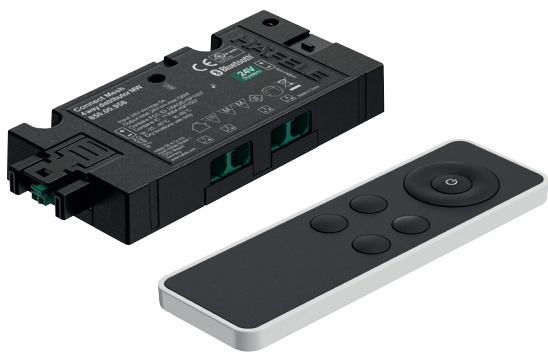

4-port Connect Mesh Multi-white Distributor
(Up to 3 additional distributors can be added to the network)

1-Channel Functionality

- By default, the remote controls all the lights together.
- When you select one of the four channels on the remote, the remote will only control the lights connected to the mesh box that was assigned to that channel during the provisioning process.



To order additional distributors without the remote control, see page 142.



- > Distributor and remote are “pre-paired”; no app required
- > 3-wire Multi-white ports; no adapters needed
- > Ideal for smaller installations with up to 4 distributors and 1 remote control

- > Area of application: For switching on/off, dimming (0-100%), and color temperature change for multi-white lights
- > Version: 4-port series; for 3-wire multi-white LED lights
- > Number of connections: 1 x input port with box to box plug
1 x output port with box to box socket
4 x output ports with Loox5 3-pin sockets for 3-wire multi-white lights
- > Max. number of distributors per network: 4
- > Max distance between devices: 10 m (32.8 ft.)
- > Material/Color: Plastic, black
- > L x W x H: Distributor: 105 x 50 x 16 mm (4 1/8" x 2" x 5/8")
Remote control: 125 x 40 x 12 mm (4 15/16" x 1 5/8" x 15/32")
- > Supplied with: 1 4-port connect mesh multi-white distributor
1 Remote control with CR2032 battery included

Voltage	Memory function after power loss	Wattage capacity W	Item No.
5 12V	100%; Color temp. 3850K*	36	850.00.983
5 24V	Remembers last state	72	850.00.984

*Memory function for 12 V distributors with production date of 03/2022 or later will be “Remembers last state”.



Note

For full Connect Mesh functionality with switching function and app control, please use the Häfele Connect Mesh 6-way distributor.
Distance information within the network applies to a clear line of sight. Obstacles and sources of electromagnetic interference can reduce the range. Adding another 4-port distributor can be used as a signal booster to compensate for the loss of range. Maximum cable length from the power supply to the distributor is 2 m (6.5 ft.)

Ordering Information

Connect Mesh 4-port series multi-white networks are expandable to up to 4 distributors. Please order additional distributors and power supplies separately. Note nominal voltage!