

163

To,

The ag Engineer

Karachi Municipality

Sir,

I beg to report
that the drainage
connection of the house
on plot No 117. C.B.
Kutchiwara lane
No. 1 has been inspected
by you with the ag
Chief Engineer.

Respect your
order on the matter.

Yours sincerely

Nathaniel

To ag Engineer 11/8/19

In far as up & is concerned
he thinks the arrangement
of the drains an exceptional
one, in meeting demand
under the rules; and the
arrangement made appears
to be sound. As there
is only water passing
through the pipe exposed
in the godown, there would
be very little harm done
by letting it stand.

11/8

Nathaniel

file

1.

Mr. Vawar. file this
1/10/1918

21
11/10

Sir

With reference to the report that I have gone through the whole of the correspondence I do not know that it has ever been submitted to the Managing Committee in connection with drainage work. It only seems that papers were sent to me for revoking the license of the plumber who was fined ~~Rs~~ 5/- by the Chief Officer & Chief Engineer.

The owner has now requested for submitting these papers to me for their inspection. Request order.

Yours obediently

24/7. Anandam

RS

Through

The Land Surveyor

Submitted for order.

Nathan

25 19.

82 I as Chief Eng. for favour of order of the M.C. being obtained the work being carried out, as this appears necessary

Nathan 26

82 Can as Chief Engineer meet M/s on the site on Monday. Nathan 1/8/19

Ag. Engineer
Sent up a report
Giving full particulars
Yes. tomorrow morning 6.15 V. 30/7/19
V. 5/8/19



3-2

2

URGENT

Sir

I beg to request the
 time for inspection the
 design connection of
 plate no 117. of master
 plate. he given to the
 of Engineer as City
 you was in office.

Respect your order.

Yours obedt
 Nathil
 6/13

To, the Chief Engineer.
 H. M.

Nathil

22/11

22/11

4-1 2199

mp/14

No: W/ 2056 of 1919,

Superintendent of Machinery's Office,
Karachi 8th July 1919.

M E M 0/-

Land Surveyor

With reference to the Engineer's No. E3345 dated 2nd July 1919, the Superintendent of Machinery has the honour to state that the correspondence re: drainage work on plot No. 117, C-6, Market quarter was forwarded to the Head Office for issuing final notice.

M. I. M. E.
Superintendent of Machinery,
Karachi Municipality.

D. P. N.



4-2

2812

2/1/19

2/1/19

Mr. Vaswani, attach 7.7

& keep

Shkhar

12/7/19

Returned with 7.7

Full 7.7 the papers Head. Clerk
may be requested.

W. L.

Enclined forward

Nathaniel

14
7/19

AL

10/19

Head Clerk please
attach & return

18
7

Ship

Full 7.7 is hereunder

attached:

7.7 is hereunder

18/7/19

James

8/19

submitted to the
ag Engineer for 7.7
disposed - Nathaniel

18
7

This has already been
before the Committee
please attach resolution

22
7

Mr. Vaswani



Heritage

KMR.CDD.MaQ.1917-1919.01

5

No. E. 3345 of 1919. Form No. 19 (200-26-1-18.)

MUNICIPAL ENGINEER'S OFFICE,

Karachi, 2nd July 1919
4

2nd Reminder:-

MEMORANDUM.

URGENT

This office Nos L.S 2672 & 2982 dated
31 May & 13 June 19. requesting
early return of Correspondence re:
drainage work on plot No. 117 of
Market Quater

Requests the
favour of an
early ^{Courplaise} reply to
this Office re-
ference noted
in the margin.

A. M. INST. C. E.,

A.M. INST. C. E.,

Engineer,

Karachi Municipality.

4/7/19.

To

The Superintendent of Machinery



6
No. E. 2982 of 1919. Form No. 19 (200-26-1-18.)

MUNICIPAL ENGINEER'S OFFICE,

Karachi, 13th June 1919
19

MEMORANDUM.

This Office No. L.S 2672 dated 31st May
2 June.
requesting early return of Correspondence
re drainage work on plot No 117C6
market Quater.

Requests the
favour of an
early ~~reply~~ ^{Compliance} to
this Office re-
ference noted
in the margin.

Mell

M. INST. M.E.,

ag. Engineer,

Karachi Municipality.

19/6/19
MC

To

The Superintendent of Machinery.



GULAMHUSEIN ALIBHOY KARIMJI.

Hon Secretary "FAIZ-E-ALVI"

Karachi City, 8th June 1919.

The Chief Officer,


Karachi Municipality,

Karachi.

Dear Sir.

In reply to your no:G6191 of 4th/7th Inst., received today re: drainage pipes on plot no:117 c6 Market Quarter I refer you to my last letter dated 12th May on the subject in which I have requested the Chief Officer & the Chief Engineer to place the matter before the Managing Committee.

Yours faithfully.




Hon. Secretary,

Faiz-E-Alvi.

5347

11/6/19

Landsurveyor
attach 7/6
1916


urgent

Hearby

attach 7/6

a.6.19

11/6/19



7-2

Mr. Brown. please advise
the report
on 10/16

It is herewith attached.
A further expedite to S. M.
for returning It is also
sent herewith for disposal

13/11/1917

2002
11/11/17



FRESH

FINAL NOTICE.

In continuation of Notice No. W743 dated 1/2nd May 1919

Mr. Ghulam Hussain Allibhoy Secretary Faiz-E-Alvi is hereby given

final notice that if the drainage work of his house on plotNo. 117, C-6, Market Quarter, is not ~~repaired and renewed~~ carried out within three days from the date hereof, the same will be done by the Municipality at his risk and cost. if he obstructs the Municipal men in the execution of their duty he is to be prosecuted.For his information an approximate estimate of the cost is given below and if the work is performed by the Municipality this amount together with all other expenses incurred in connection therewith will be recovered from his as the law directs.

Approximate Estimate.

36' C.I. Pipe for under ground drainage	Rs 140-0-0
30' C.I. Pipe 4" for W.W. pipe	60-0-0
2 manholes including C.I. covers	60-0-0
1 T.C.I. 4"	10-0-0
2 Bends 4"	6-0-0
400 Cubic ft. masonry work @ Rs40 per 100 cubic feet	160-0-0
Labour charges	40-0-0
Total Rs	476-0-0
Contingencies charges at 10%	47-6-0
Supervision charges at 5%	23-12-0
Grand total Rs	547-4-0

[Signature]
 M. INST. C. E.,
 Chief Officer and Chief Engineer,
 Karachi Municipality.

No. G. 6191 of 1919.

MUNICIPAL OFFICE,

Karachi, 4th June 1919.

No. G. 6192 of 191

MUNICIPAL OFFICE,

Karachi, 4th June 1919.

Copy forwarded to the Engineer. If this notice is not complied with the required work is to be done by the Municipality without further delay and all expenses recovered from the owner.

[Signature]
 M. INST. C. E.,
 Chief Officer and Chief Engineer,
 Karachi Municipality.



FINAL NOTICE.

In continuation of Notice No. LWS.602

dated 4th February 1919

Mr. Ghulam Hussain Allibhoy Son: Secretary Faiz-E-Alvi is hereby given

final notice that if the drainage work of his house on plot No. 117, C-6, Market Quarter, is not repaired and renewed within three days from the date hereof, the same will be done by the Municipality at his risk and cost.

For his information an approximate estimate of the cost is given below and if the work is performed by the Municipality this amount together with all other expenses incurred in connection therewith will be recovered from his as the law directs.

Approximate Estimate.

36' C.I. pipe for under ground drainage	Rs 140-0-0
30' C.I. pipe 4" for W.W. pipe	" 60-0-0
2 manholes including C.I. covers	" 60-0-0
1 T.C.I. 4"	" 10-0-0
2 Bends 4"	" 6-0-0
400 Cubic ft. masonry work @ Rs40 per 100 cubic feet	" 160-0-0
Labour charges	" 40-0-0
Total Rs	476-0-0
Contingencies charges at 10 %	47-8-0
Supervision charges at 5 %	23-12-0
Grand Total Rs	547-4-0

(Sd.) M. INST. C. E.,
Chief Officer and Chief Engineer,
Karachi Municipality.

MUNICIPAL OFFICE,

Karachi, 1st May 1919.

No. G. 4747 of 1919.

MUNICIPAL OFFICE,

Karachi, 1st May 1919.

Copy forwarded to the Engineer. If this notice is not complied with the required work is to be done by the Municipality without further delay and all expenses recovered from the owner.

M. INST. C. E.

Chief Officer and Chief Engineer,
Karachi Municipality.

Handwritten notes:
Forwarded to the Engineer after expiry of time specified.
Sd. C. E. to Kar.

No 1704 2 1919.
29.5.1919.

Sir,

Mr. Ypsafali & Shulam
Hersin do not allow the
work to be done by the phule.

Yours obediently
J. K.

28⁵ in. Kauraldin
19 Drunje mairty

Forwarded to the
Chief Engineer for
information & from
29 of June 1919
H. Chaudhury

Forwarded to the ag. C.O.
for necessary action.

~~under Section 159~~
~~of the Act.~~



31/5/19

Exemption is hereby
accorded to proceed
under Sec. 156 of the Act.

Section 159 relates to power
of entry

2/6

6/11/19
2/19

[Faint handwritten notes and signatures in the bottom right corner]




10

No. L.S. 2672 of 1919.

Municipal Office,
Karachi, 31st May 1919.2/6

M E M O /-


The Superintendent of Machinery is requested
to return the correspondence regarding the drainage work on
plot No. 117.C-6 Market Quarter.



M. I. M. E.,

Acting Engineer

Karachi Municipality.



4/6

11

30/3/19

Memo.

The Superintendent of Machinery
is requested to return the papers correspondence
regarding the drainage connection work on
plot No. 117 C6 Market Quarter.

M. I. R.M. I. R.
Ag. Engineer. B. my.



GULAMHUSEIN ALIBHOY KARIMJI.

Hon Secretary "FAIZ-E-ALVI"

Karachi City, 12th May 1919.

The Chief Officer & Chief Engineer

Karachi Municipality.

Karachi.

Sir,

Drainage work on Plot 117 c6 Market Quarter.

Land surveyor for 75 report.

Your notice no:G4748 dated 1/2 Inst. was received by me today on my return to Karachi. It was delivered at my office by an employee of another Mr. Gulamhusein Alibhoi who had received it from your office.

In connection with this I beg to state that arrangements were made to carry on the work of laying pipes as shown by the Superintendent of machinery when it appears the Engineer came to see the place and ordered quite a different way of laying the pipes involving the cutting open of a considerable portion of the floor and having the same enclosed by well etc.

As said before the pipes in question are not connected with W.C. but with a bath room and kitchen and they are laid not through a dwelling room but a godown which can never be used as a dwelling room. I understand that the Superintendent of machinery did not know these facts when he made his report to the Engineer, or else he would not have made the report.

I would now request you to enquire into the matter and if you cannot see your way to alter the order made by the Engineer, shall thank you to kindly place the correspondence before the *MC* for their final orders. I shall be glad if the managing Committ-

P.T.O.



12-2

The Chief Officer & Chief Engineer
Karnal Municipality.

12/1/19

M. Varma. Jr. to refuse

8/1/15

The papers are left so. m.
he may be requested to
return them

15/5/15

Subin. Nica for Mr.

Nachin P.

15/5/15

Attach I & C & picture

Mallu

8/1/15



13

GULAMHUSEIN ALIBHOY KARIMJI.

Hon Secretary "FAIZ-E-ALVI"

Karachi City, 191

(2)

would kindly inspect the building.

Yours faithfully.

Gulamhusain Alvi



FINAL NOTICE.

In continuation of Notice No. W.S. 602

dated 4/5th February 1919

Mr. Ghulam Hussain Allibhoy Son: Secretary Faiz-E-^{Alvi} hereby given

final notice that if the ~~drainage work~~ of ^{his} ~~their~~ house on plot

No. 117, C-6, Market Quarter, is not repaired and renewed

within three days from the date hereof, the same will be done by the Muni-

cipality at ^{his} ~~their~~ risk and cost.

For ^{his} ~~their~~ information an approximate estimate of the cost is given below and if the work is performed by the Municipality this amount together with all other expenses incurred in connection therewith will be recovered from ^{his} ~~their~~ as the law directs.

Approximate Estimate.

36' C.I. pipe for under ground drainage	Rs 140-0-0
30' C.I. pipe 4" for W.W. pipe	" 60-0-0
2 manholes including C.I. covers	" 60-0-0
1 T.C.I. 4"	" 10-0-0
2 Pends 4"	" 6-0-0
400 Cubic ft. masonry work @ Rs40 per 100 cubic feet	" 160-0-0
Labour charges	" 40-0-0
Total Rs	476-0-0
Contingencies charges at 10 %	47-8-0
Supervision charges at 5 %	23-12-0
Grand Total Rs	547-4-0

M. INST. C. E.,

Chief Officer and Chief Engineer,

Karachi Municipality.

No. G. 4746 of 1919.

MUNICIPAL OFFICE,

Karachi, 1st May 1919.

No. G. 4747 of 1919.

MUNICIPAL OFFICE,

Karachi, 1st May 1919.

Copy forwarded to the Engineer. If this notice is not complied with the required work is to be done by the Municipality without further delay and all expenses recovered from the owner.

M. INST. C. E.,

Chief Officer and Chief Engineer,

Karachi Municipality.



NO: W/ 1296 of 1919.

SUPERINTENDENT OF MACHINERY'S OFFICE.

KARACHI 16th April 1919.

MEMO / -

With reference to the attached correspondence the Superintendent of Machinery has the honour to forward herewith the required estimates.

36' C. I. Pipe for under ground drainage.	RS. 140-0-0
30' C. I. Pipe 4" for W. W. Pipe .	RS. 60-0-0
Two Manholes including C. I. covers.	RS. 60-0-0
One T. C. I. 4" .	RS. 10-0-0
Two Bends 4" .	RS. 6-0-0
400 Cubic ft. masonry work @ RS. 40/- per 100 Cubic ft.	RS. 160-0-0
Labour charges.	RS. 40-0-0

Total RS. 476-0-0

Contingencies charges @ 10 % 47-8-0

Supervision charges @ 5 % 23-12-0

GRAND TOTAL RS. 547-4-0

*Forwarded to the
CO. Ch. for our
reviewing find noted.
25/4/19*

*O.S.
25/4*



Zulsidar M

M. I. M. E.

SUPERINTENDENT OF MACHINERY.

KARACHI - MUNICIPALITY.



Sir,

16-1
With reference to the attached
I beg to state that I received the correspondence
on Friday 7th inst at 3 P.M.

7 $\frac{3}{19}$.yours obediently
Laxmichand
D.9.

Sir,

I learnt from the Land Surveyor
that the Engineer desires to meet the Surveyor
of Machinery on the ground regarding this matter

7 $\frac{3}{19}$.yours obediently
Laxmichand.

Returned to the Engineer who is requested
to kindly make another appointment

 $\frac{8}{3/19}$ W.M.

16-2

The up & down machine was
shown on the 1st ^{to day} what
was necessary to connect
with the CO. R.R. in 9
9922 dated 8/11 May
1918.

Nov 3/8

Do I suppose the
owner what is required
of him & report at once
11/3/19 Hehl

The CO & C. units on the
said pipe being on 948 ✓
an external wall which would
not be possible with the arrangements
suggested. Still 12/3/80

17

Sup^d Mr. [unclear] why are these
papers returned. ~~the~~ ^{the} ~~the~~ ^{the}
took the trouble to go on
the pond & explain
the requirements of the
CO. & C. as per his
Mem^o No 9922 dated
8th May 1918

the the requirements
of machinery

W/1033
273
4

12/3/19

Returned to
the owner by
the

The work necessary
has been planned
out to be the owner
and his licensed plumber
& ^{as per his} ~~the~~ ^{the} ~~the~~ ^{the}
Master. The owner
states he has written
instructions from the
business as to what has
to be done, although, it
has been explained to
him by the Drainage
Inspector. Hence the
correspondence is
again returned for
instructions, or for a
final notice being
issued by the CO & C.
If the latter, an estimate
can be submitted

24
3/19 All

Submit Estimate for final
notice.

V. 24/3/19

D. I. to prepare estimate
& return same

All 31/3/19


W 1159
1/4
4



NO: W/763 of 1919.

SUPERINTENDENT OF MACHINERY'S OFFICE.

KARACHI 4th March 1919.

MEMO /-

With reference to NO: L.S. 896 dated 22nd February 1919, the Superintendent of Machinery has the honour to report that the owners desire to put the work right.

The W.W. pipe coming from the bath rooms situated behind the sleeping rooms can be connected with the drain going underneath the godown laid in a bedding of concrete according to the rules and as shown on the plan.

But as regards the drainage of kitchen rooms on the first and second floor & pump fitted on the first floor nothing is mentioned. If these conveniences are to be retained the only way is to connect ^{them} ~~it~~ with the drain of the bath room situated on the first floor in the front. Can this be done?

Complete F.C. is herewith returned.



*Sup. to Mr. [unclear] please
write up on the front
on Friday morning 7th inst.
with 4/c. 1.5/3/19*

M. I. M. E.

SUPERINTENDENT OF MACHINERY.

KARACHI MUNICIPALITY.

*D. & L. - L/S will be at Makhi
please turn up without fail
with this correspondence*

6/3/19

Hall

*W/827
8.3.19*

*W867
2.8.21*

GULÁMHUSEIN ALIBHOY KARIMJI.

Hon Secretary "FAIZ-E-ALVI"

65/14/1918

19-1

Karachi City, 13th February 1918.

To,

The Engineer

Karachi Municipality,

Karachi.

Dear Sir,

In reply to your Memo No.L.S.303 dated 4th/5th inst, although the drainage work is in no way insanitary and as mentioned before was not considered objectionable by the Superintendent of Machinery owing to the fact that the pipes in question are not connected with Water Closets, but as you wish it I am arranging to have the said pipes laid underneath the floor. It will be some days before the work can be carried out because the tenant whose goods are stored in the room has gone to his native place and therefore nothing can be done till he returns to Karachi.

I am Dear Sir,

Yours faithfully,

1494
13/2/18

Gulamhusein Alibhoi
Honorary Secretary,

FAIZ-E-ALVI.



u. Varan pte return to L.S.
or

14/2
It is herewith attached

17/2 Copy

Sir,

They to report that
the applicant is willing
to alter the pipes after
his tenants returned to work.

Request your order.

Yours ally
Nashid

18
2/19

Reply that the work
cannot be allowed to remain
at the disposal of a
tenant who has gone to
his native place & he
there for 12 months.

If a definite undertaking
is given that the work will
be removed within one month
permission will be granted.
failing which it will be deemed
as his default. D. 22/2/19

Copy to Dept. is given



20

No. L.S. 602 of 1919.

Municipal office,

Karachi 4th February 1919.

5

MEMO,

With reference to his application dated 28th ultimo Mr. Ghulam Musein Allibhey, Honorary Secretary of Faiz-E-Alvi is referred to No. L.S. 1304 dated 20th August 1918 and informed 23rd that the drainage work as laid is contrary to the byelaws and insanitary and cannot be permitted.

Instructions are hereby given him to remove it at once failing which steps will be taken under the Act.

A. M. Inst. C. E.,

Engineer,

Karachi Municipality.

No. L.S. 603 of 1919.

Municipal office,

Karachi 4th February 1919.

5

Copy forwarded to the Superintendent of Machinery in continuation of No. L.S. 380 dated 23rd January 1919 for report 24th

A. M. Inst. C. E.,

Engineer,

Karachi Municipality.

803

92

Remo.

With reference to his application of
28th ultimo. Mr. Ghulam Hussain Alibhoy,
Honorary Secretary of Faiz E-Alvi is referred to
to L.S No. 1304 D/ 20/30 Aug 1918 and informed
that the drainage work as ~~already stated~~
said is contrary to the Bye-laws and
unsanitary and cannot be permitted.

Instructions are hereby given him to
remove it at once, failing which steps
will be taken under the Act:-

V.

Copy forwarded to the Superintendent of
Machinery in continuation of L.S No. 380
of $\frac{23}{24}$ January 1919 for report.

V.

RECEIVED



GULAMHUSEIN ALIBHOY KARIMJI.

Hon Secretary "FAIZ-E-ALVI"

22-1
Karachi City, 28th January 1918.

To,

The Engineer

Karachi Municipality,

Karachi.

Dear Sir,

Landimiyon
for 7c report.

With reference to your memo No. 23rd/24th inst, re drainage pipes on plot No. 117 C 6 market quarter, I beg to bring to your notice that the pipes in question drain the water from bath rooms only and are not at all connected with W.C. closets. Then again as said before the pipes pass through a godown which there is no possibility of ever being used as a dwelling room. I believe the Superintendent of Machinery was not aware of these facts when he originally wrote to me on the subject otherwise I am sure he would not have done so. The fixing of the pipes on the side of the walls instead of underneath the floor, would be objectionable if they drained water closets and if the room was a dwelling room and not a godown as it is..

1037

Perhaps these facts were not brought to your notice before this and therefore taking them into consideration I hope you will allow the pipes to remain as they are.

Thanking you in anticipation.

I am Dear Sir,
Yours faithfully,
Hon. Sec. Faiz-E-Alvi.



Mr. Varnum to J.C. Mead

3/21/11

F.C. is herewith attached

3/1/11

Submitted a reply
has not yet been
received from the S.F.
machinery. Report on

Nathaniel

3/1/11

Refer application to No.

L.S. ~~1304~~ 1304 dated

23 Aug and say that as

already informed the

drainage work as laid

is contrary to the by-laws

and in violation of court

be permitted and must be

removed at once.

V. 3/1/11

Copy to the Sup. E. y. H. only
in continuation of No. 1304
dated 23 Jan. 11 report.

N. Varnum
Ch. 1/1



23

No. L.S. 379 of 1919.

Municipal office,

Karachi 23rd January 1919.

23rd

MEMO,

Regarding plot No. 117, C-6 Market Quarter.

In continuation of No. L.S. 1304 dated 20th August 1918 & No. L.S. 1709 dated 24th September 1918 Messrs Yusafali Mahomedali Mula Lukmanji Ghulam Fusein Alibhoi Karimji, President and Secretary of the Faiz-allawari are informed that as requested the Superintendent of Machinery has explained on the ground to them what is necessary to make their drainage work on the above plot comply with the regulations and ample time given them to carry out the necessary alterations but nothing has been done. Instructions have been issued to remove the insanitary drainage work at once at their risk and cost.

A. M. Inst. C. E.

A. M. Inst. C. E.,

Engineer,

Karachi Municipality.

No. L.S. 380 of 1919.

Municipal office,

Karachi 23rd January 1919.

23rd

Copy to the Superintendent of Machinery to remove the drainage work at once and report compliance.

A. M. Inst. C. E.

A. M. Inst. C. E.,

Engineer,

Karachi Municipality.

80

Memorandum The plot No 117 C 6 Thakur Q.V. 24

In continuation of No. L. S. 1304 dated

20 Aug 1918 & No L. S. dated 1709 dated

24 Sept. 1918. ~~Mr. Shamlal Hussain Alibhai~~
~~dukhlaiji Chulani Hussain Alibhai Karingji~~
~~Karingji, the President Secretary of the~~

Fay-allawari are informed that as
 requested the S.O.M. has explained on
 the pond to them what is necessary to
 make their drainages work, comply
 with the regulations & sample time
 given, to carry out the necessary
 alterations but nothing has been
 done. Instructions have been issued
 to remove the inconvienient & drainage
 work at once, at their risk & cost.

23/1/15

Copy to the S.O.M. to remove the drainage
 work at once & report completed.

Ty/co
 JH
 23/1



Municipal office,

Karachi 8th January 1919.

MEMO,

The Superintendent of Machinery is requested to

report in connection with the correspondence of Mr. Ghulam
 Husain Allibhoy Karimji Honorary Secretary Faiz-E-Alvi plot
 No. 117 C-6 Market Quarter and whether he kept an engagement
 with the owner ^{and} explained him on site what was to be done.

A. M. Inst. C. E.,

Engineer,

Karachi Municipality.

Mrs M/S met Mr.
 Ghulam Husain
 Allibhoy & also Mr.
 Yusefali Moul Commission
 on the site. The latter
 promised to see the Engr.
 on the subject to explain
 that the room the pipes ran
 through was & always would be used as a
 bedroom & not living room. M/S has heard nothing
 further the matter. Made 13/1/19

25-2



Heritage

KMR.CDD.MaQ.1917-1919.01

Mr. Wawani please
attach the report.

Nathaniel
It is herewith ~~attached~~ ^{to}

24/1/9 for

8
submitted to the Engr.
for order.

Nathaniel
20/5

The 2nd and 3rd
divisions of the
Maddur taluk are
under the control of
the 1st division. The
1st division is the
only one in the
Maddur taluk. The
2nd and 3rd divisions
are under the control
of the 1st division.

Municipal Office 26
Karachi. 7/1/9

Urgent
Memo,

The Superintendent of Machinery
is requested to report in connection with the
Correspondence of Mr. Ghulam Hussain
Allibhog Karimji Honorary Secretary Faiz-e-Alvi
Plot No. 117 C6 Market Quater, whether he
kept an engagement with the owner &
explained him on site what was to be
done?

J. G. H. Kirby

M2

For Mr. Kirby
5/2

27

No. L.S. 1709 of 1918.

Municipal Office,

Karachi, 24th September 1918.

M E M O /-

Re plot No. 117.C-6 Market r.

With reference to his letter dated 26th August 1918 Mr. Chulab Hussain Alliboy Karimji Honorary Secretary Fair-7-Alvi is informed that No. L.S. 1304 dated 20th August 1918 informs him of what is necessary to be done. If he desires a personal explanation on the ground the Superintendent of Machinery will meet him there and explain.

J. A. H. Kerby

A. E. Inst., C. E.,

E n g i n e e r

Karachi Municipality

No. L.S. 1710 of 1918.

Municipal Office

Karachi, 24th September 1918.

Copy to the Superintendent of Machinery with copy of No.L.S. 1304 for information and guidance.

J. A. H. Kerby

A. E. Inst., C. E.,

E n g i n e e r

Karachi Municipality.

M

5/10/18

28

Inform applicant that no L.S.
1304 dated 20 Aug 1918 informs
him of what is necessary to be
done. If he desires a personal
explanation on the ground the
Sup^{ty} of the city will meet him
there and explain.

V. 19/8/18

Copy to the Sup^{ty} of the city with
copy of no L.S. 1304 for information
and guidance.



GULAMHUSEIN ALIBHOY KARIMJI.

Hon Secretary "FAIZ-E-ALVI"

Karachi City, 26th August 1918.

Cmpt
ml
26/8Land Surveyor
attach to report.

The Chief Officer and Chief Engineer
Karachi Municipality,
Karachi

Dear Sir,

In reply to your letter No.L.S.1304 of
20th/23rd inst-received on the 24th-I beg to state that
I addressed a letter to the Engineer on 15th December
1917 in reference to his letter No.E11065 dated 14th
December 1917 re laying of soil pipes of the bath room
on Plot No.117 C-6, Market Quarter to which no reply
has been given.

I am Dear Sir,

Yours faithfully,

Gulamhusain Alibhoi Karimji

Honorary Secretary,

Faiz-E-Alvi.

7267.



Sir

J. C. is herewith
attached.

Yours truly,
J. C. [Signature]

Mr. Blason - please
explain why the rpf
has not been sent to the
letter dated the 15th Dec. 17

Nathu

²/₁₀
The letter of 15th Dec. 1917 was
forwarded to the S.O. M. and was
in the correspondence carried on
with him the rpf was not sent
to him.

sd/

13/9/18.

Submitted to the Engr.
for information.

¹³/₉ 18 Nathu

30
No. L.S. 1304 of 1918.


Municipal Office,
Karachi, 20th August 1918.

23.

M E M O /-

Messrs Yusafali Mahomedali Kula Lukmanji Ghulam Hoosein Allibhoy Karimji, President and Secretary of the Faiz-allawari are hereby notified to remove the drainage work of building recently erected on plot No. 117.0-6 Market Quarter as the same has been laid in a manner which is very insanitary. The soil-pipe from the drainage fittings is taken down on an internal wall to the ground floor contrary to the Bye-laws and joins the drain in an enclosed space which cannot be permitted as such connection must be made in a space entirely open to the sky.

The drains must therefore be entirely removed within 7 days from the receipt of this notice or Municipality will do the needful at their risk and cost.

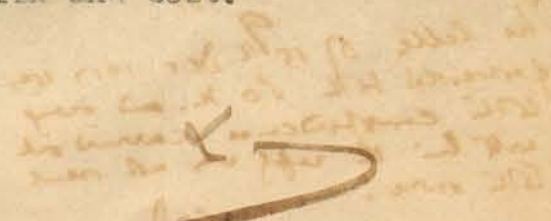
H. Inst., C. E.,
Chief Officer and Chief Engineer
Karachi Municipality.

802

No. L.S. of 1918.

Municipal Office,
Karachi, 15th August 1918.

M E M O/-

Messrs Yusifali Mahomedali Mula Lukmanji Ghulam
Hoosein Allibhoy Karimji, President and Secretary of the Faiz-
allawari are hereby notified to remove the drainage work of
building recently erected on plot No. 117.C-6 Market Quarter
as the same has been laid in a manner which is very insanitary.

The soil-pipe from the drainage fittings ^{is} must be taken down on
an ~~external~~ ^{internal} wall to the ground floor which ~~must also be open~~ ^{cutting to the sky and join the drain}

to sky and a manhole provided in such open space and therefrom

a drain encased in concrete carried under the building to the
street. ^{is a enclosed space. which cannot be join the}

~~as all connection with the main drain is to be made in a space entirely open to the sky.~~
~~Arrangements must be made for the connection~~

from the kitchen to enter the drain on the ground floor in a
space entirely open to sky.

The drains must therefore be entirely removed
within 7 days from the receipt of this notice or Municipality
will do the needful at their risk and cost.


M. Inst., C. E.,

Chief Officer and Chief Engineer

Karachi Municipality.

88



32

No. L.S. of 1918.
Municipal Office,
Karachi, 15th August 1918.

MEMO/-

Messrs Yusifali Mahomedali Mula Lukmanji Chulam
Hoosein Allibhoy Karimji, President and Secretary of the Waiz-
allawari are hereby notified to remove the drainage work of
building recently erected on plot No. 117.C-6 Market Quarter
as the same has been laid in a manner which is very insanitary.
The soil-pipe from the drainage fittings must be taken down on
an external wall to the ground floor which must also be open
to sky and a manhole provided in such open space and therefrom
a drain encased in concrete carried under the building to the
street.

Arrangements must be made for the connection
from the kitchen to enter the drain on the ground floor in a
space entirely open to sky.

The drains must therefore be entirely removed
within 7 days from the receipt of this notice or Municipality
will do the needful at their risk and cost.

M. Inst., C. E.,
Chief Officer and Chief Engineer
Karachi Municipality.

802



Heritage

KMR.CDD.MaQ.1917-1919.01

No. L.S. of 1918.

Municipal Office,
Karachi, 10th August 1918.

M E M O /-

Messrs Yusifali Mahomedali Mula Lukmanji Ghulam Hoosein Allibhoy Karimji, President and Secretary of the Faiz-Allawari are hereby notified to remove the drainage work of building recently erected on plot No. 117.C-6 Market Quarter as the same has been laid in ~~the~~ manner which is very insanitary. ~~The drainage fitting of this house cannot possibly be put under sanitary conditions unless~~ *The soil-pipe ~~therefrom~~ ^{the drainage fittings must} can be taken down on an external wall to the ground floor which must also be open to sky and a manhole provided in such open space and therefrom a drain encased in concrete carried under the building *to the street.**

~~Further it is not possible to provide drainage arrangements to a kitchen situated as in this building with the whole of the ground floor underneath and contiguous thereto forming enclosed buildings.~~

The drains must therefore be entirely removed within 7 days from the receipt of this notice or Municipality will do the needful at their risk and cost.

M. Inst., C. E.,

Chief Officer and Chief Engineer
Karachi Municipality.

- arrangement must be made for the connection from the kitchen to enter the drain on the ground floor in a space entirely open to sky.

862

34

No. L.S. of 1918.

Municipal Office,
Karachi, 10th August 1918.

M E M O /-

Messrs Yusifali Mahomedali Mula Lukmanji Ghulam Hoosein Allibhoy Karimji, President and Secretary of the Faiz-Allawari are hereby notified to remove the drainage work of building recently erected on plot No. 117.C-6 Market Quarter as the same has been laid in the manner which is very insanitary. The drainage fitting of this house cannot possibly be put under sanitary conditions unless the soil-pipe therefrom can be taken down on an external wall to the ground floor which must also be open to sky and a manhole provided in such open space and therefrom a drain encased in concrete carried under the building.

Further it is not possible to provide drainage arrangements to a kitchen situated as in this building with the whole of the ground floor underneath and contiguous thereto forming enclosed buildings.

The drains must therefore be entirely removed within 7 days from the receipt of this notice or Municipality will do the needful at their risk and cost.

M. Inst., C. E.,
Chief Officer and Chief Engineer
Karachi Municipality.

M

802

No. L.S. of 1918.

Municipal Office,
Karachi, 27th July 1918.

M E M O /-

Messrs Yusifalli Mahomedali Mulla Lukmanji Ghulamhoosain Allibhoy Harimji, President and Secretary of the Faiz-Allawari are hereby notified to remove the drainage work of building recently erected on plot No.117-C.6 Market Quarter as the same has been laid in ~~an~~ manner which is very insanitary.

No drainage fitting can possibly be put into a house under sanitary conditions unless the soil-pipe therefrom can be taken down on an external wall to the ground floor which must also be open to the sky and a manhole provided in such open space and therefrom a drain encased in concrete carried under the building where such is required for the circumstances of the case.

It is not possible to provide drainage arrangements to a kitchen situated as in this building with the whole of the ground floor underneath and contiguous thereto forming enclosed buildings.

The drain must therefore be entirely removed within 7 days from the receipt of this notice or Municipality will do the needful at their risk and cost.

*This document is a copy of the original
sent to the Municipal Office
on the 27th July 1918
and the same is a
true copy of the original
sent to the Municipal Office
on the 27th July 1918
and the same is a
true copy of the original
sent to the Municipal Office
on the 27th July 1918*

M. Inst., C. E.,

Chief Officer and Chief Engineer

Karachi Municipality.

JL

*Recd on
9-8-18
JL*

3/8/18

No. L.S. of 1918.

Municipal Office,

Karachi, 27th July 1918.

M E M O /-

Messrs Yusifalli Mahomedali Mulla Lukmanji Ghulamhoosain Allibhoy Harimji, President and Secretary of the Faiz-Allawari are hereby notified to remove the drainage work of building recently erected on plot No.117-C.6 Market Quarter as the same has been laid in the manner which is very insanitary. ^{The} ~~No~~ drainage fitting ^{of this house} ~~can possibly be put into a house~~ under sanitary conditions unless the soil-pipe therefrom can be taken down on an external wall to the ground floor which must also be open to the sky and a manhole provided in such open space and therefrom a drain encased in concrete carried under the building. ~~where such is required for the circumstances of the case.~~

^{Further} It is not possible to provide drainage arrangements to a kitchen situated as in this building with the whole of the ground floor underneath and contiguous thereto forming enclosed buildings.

The drain must therefore be entirely removed within 7 days from the receipt of this notice or Municipality will do the needful at their risk and cost.

Please Reply to
SO

M. Inst., C. E.,
Chief Officer and Chief Engineer
Karachi Municipality.

M



No. L. S. of 1918.

Municipal Office.

Karachi. 16th July 1918.

M E M O .

Messrs. Yusifalli Mahomedalli Mulla Lockmanji, Ghulam Hussain Allibhoy Karimji, president and Secretary of the Faiz - Allawari are hereby notified to remove the drainage work of building recently erected on plot No: 117 D - 6 Market Quarter as the same has been laid in a manner which is very insanitary.

This must be done within 7 days from the receipt of this notice of Municipality will do the needful at their risk and cost.

*Minister +
assmt*

M. Inst., C. E.,

Chief Officer & Chief Engineer.

P. P. Karachi Municipality. *864*

No. L. S.

of 1918.

Municipal Office.

Karachi. 16th July 1918.

M E M O .

Messrs. Yusifalli Mahomedalli Mulla Lockmanji, Ghulam Hussain Allibhoy Karimji, president and Secretary of the Faiz - Allawari are hereby notified to remove the drainage work of building recently erected on plot No: 117 C - 6 Market Quarter as the same has been laid in a manner which is very insanitary.

~~This must be done~~ within 7 days from the receipt of this notice of Municipality will do the needful at their risk and cost.

M. Inst., C. E.,

Chief Officer & Chief Engineer.

Karachi Municipality.

no drainage fittings can possibly be put into a house
not sanitary conditions unless the soil pipe emerges
on the side wall or an external wall from ground
floor level and also be open to the sky as a main drain
provided a brick or concrete structure & drain carried
in concrete carries up the building where such
is required for the structure of the house.
It is not possible to provide any other arrangement
to make suitable as this belongs to the main
of the ground floor & small receptacles for water
included building work.
The same must be a well known rule.

No. L.S. 445 of 1918.

Municipal Office,

Karachi, 17th July 1918.

27

M E M O /-

With reference to his endorsement under No. W/2709 dated 3rd July 1918 the Superintendent of Machinery is requested to give the name of plumber who carried out the drainage work on plot No. 117, G.6 Market Quarter owned by Messrs Yusafali Mahomedali Mulla Lookmanji Ghulam Hoosain Allibhoy Karimji President and Secretary of the Fair Alawari also the name of Maistry who passed the work.

This is urgent.

J. A. H. Verley

A. M. Inst., C. E.,

E N G I N E E R

Karachi Municipality.

M

802

40-1

L.S. No 217 of 1918.

Municipal Office,
Karachi, 20th June 1918.

24

M e m o:-

Messrs. Yusfalli Mahomedalli Mulla Lookmanji, Ghulam Hussain Allibhoy Karimji, president & Secretary of the Faiz-Allawari are hereby notified to remove the drainage work of building recently erected on plot No. 117, C-6, Market Quarter as the same has been laid in a manner which is very insanitary.

This must be done within 7 days from the receipt of this notice or Municipality will do the needful at their risk & cost.

A. M. Inst., C.E.

A. M. Inst., C.E.
Engineer,
Karachi Municipality

L.S.No. 218 of 1918

Municipal Office,
Karachi, 20th June 1918.

24

Copy forwarded to the Superintendent of Machinery to report name of the Drainage Maistry.

Drainage
Water Works Maistry

for attention and report.

state when the work has been done

26/6/18

A.M. Inst., C.E.
Engineer,
Karachi Municipality.

*W/2543
27.6.18.*

[Handwritten notes and signatures]

Sir,

40-2



KMR.CDD.MaQ.1917-1919.01

I beg to report that I
went to inspect the building
when the owner ~~refused~~
entrance and said that he
will put me in jail, if I
again go there.

yours truly
H. E. Bhatnagar
i.e. Hossan Bhatnagar

2¹/₈ Baing Maist

Forwarded to the
Superintendent for favour
of order being issued

3/18 H. E. B.
LS

attach 7/c
V. 7/18

W/2709
3.7.18

5733
4.7.18

Sir

I.C. is herewith attached

yours truly.

5.7.18. H. E. B.

Sir

I.C. attached the
Superintendent has not given
the name of the drainage
maist as requested in
the above memo.

yours truly
Nathaniel

Wants Sup. to the
dubious name of plumber &
thief - some notice on
work done by C.O. & C.

0.7.18

41

L.S. No 217 of 1918.
Municipal Office,
Karachi, 20th June 1918.

M e m o:-

Messrs. Yusfalli Mahomedalli Mulla Lookmanji,
Ghulam Hussain Allibhoy Karimji, president & Secretary of the
Faiz-Allawari are hereby notified to remove the drainage work
of building recently erected on plot No. 117, C-6, Market Quar-
ter as the same has been laid in a manner which is very in-
sanitary.

This must be done within 7 days from the receipt
of this notice or Municipality will do the needful at their
risk & cost.

J. G. H. Verley

A. M. Inst., C.E.

E n g i n e e r,

M Karachi Municipality

L.S.No. 218 of 191

Municipal Office,

Karachi, 20th June 1918.

24
Copy forwarded to the Superintendent of Machinery
to report name of the Drainage Maistry.

J. G. H. Verley

A.M. Inst., C.E.

E n g i n e e r,

Karachi Municipality.

80

L. S. No of 1918.

Municipal Office,
Karachi, 19th June 1918.

M e m o.

The Superintendent of Machinery is requested to give the name of the drainage Maistry who allowed the work to be carried out on plot No. 117, C-6, Market Quarter.

A. M. Inst., C.E.

Engineer,
Karachi Municipality.

Memo no. G. 9922 Of 8 May 1918
to be typed

forward
as copy to The S.O. Machinery to report
name of drainage maistry.

Mem. Yusuf Ali. Mahomed Ali, Kulla Dost Manji
Ghulam Hussain, Allubhai, Kariji, Beroine &
Secretary of the Fair Hussain all aware are
being notified to remove the drainage work
of bldg. on plot no. 117 C-6 Market Qr.
as the same has been laid in a manner
which is quite very unsatisfactory.
This must be done within 7 days from
the receipt of this notice or the Municipality
will do the work at their risk & cost.



Heritage

KMR.CDD.MaQ.1917-1919.01

KARACHI MUNICIPALITY.

TELEPHONE No. 6.

MEASHAM LEA, A.M. INST. C.E.
CHIEF OFFICER AND CHIEF ENGINEER.

Reference No. G 9922 of 1918,

MUNICIPAL OFFICE,

KARACHI,

8th May 1918.
11*to be taken
attach 3/0
1.15/5/18*

Memo:-

Engineer

Reference to No. E 3881 dated 22nd April 1918.

No drainage fitting can possibly be put into a house under sanitary conditions unless the soil pipe therefrom can be taken down on an external wall to the ground floor which must also be open to the sky and a manhole provided in such open space and therefrom a drain encased in concrete carried under the building where such is required for the circumstances of the case.

These conditions are not complied with in the suggested Scheme submitted.

It is not possible to provide drainage arrangements to a kitchen situated as this is with the whole of the ground floor underneath and contiguous thereto forming enclosed buildings.

The drain must be entirely removed.

The drainage Maistry who passed this work and the Plumber to be fined Rs 5.

M. Inst. C. E.,

Chief Officer & Chief Engineer,
Karachi Municipality.*MM**4236
16/5/18*

20.

Sir,

LC attached -
yours truly
Nathan

27/5/18

The LC is not attached
where is it?

1. 28/5/18

Sir,

I beg to report
that the LC forwarded
to the Chief Officer and
Chief Engineer when
the order has been passed
by the Chief Officer &
Chief Engr. -

yours truly
Nathan

3/6/18

Recd Clerk please about
LC & return to the
at once. sent. h. V. V.



44

5024 Landsurveyor
~~with J. J. Frederick~~
Send copy to C. J. V. E.
letter them to S. D. M.
to report name of
drainage mainly
in ~~the~~ ~~the~~

Sends notice on
owner to undo
drainage work
~~contract~~ ~~to~~ ~~be~~ ~~done~~
which is insensate

N

12/1/18

Byrding surveyor please
write to the superintendent
of machinery to report the
name of the drainage
mainly to allow the work
carried out of plot no 17.01
in annex 24. Nathan



Karachi

8.8.1918

Sir,

With reference to the attached,

I beg to report that the name of
the required plumber is Sin Mahmud.

For Mahmud and the name of the
required Maistry is Amir Maistry.

Forwarded to the Engineer
for information
8/8
Mall

Land Revenue
attach
V. 10/8/18

I beg to remain
your most obedient servant
D. Maistry.



Heritage

KMR.CDD.MaQ.1917-1919.01

No. L.S. 445 of 1918.

Municipal Office,
Karachi, 17th July 1918.

27

46

M E M O /-

With reference to his endorsement under No. W/2709 dated 3rd July 1918 the Superintendent of Machinery is requested to give the name of plumber who carried out the drainage work on plot No. 117. C.6 Market Quarter owned by Messrs Yusafali Mahomedali Mulla Lookmanji Ghulam Hoosain Allibhoy Karimji President and Secretary of the Fair Alawari also the name of Maistry who passed the work.

This is urgent.

W 3059 / 29-7-18

J. Cant. L. Verley

A. M. Inst., C. E.,

E N G I N E E R

Karachi Municipality.

B

SL

Memo.

Mainase Maistry Hosan
for attention & report.

J. C. H.

29/7/18

47
No. E 3 881 of 1918.

Municipal Office.

Karachi. 22nd April 1918.

1/5/18

MEMO / -

In continuation of Undersigned report No. E 11088 dated 14th December 1917 and the Chief Officer and Chief Engineer's endorsement ~~thereon~~ on the Managing Committee's resolution No. 51 dated 15th January 1918 Undersigned has the honour to report that at present the soil pipe from the bath room is brought down into the godown and carried under the ceiling of the godown to the front of the building in Katchiwara Lane No. 1 where it is connected with the drain and there is nothing to prevent sewer gas getting into the godown and permeating into the living rooms.

The soil pipe should have been taken down in the open space to the West of the godown and carried out into Katchiwara Lane No. 1 under the floor of the godown the pipes being laid in cement concrete as provided for in the bye-laws.

A plan is submitted showing in blue how the soil pipe has been taken and in red how it ought to have been taken. *It is attached.*

A.M.Inst.C.E.,

Engineer

Karachi Municipality.

82



48-1

1919/120

1618T0 1832

SL. No. PERIOD

PLANT NUMBER

9A D-3 GR

16 B-3

179 K 8 LY

601 B 10 ST

117 C 6 MR

52 A 23 NP

63 K 11 LY

17 D 2 JL

90 A 21 NP

93 A 23

2 A 13 BR

16 K 11 LY

82 A 11 MR

916 D 332

148 H 7 601B

32 A 20 NP

222-229 A 2 O-T

5 K JULY

7-8-9 A 27 NP

179A - G 1 - 21B



48-2

Sl.No	PERIOD	PLOT NUMBER	AREA
1			
2			
3			
4			
5			
6			
7			
8			
9			
10			
11			
12			
13			
14			
15			
16			
17			
18			
19			
20			
21			
22			
23			
24			
25			
26			
27			
28			
29			
30			
31			
32			
33			
34			
35			

Memorandum

In continuation of a/c report No 8
11068 dated 10/12/17 and the M/c's
resolution No C.O. 128 endorsement
on the M/c's resolution No 51 dated
15th Jan 1918 a/c has the honour to
report that at present the soil pipe
from the bath room is brought down
into the go-down and carried under the
ceiling of the go-down to the front of the
building in Kutchinara Lane No 1
where it is connected with the drain
and there is nothing to prevent sewer
gas getting into the go-down & permeating
into the living room.
The soil pipe should have been taken
down in the open space to the West of
the go-down & carried out into Kutchinara
Lane No 1 under the floor of the go-down
the pipes being laid in concrete
concrete as provided for in the
by-laws.

A plan is submitted showing in
blue how the soil pipe has been
taken & in red how it ought to
have been taken.

1.10/1/18

as explained
1.10/1/18

10874

5th June 1918.

8

The Accountant is informed that Plumber Dinmahomed was fined Rs.5/- for doing bad work which was deducted from his deposit vide this Office No.10019 dated 14th May 1918 and credited under receipt No.7709 dated 23rd May 1918.

A sum of Rs.5 has been received from the Plumber to make up his deposit, but instead of being credited to Deposit Account was credited to General Account as fine inflicted for doing bad work under receipt No.7735 dated 29th May 1918.

He is therefore requested to adjust the amount accordingly to make the deposit up to Rs.200.

M. Inst. C. E. .
Chief Officer & Chief Engineer,
Karachi Municipality.

Wm



51

Karachi 22nd May 1918.

The Chief Officer & Chief Engineer,
K A R A C H I Municipality,
K A R A C H I.

Sir,

With reference to your letter Ref No G 10,018 of 15th
Inst I beg to send herewith under protest the sum of Rs 5/-
(Rupees five) being the fine for my alleged work against the
Bye-laws.

I shall feel obliged if you will kindly issue me
a license to resume work as Plumber.

I have the honour to be,

Sir,

Your most obedient servant.

دین محمد ترمحمد

ie Dinnmohamed Tarmohamed,
Plumber.

7735—

29-5-18



7735

52

Municipal Office,

Karachi, ^{to} 29 May 1918.Received from Mr. *Dinnahmed Ismahomed*the sum of Rupees *57. Five only.*being the amount of *fine for work done against the Byelaws**Appa P. Shinde*

Cashier.

Assistant Assessor and Collector,

Karachi Municipality.

10503.

25th May 1918.

28

In continuation of this Office No.10020 dated 14th May 1918, the Engineer is requested to state if Plumber Dinmahomed Tarmahomed is allowed to do the work of plumber still as he has not paid the fine of Rs.5/- which has been deducted from the deposit of Rs.200/-. He should not be allowed under any circumstances to work as Plumber till the fine deducted from his deposit is made good.

M. Inst. C. E. .

Chief Officer & Chief Engineer,

Karachi Municipality.

MM

2.

NO 9922-38.519



54

7709

Municipal Office,

Karachi,

23.5.

1918.

Received from Mr.

Said Ahmed Taha Ahmed

the sum of Rupees

5/-

being the amount of

Fine inflicted on him
for driving bad car

Perman

Cashier.

Per

Assistant Assessor and Collector,

Karachi Municipality.



Reference No. G 10,018 of 1918.

Mem o:-

Plumber Dinmahomed Tarmahomed is informed that as he has laid soil pipes of the bath room on plot No. 117, C-6, Market quarter inside the house along the ceiling, which is against the Bye-laws he is fined Rs 5/-.

This amount has been deducted from his deposit of Rs 200/- and his deposit should be made up to the full amount until which time he is without a license and will be liable to the penalties prescribed for carrying on work without a license.

The drain must be entirely removed.

M. Inst. C. E.,
Chief Officer & Chief Engineer,
Karachi Municipality.

~~~~~  
No. G 10,019 of 1918,  
Municipal Office,  
Karachi 14th May 1918.

Copy forwarded to the Accountant to deduct Rs 5 from the deposit made by plumber Dinmahomed Tarmahomed and send to Head Clerk for credit towards fines.

M. Inst. C. E.,  
Chief Officer & Chief Engineer,  
Karachi Municipality.  
~~~~~  
No. G 10,020 of 1918,
Municipal Office,
Karachi 14th May 1918.

Copies forwarded to the Engineer for information. in copy of
No 9922 of 8.5.18.

M. Inst. C. E.,
Chief Officer & Chief Engineer,
Karachi Municipality.

ml



55-2

810,01

Corkier :-

Please Credit Rs 5/-
towards fine withheld
on the plumber for
doing work.

Wm. J. W. W.
Head Clerk
Korocin Municipal

23/5/18.

Rs 7709

23/5/18
W

810,01

W

to be added to 8.10
of 1918
W



56

Reference No. G 9922 of 1918.

8th May 1918.

Memo:-

Engineer

Reference to No. E 3881 dated 22nd April 1918.

No drainage fitting can possibly be put into a house under sanitary conditions unless the soil pipe therefrom can be taken down on an external wall to the ground floor which must also be open to the sky and a manhole provided in such open space and therefrom a drain encased in concrete carried under the building where such is required for the circumstances of the case.

These conditions are not complied with in the suggested Scheme submitted.

It is not possible to provide drainage arrangements to a kitchen situated as this is with the whole of the ground floor underneath and contiguous thereto forming enclosed building.

The drain must be entirely removed.

The drainage Maistry who passed this work and the Plumber to be fined Rs 5.


M. Inst. C. E.,

Chief Officer & Chief Engineer,

2 Karachi Municipality.

MM

OP
Copy to acct -
The Plumber to be
informed that the fine
has been deducted
from his report
which should be
made good

11/5



57



No. E 2881 of 1918.

Municipal Office.

Karachi. 22nd April 1918.

1/5/18

M E M O / -

In continuation of Undersigned report No. E 11068 dated 14th December 1917 and the Chief Officer and Chief Engineer's endorsement ~~thereon~~ on the Managing Committee's resolution No. 51 dated 15th January 1918 Undersigned has the honour to report that at present the soil pipe from the bath room is brought down into the godown and carried under the ceiling of the godown to the front of the building in Katchiwara Lane No. 1 where it is connected with the drain and there is nothing to prevent sewer gas getting into the godown and permeating into the living rooms.

The soil pipe should have been taken down in the open space to the West of the godown and carried out into Katchiwara Lane No. 1 under the floor of the godown the pipes being laid in cement concrete as provided for in the bye-laws.

A plan is submitted showing in blue how the soil pipe has been taken and in red how it ought to have been taken. *7c is attached*

Wm. L. Verley

A.M.Inst.C.E.,

Engineer

Wm. Karachi Municipality.

OS for report if this license has been renewed for 1918/19
Wm.
3/5/18.
Su.

The license has been renewed for the current year 1918/19.

Submitted for order,
Wm.
8/5

Yours obediently
Office Superintendent
Karachi Municipality
7/5



To,

58
The Engineer
Karachi Municipality

Sir,

With reference to the
attached correspondence
re the drainage pipes
laid contrary to the bye
laws &c. they to submit
a tracing showing how
the pipes have been laid
in blue color
or also shown how the
pipes take laid (in red)

Yours obediently
Nathaniel

30
11/10




59①


PLAN OF PROPOSED HOUSE
ON PLOT No. 117-C-6 MARKET QUARTER.

SCALE 8"=1"


J. Cant. L. Verley
A.M.Inst., C.E.,
Engineer.
Karachi Municipality
Kadras

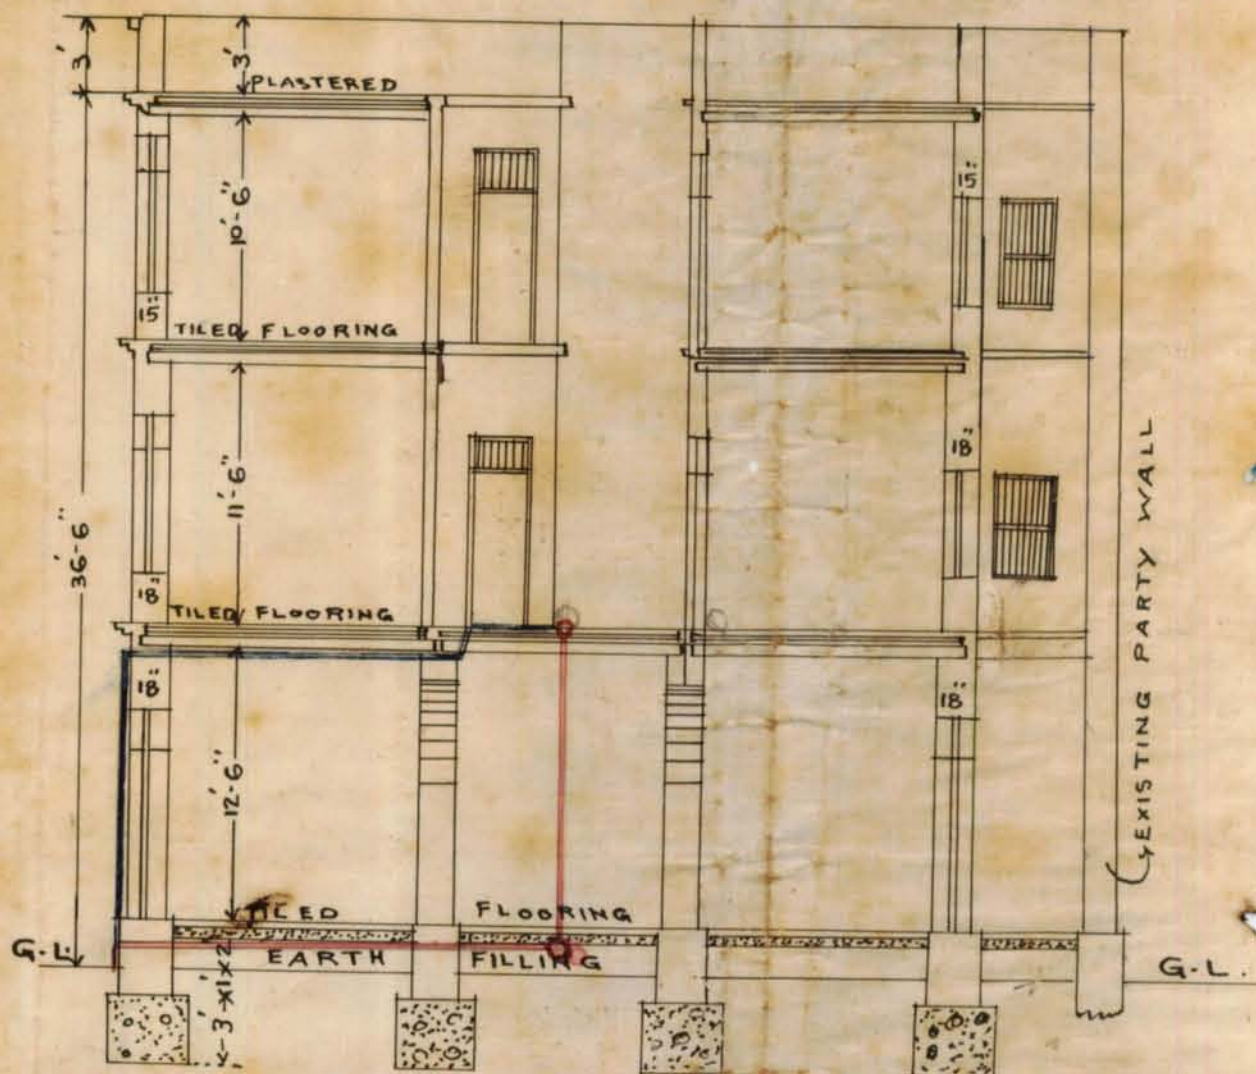

SECTION ON A-B.

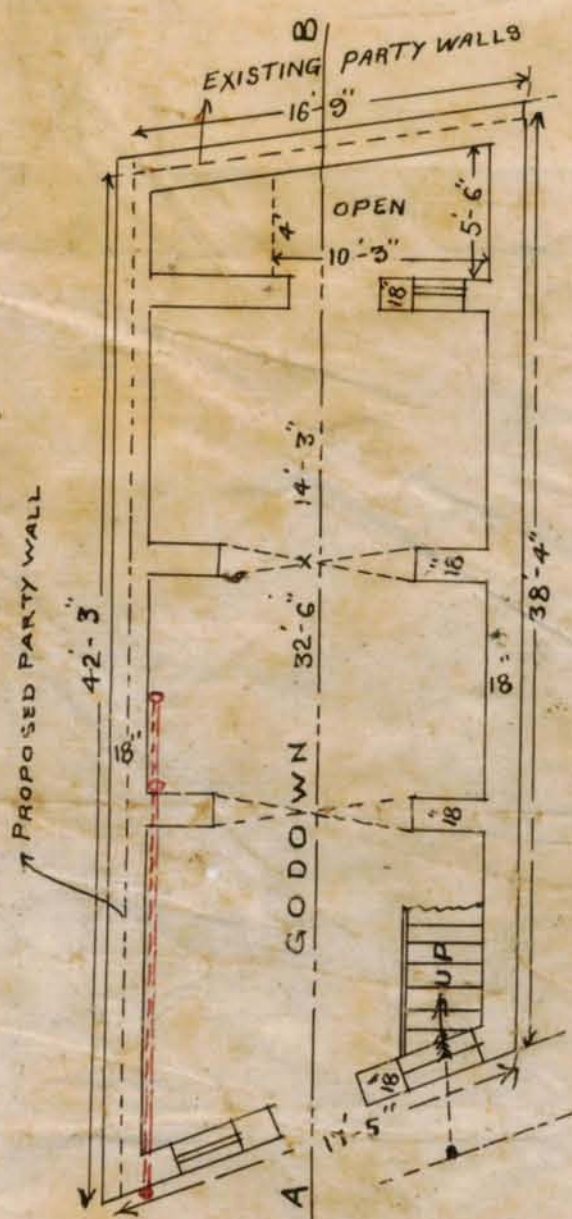

PLAN OF GROUND FLOOR.

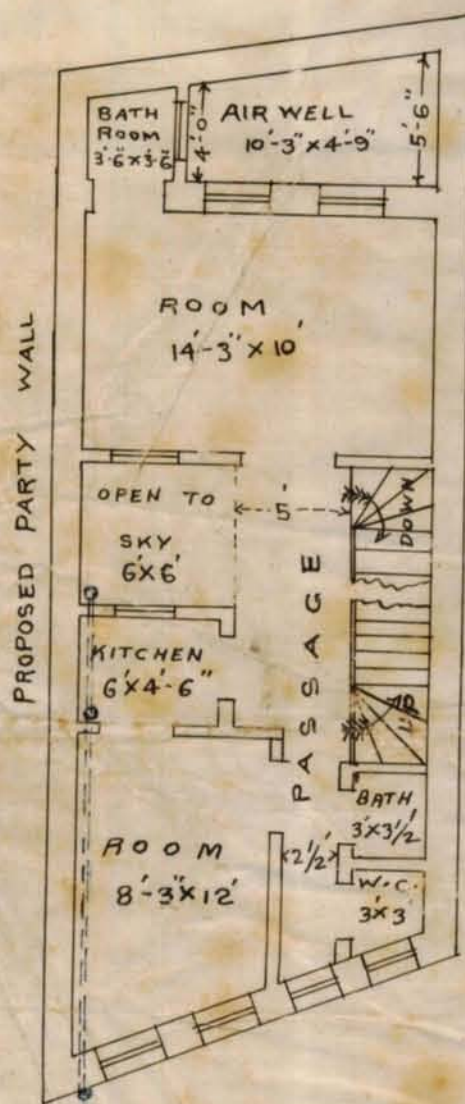

PLAN OF 1ST & 2ND FLOOR

Traced By
J. W. Datta
26-4-18



URGENT

60-1 No. E 3381 of 1918

Municipal office

Karachi 17th April 1918

MEMO /-

Messrs Yusifali Mahamedali Mulla Lookmanji, Ghulam Hussain Allibhoy Karimji president and secretary of the Faiz-Allawari are requested to keep open their premises on plot No. 117 C-6 Market Quarter on ~~saturday~~ ^{Friday} the ~~20th~~ ^{19th} instant at ~~8-30~~ ⁸⁻³⁰ A. M. as undersigned ~~ix~~ desires to inspect the same. Some of their representative is required to be present on the spot on the day and hour named.

J. G. L. Verley

A. M. Inst. C. E.,

ENGINEER

Karachi Municipality.

Drinking water telephoned
to attend

Notes
M



60.2
Sir,

With reference to this
They to report that home
has been inspected by
you this morning on
No. 1 kuteliwara lane.
Market gate.

Yours truly
Nathan

19
4 10.

61-1

URGENT

L. Surveys please send up
on plot N-117 C 6 Market Q.V.
on the pond on Saturday morning
20th inst.

3024
16/4/18

10/4/18

URGENT

Write to the owner of plot N-117 C 6
to be on the site on the 20th inst.

N. S. S.
10/4/18

~~G. hirsuta~~ ~~of~~ ~~Forest~~ ~~and~~ ~~all~~ ~~the~~ ~~above~~ ~~mentioned~~ ~~places~~ ~~in~~ ~~the~~ ~~State~~ ~~of~~ ~~California~~ ~~in~~ ~~the~~ ~~year~~ ~~1881~~

1914/2

To,

The Engineer.

Kerali Municipality

Sir,

With reference to this
I have to report that I have
taken you on the site
when you told me that
write to maining that he
should be there according
he was informed but
he could not come when
on the other day I returned
to Mr. Frankwick when
you were inspecting the
house on Moorad Rd.
he told me that he has
to go reservoir & some
other day when will see to it.

Respect your order.

Yours faithfully
Nathal

2894

18/4/18

~~but~~
Forwarded to Sup^{ty} Mr. [unclear]
for report as to the intention
of the ~~Worshiping~~ Committee plumber
that the soil pipe could not be
laid in any other manner.

Mr. [unclear] Monday morning 27/3/18
to accompany [unclear] on
Monday morning 27/3/18

3/18

M. M.

Handwritten signature in red ink.

If you did inspect the place now
 also the Sup^r & 7m deck
 with the owner to keep the place open & to be present himself
 1.18/11/15

1. 16/2/18
 This was inspected
 along with Mr. [unclear]
 this [unclear] 17.4.18

This was inspected
along with Mr. [unclear]
this [unclear] 17.4.18

63

J. W. D. Clark write the owner
to remove the bad work & have
it properly done within 7 days
Copy to the Sup^r to the acting for report.

V. 10/1/19



64

No. W/ 4498 of 1917

Superintendent of Machinery's Office,
Karachi, 13th December 1917

M E M O :-

In reference to the Engineers endorsement No. 9716 of 26th Ultimo, forwarding letter of 19th November 1917 from Plumber Dinmahomed Tarmahomed with F. C. (herewith returned) the Superintendent of Machinery has the honor to state, the soil pipes of the bath room on plot No. 117, C-6, Market Quarter, have been laid inside the house along the walls, above and not under the ground in cement concrete, which is against the Rules. The plumber should therefore be directed to state why his license should not be revoked.



M. I. M. E.

Superintendent of Machinery,
Karachi Municipality.

copy to the C.O. & C.E. The plumber Dinmahomed Tarmahomed should either have his license revoked or be heavily fined.

V. 14/12/17



65-1

~~10~~

~~10~~

~~10~~



of 1918.

65-2

municipal Office.

. 26th February 1918.

cation dated 23rd January

E 1765 dated 18/20th

informed that the shed
246, E-7 Runchore Quarter
ws. it blocks the light

[Handwritten signature]

[Faint handwritten notes]
2/1/18
222

No: W/ 346 of 1918

Superintendent of Machinery's Office

Karachi, 29th January 1918

M E M O : -

With reference to the Engineer's endorsement No: 10281 of 17th ultimo, forwarding letter from Ghulamhussein Allibhoy Karimji Honarary Secretary Faiz-E-Alavi, re laying of soil pipes of bath room inside the house on Plot No: 117, C-6, Market Quarter, the Superintendent of Machinery has the honour to state the way in which the pipes should be fitted was shown to the owner, who has so far not complied with the requirements.

M. I. M. E.

Superintendent of Machinery

Karachi Municipality.

80 for 8/c
30/11



In Orchard
attach 95 return

Nathl
1-2-18.

Sir,

They to know
whether the site you
wish to inspect so that
the information will be
given to the drawing
practically as soon as
possible. Request your
Nathl

URGENT

Shows tomorrow
morning. The drawings
mainly to the present.

V. 7/2/18

Telephoned Kavalin
works clerk by Shamsi
Winkler Sirings with
because when there C P-30 AM.
known. (K)
7 2/2/18

Sir,

They to report that this
matter pending with me
since long. It will be
convenient to appoint time
to visit the Superintendent of
works ^{they not} and get the
drawing out. Request

your order. The
have you order the
papers to be when
on round. Nathl
instructed the 25.18
mainly to the present as
ordered.

V. 24/2/18

Karachi City, 15th December 1917.

Non Secretary "FAIZ-E-ALVI"

To,

The Engineer

Karachi Municipality,

Karachi.

Dear Sir,

With reference to your No.E11085, I have to inform you that the soil pipes of bath room on Plot No.117 C-6 Market Quarter could not be laid outside as the bath room is at the back of the House. I shall thank you to let me know how can the pipes be fitted from outside.

I am Dear Sir,

Yours faithfully,

Gulam Khan Alibhango

Honorary Secretary,

Faiz-E-Alavi.

Answer masterly for
report with F.C.
Hull

KARACHI MUNICIPALITY.

[1,000—19.6-17.

Extract from the Proceedings of the Managing Committee Meeting of the
Karachi Municipality, held on the 15th January 1918.

SUBJECT—

13. Endorsement, dated 10th January 1918, by the Chief Officer and Chief Engineer, recommending for the reasons stated that the license of Plumber Dinmahomed Tarmahomed be revoked for the unexpired portion of the year ending 31st March 1918.

RESOLUTION No. 57.

Deferred

No. 426 of 1918.

Karachi, 16th January 1918.

MEMO.

True extract forwarded to the Head Clerk for disposal with J.C.

Copy for report as
to the contention of
the Plumber that
the soil pipe could not
be laid in any other
manner

for Chief Officer,
Karachi Municipality.

17/1/18
L.S. Swamy to Shaukat
on 17/1/18
w/s on 17/1/18
and 17/1/18
to the present.

69



No. W/ 4408 of 1917,

Superintendent of Machinery's office,

Karachi, 13th December 1917.

Memo:-

In reference to the Engineer's endorsement No. 9216 of 26th ultimo, forwarding letter of 19th November 1917, from Plumber Dinmahomed Tarmahomed with F.C. (herewith returned) the Superintendent of Machinery has the honour to state, the soil pipes of the bath room on plot No. 117, C-6, Market Quarter have been laid inside the house along the walls, above and not under the ground in cement concrete, which is against the rules. The plumber should therefore be directed to state why his license should not be revoked.

Sd. A. E. Markwick.

M. I. N. E.,

Superintendent of Machinery,

Karachi Municipality.

No. E/ 11068 of 1917,

Municipal Office,

Karachi, 14th December 1917.

together with the

Copy forwarded to the Chief Officer & Chief Engineer.

The plumber Dinmahomed Tarmahomed should either have his license revoked or be heavily fined.

Submitted to the M. C.

The practice of fixing soil pipes inside the house instead of outside as provided for in the By-laws is a serious offence. It is recommended that the Plumber's license be suspended for the unsupervised practice of the job ending March 31 next.

10 1/8

*By the Council**J. Cant. L. Varley*

A. M. Inst. C. E.,

Engineer,

Karachi Municipality.

~~Copy submitted to the M. C. with the recommendation that the license be revoked for the unsupervised practice of the job.~~

11/12

17/12



70

No. 11600 of 1915,
Municipal Office,
Karachi 26/28th October 1915.

Engineer

Undersigned has had cause to complain recently that soil pipes have been erected inside buildings contrary to the Byelaws.

Cases to which attention have been drawn include plots Nos. 130, A-19, 78 & 79, A-19 and 18, A-18.

Similarly on plot No. 518, E-4, on which a large Chawl of probably 50 or 60 rooms soil pipes were erected in each room contrary to the Byelaws and in addition nanny traps were provided inside living rooms contrary to all orders issued to the Drainage staff and the whole of this work has had to be altered by the Engineer and Undersigned's negotiations and notices served on the owners.

No soil pipes or vent pipes to drains (which are also soil pipes) must be permitted to be put up except on an external wall and outside the building and no nanny traps are to be permitted to be fixed in living rooms.

It is the duty of the Drainage Staff to see that Drainage work is carried out properly and the Byelaws complied with and unless the present staff can see this is done they will be replaced by others and they should be so informed.

Sd: *McCarthy*

A. M. Inst. C. E.,

Chief Officer & Chief Engineer,
Karachi Municipality.



K A R A C H I.

Monday 19th November 1917.

To,

The Chief Officer & Chief Engineer,

Karachi Municipality,

K a r a c h i.

Dear Sir,

In reply to your letter ~~of~~ no:3864 and subsequent reference no:13122 dated 5th inst, I beg to state most respectfully that as the Bath Room in question is situated at the back of the house, the pipe could not by any means be laid outside the ~~XXX~~ Building. The only way was to lay pipe through the go-down in order to avoid they being laid through the dwelling rooms.

Begging to be excused for the delay in replying your letter,

I beg to remain, Dear Sir,

Your most obedient servant,

with me in a hurry, on my way
i.e Dinmahommed Tarmahommed,

Licensed Plumber.

97/6
Drainage Masters
for attention and report.

attach ge
Hall En

7.2 attached
Yours obedt
23/11/17 *Tarmahommed*

Engineering
23/11

72

URGENT

No. 13122

5th November 1917.

6

In continuation of this Office No.W. 3864 dated 16th ultimo, Plumber Dinmahomed Farnahomed is directed to submit his explanation immediately why he should not be fined for doing work against the Rules and his license be revoked.



A. M. Inst. C. E.,

Ag: Chief Officer & Chief Engineer
Karachi Municipality.

00000000000000000000


REFERENCE No. G.13123 of 1917.

Municipal Office,

Karachi, 5th November 1917.

6

Copy forwarded to the Engineer for information.



A. M. Inst. C. E.,

Ag: Chief Officer & Chief Engineer
Karachi Municipality.

2.

M

NO 17185



73-1

No. W. 3864 of 1917

Superintendent of Machinery's Office

Karachi, 16th October 1917

M E M O.

Licensed Plumber Dinmahomed Tarmahomed is informed that he has laid soil pipes of the ^{bathtub} ~~leath~~ room on plot No. 117, C-6, Market Quarter inside the house which is against the Rules. He is directed to explain why he should not be fined for doing work against the Rules, and his license be revoked.

The pipes must be removed and be refitted properly from outside.

M. I. M. E.

Superintendent of Machinery,
Karachi Municipality.

No. W 3866 of 1917

Superintendent of Machinery's Office,

Karachi, 16th October 1917

Copy forwarded to Ameer Maistry for report
after 5 days.

M. I. M. E.

Superintendent of Machinery,
Karachi Municipality

NO 17135



73-2

Sir,

I beg to report that
plumber Sinnaboum
Sinnaboum has not replied
as yet. His license he
revoked.

Yours Alas
3/11/17
Sinnaboum

Forwarded to the
Inspector for removal
of disposal. The
plumber should be
punished in some way
for breaking the rules
of the municipality.
3/11/17

8078
3.11.17

9075
5.11.17
Submitted with
copy to Co. Sec. for
forwarding.

[Signature]

O.P. To send reminder calling
for immediate explanation

ml
5/4

NO 17132

17-66




MARKET QUARTER

74 (2)

SHEET N^o C-6

SCALE 40'=1"

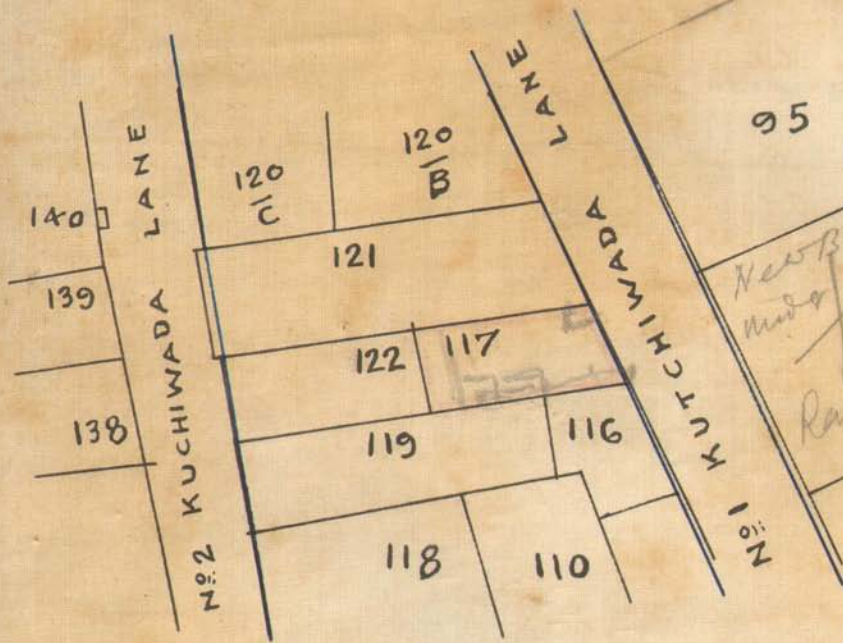



75-1

No.E/

11065

of 1917,

Municipal Office,

Karachi, 14th December 1917.

Memo:-

It has been observed that the plumber Dinmahomed Tarmahomed has laid soil pipes of the bath room on plot No. 117, C-6, Market Quarter inside the house which is against the rules, Messrs Yusufali Mahomedally Moola Lookmanji & others. President of the Faiz Hussain Fund (per Goolam Husen ~~XIII~~ Allibhoy) are therefore requested to have the pipes removed and refitted properly from outside within 7 days from the receipt hereof, failing which the work will be carried out at their risk and cost

(Sd) J. C. E. E. Farley

A.M.Inst.C.E.,

Engineer,

Karachi Municipality.

No. E/

11066

of 1917,

Municipal Office,

Karachi, 14th December 1917.

Copy forwarded to the Land Surveyor to shew Undersigned
 fax on ground.

15/12

attach H.C.
 12/1/18

J. C. E. E. Farley

A.M.Inst.C.E.,

Engineer,

Karachi Municipality.

to move has please
 attach H.C. & request
 the Superintendent of
 Machinery to direct his
 Ministry with reference to the
 drainage connection of plot
 no 117. Ch. for work of

21/12 Nakhil

No.E/

11065

of 1917,

76

Municipal Office,

Karachi, 14th December 1917.

Memo:-

It has been observed that the plumber Dinmahomed Tarnahomed has laid soil pipes of the bath room on plot No.117, C-6, Market Quarter inside the house which is against the rules, Messrs Yusfali Mahomedally Moola Lookmanji & others, President of the Faiz Hussain Fund (per Coolam Husen ~~X~~ Allibhoy) are therefore requested to have the pipes removed and refitted properly from outside within 7 days from the receipt hereof, failing which the work will be carried out at their risk and cost.

A.M.Inst.C.E.,

Engineer,

Karachi Municipality.

No. E/

11066

of 1917,

Municipal Office,

Karachi, 14th December 1917.

Copy forwarded to the Land Surveyor to shew Undersigned
~~xxx~~ on ground.

A.M.Inst.C.E.,

Engineer,

Karachi Municipality.

Copy to,

Suptd of Machinery for report after 7 days.

11067

No. *W* 4498 of 1917,Superintendent of Machinery's office,
Karachi, 13th December 1917.Memo:-

In reference to the Engineer's endorsement No. 9716 of 26th ultimo, forwarding letter of 19th November 1917, from Plumber Dinmahomed Tarmahomed with F.C. (herewith returned) the Superintendent of Machinery has the honour to state, the soil pipes of the bath room on plot No. 117, C-6, Market Quarter have been laid inside the house along the walls, above and not under the ground in cement concrete, which is against the rules. The plumber should therefore be directed to state why his license should not be revoked.

Sd. A. E. Markwick.

M. I. M. E.,

Superintendent of Machinery,
Karachi Municipality.

No. E/ 11068 of 1917,

Municipal Office,

Karachi. 14th December 1917.

together with the

Copy forwarded to the Chief Officer & Chief Engineer.

The plumber Dinmahomed Tarmahomed should either have his license revoked or be heavily fined.

A. M. Inst. C. E.,
Engineer,
Karachi Municipality.



78


No. L.S. 108 of 1919.

Municipal office,

Karachi 8th January 1919.

MEMO,

The Superintendent of Machinery is requested to report in connection with the correspondence of Mr. Ghulam Husain Allibhoy Karimji Honorary Secretary Faiz-E-Alvi plot No. 117 C-6 Market Quarter and whether he kept an engagement with the owner explained him on site what was to be done.


A. M. Inst. C. E.,

Engineer,

Karachi Municipality.

M. 82



Heritage

79 KMR.CDD.MaQ.1917-1919.01