




Preface

Since 1991, ADEZZ has manufactured planters, outdoor fireplaces and water features in its own manufacturing plant. In order to meet your customers needs best, we offer customised products, RAL-colours and a range of accessories including wheels for practically all our products. We specialise in manufacturing high-quality planters at a very competitive price. These sustainable Dutch quality products will certainly add value to your landscape design.

5 ADEZZ principles:

- Free delivery
- Buy on account, pay after delivery
 - 5 year warranty
 - · Lowest price guarantee
- All standard products in stock, delivered within 1 week



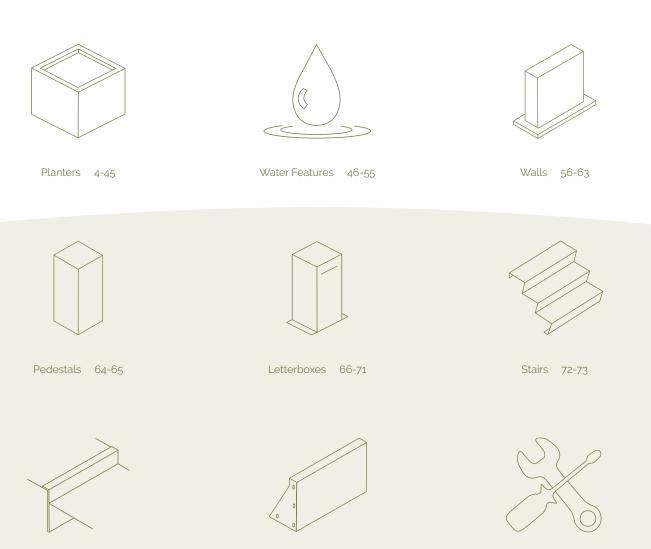

Retaining Walls 78-81

Accessories 82-83

Edging 74-77



The standard material thickness of our Corten Steel planters is 2mm, although they can also be produced in 3-4 and 5mm. Corten Steel, also known as weather resistant steel, is a very strong steel alloy. As soon as Corten Steel is exposed to the elements it will naturally weather and develop a protective layer of rust. This natural fixed coating of rust provides protection against further corrosion. Characteristic of Corten Steel is the brown-orange rust colour and its longevity. Our Corten Steel products are delivered in an un-rusted state and the weathering process will take about 4-5 months to complete. Corten Steel planters are not recommended to be used in combination with overflow pipes.

As standard, these planters are equipped with 15mm high feet.

5 year warranty








Wheels 450 KG

Corten Varnish Rust accelerator



Andes (CA)

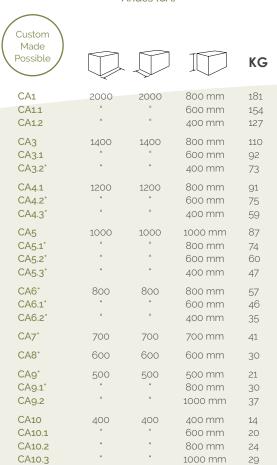

* Wheels possible



Andes (CA)

Custom Made Possible				KG
CA20.1 CA20.2* CA22 CA22.1* CA22.2* CA22.3*	2000 " 2000 1500 1200 900	1000	600 mm 400 mm 600 mm	100 80 72 55 46 38
CA23.1* CA23.2* CA23.3*	2000 1500 1200 1000	500	500 mm " "	40 35 40 35
CA24 CA24.1 CA24.2 CA24.3 CA24.4	2000 1500 1200 1000 800	400	800 mm " "	80 63 52 46 39
CA25 CA25.1 CA25.2 CA25.3 CA25.4	2000 1500 1200 1000 800	400	400 mm	49 38 31 26 23
CA26.2	900	300	800 mm	38





The standard material thickness of our Corten Steel planters is 2mm, although they can also be produced in 3-4 and 5mm. Corten Steel, also known as weather resistant steel, is a very strong steel alloy. As soon as Corten Steel is exposed to the elements it will naturally weather and develop a protective layer of rust. This natural fixed coating of rust provides protection against further corrosion. Characteristic of Corten Steel is the brown-orange rust colour and its longevity. Our Corten Steel products are delivered in an un-rusted state and the weathering process will take about 4-5 months to complete. Corten Steel planters are not recommended to be used in combination with overflow pipes.

The model 'Andes' is also available with 90mm legs.

5 year warranty





Corten Varnish Ru

Rust accelerator





Andes (CAP) feet 90mm

Andes (CAP) feet 90mm

Custom Made Possible				KG
CAP3	1400	1400	800 mm	106
CAP4.1 CAP4.2	1200	1200	800 mm 600 mm	88 74
CAP5.1 CAP5.2	1000	1000	800 mm 600 mm	71 58
CAP6 CAP6.1	800	800	800 mm 600 mm	55 45
CAP7	700	700	700 mm	43
CAP8	600	600	600 mm	29
CAP22 CAP22.1 CAP22.2	2000 1500 1200	500	600 mm	66 53 44
CAP24.2 CAP24.3	1200 1000	400	800 mm	53 46



The standard material thickness of our Corten Steel planters is 2mm, although they can also be produced in 3-4 and 5mm. Corten Steel, also known as weather resistant steel, is a very strong steel alloy. As soon as Corten Steel is exposed to the elements it will naturally weather and develop a protective layer of rust. This natural fixed coating of rust provides protection against further corrosion. Characteristic of Corten Steel is the brown-orange rust colour and its longevity. Our Corten Steel products are delivered in an un-rusted state and the weathering process will take about 4-5 months to complete. Corten Steel planters are not recommended to be used in combination with overflow pipes.

As standard, these planters are equipped with 15mm high feet.

5 year warranty







Wheels 450 KG Corten Varnish







Atlas (CT)

Custom Made Possible	Ø		KG
CT1	2000	800 mm	135
CT1.1		600 mm	117
CT1.2		400 mm	99
CT2	1500	800 mm	91
CT2.1		600 mm	77
CT2.2*		400 mm	64
CT4.1*	1200	800 mm	68
CT4.2*		600 mm	57
CT4.3*		400 mm	47
CT5.1*	1000	800 mm	54
CT5.2*		600 mm	51
CT5.3*		400 mm	41
CT6.1*	800	800 mm	42
CT6.2*		600 mm	34
CT6.3*		400 mm	27
CT8	600	600 mm	24
CT8.1		800 mm	29
CT8.2		1000 mm	35
CT8.3		1200 mm	41

* Wheels possible

Cado (CC)

Custom Made Possible	Ø		KC
CC4	1200	1000 mm	70
CC4.1*	"	800 mm	61
CC4.2*		600 mm	51
CC5	1000	1000 mm	56
CC5.1*		800 mm	48
CC5.2*	"	600 mm	40
CC6	800	1000 mm	43
CC6.1	и	800 mm	36
CC6.2	"	600 mm	30
CC8	600	800 mm	26
CC8.1	и	600 mm	20



The standard material thickness of our Corten Steel planters is 2mm, although they can also be produced in 3-4 and 5mm. Corten Steel, also known as weather resistant steel, is a very strong steel alloy. As soon as Corten Steel is exposed to the elements it will naturally weather and develop a protective layer of rust. This natural fixed coating of rust provides protection against further corrosion. Characteristic of Corten Steel is the brown-orange rust colour and its longevity. Our Corten Steel products are delivered in an un-rusted state and the weathering process will take about 4-5 months to complete. Corten Steel planters are not recommended to be used in combination with overflow pipes.

As standard, these planters are equipped with 15mm high feet.

5 year warranty





Corten Varnish Rust accelerate








Ellipse (CEL) Ellipse (CEL)

Custom Made Possible				KG
CEL1 CEL2	2800	1600	600 mm 400 mm	205 165
CEL3 CEL4	2000	1200	600 mm 400 mm	135 106
CEL5 CEL6	1200	800	600 mm 400 mm	71 54





Galvanised Steel

Hot-dip galvanisation is a production process of galvanising. This process involves providing the metal with a layer of zinc by immersing the product in a bath of molten zinc of about 460° Celsius. The usually dull grey material protects the metal from corrosion caused by weather influences.

5 year warranty



Overflow pipe










Custom Made Possible

VS3

VS4.1

VS5.1 VS6 VS8



Vadim (VS)

KG

1400	1400	800 mm	213
1200	1200		176
1000	1000	"	138
800	800	"	108
600	600	600 mm	57









KG

97

65

VSA1 VSA2 1000/700

1000 mm 800 mm

800/600



Vadim (VS)

VS22	2000	500	600 mm	130
VS22.1	1500	44	"	105
VS22.2	1200	44		88



These planters are made of 3mm thick aluminum as standard, although they can also be produced in 4-5mm. Aluminum is light, strong, durable and resistant to corrosion. The top edge of all planters is reversed twice, which gives them a strong and timeless appearance. All Aluminum planters are equipped with 15mm high feet, so the planter is raised slightly off the ground. Once constructed the planters are powder coated with a strong adhesive primer and finished with a coloured coating.

Standard colours are RAL 7021 | 7035 | 9016. Almost all other RAL colours are possible (beware of start-up costs)

5 year warranty



Cleaner and protector







Descaling Wheels 450 KG

Overflow pipe







Florida (AF)

Custom Made Possible				KG
AF1.1 AF1.2	2000	2000	600 mm	82 68
AF3.1 AF3.2*	1400	1400	400 mm 800 mm 600 mm 400 mm	60 50 39
AF4.1 AF4.2* AF4.3*	1200	1200	800 mm 600 mm 400 mm	48 39 30
AF5.1* AF5.2* AF5.3*	1000 "	1000	1000 mm 800 mm 600 mm 400 mm	46 39 31 23
AF6* AF6.1* AF6.2*	800	800	800 mm 600 mm 400 mm	30 24 18
AF7*	700	700	700 mm	21
AF8*	600	600	600 mm	16
AF9* AF9.1* AF9.2	500	500	500 mm 800 mm 1000 mm	11 16 19
AF10 AF10.1 AF10.2 AF10.3	400	400	400 mm 600 mm 800 mm 1000 mm	7 10 12 15

^{*} Wheels possible



Florida (AF)

Custom Made Possible				KG
AF20.1 AF20.2* AF22 AF22.1* AF22.2* AF22.3*	2000 2000 1500 1200 900	1000	600 mm 400 mm 600 mm	51 41 37 28 24 20
AF23* AF23.1* AF23.2* AF23.3*	2000 1500 1200 1000	500	500 mm	32 25 21 18
AF24 AF24.1 AF24.2 AF24.3 AF24.4	2000 1500 1200 1000 800	400	800 mm " "	41 32 27 24 20
AF25.1 AF25.2 AF25.3	2000 1500 1200 1000	400	400 mm "	25 19 16 14
AF26.2	900	300	800 mm	20



These planters are made of 3mm thick aluminum as standard, although they can also be produced in 4-5mm. Aluminum is light, strong, durable and resistant to corrosion. The top edge of all planters is reversed twice, which gives them a strong and timeless appearance.

Once constructed the planters are powder coated with a strong adhesive primer and finished with a coloured coating.

Standard colours are RAL 7021 | 7035 | 9016. Almost all other RAL colours are possible (beware of start-up costs)

5 year warranty



Cleaner and protector





Descaling Overflow pipe

verflow pipe






Florida (AFP) Feet 90mm

Florida (AFP) Feet 90mm



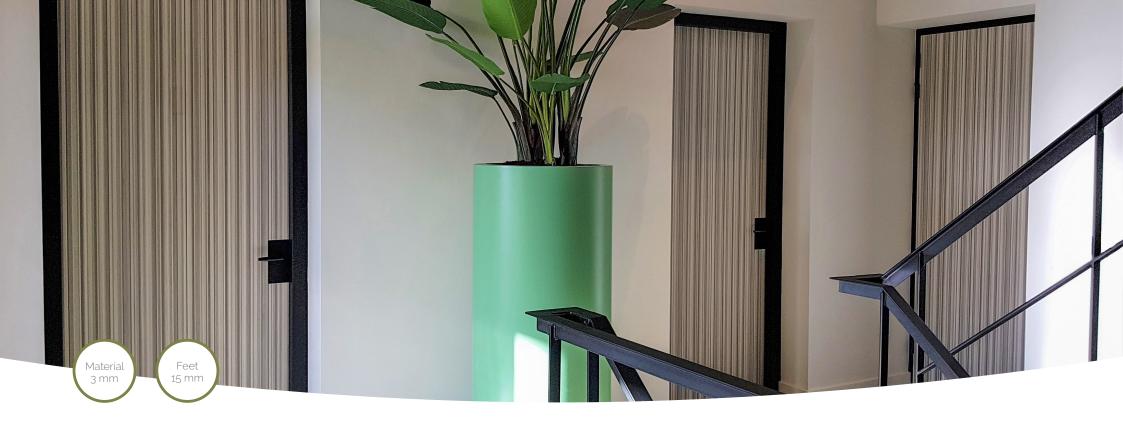

These planters are made of 3mm thick aluminum as standard, although they can also be produced in 4-5mm. Aluminum is light, strong, durable and resistant to corrosion. The top edge of all planters is reversed twice, which gives them a strong and timeless appearance. All Aluminum planters are equipped with 15mm high feet, so the planter is raised slightly off the ground. Once constructed the planters are powder coated with a strong adhesive primer and finished with a coloured coating.

Standard colours are RAL 7021 | 7035 | 9016. Almost all other RAL colours are possible (beware of start-up costs)

5 year warranty









Cleaner and protector Descaling Wheels 450 KG







Sydney (AM)

Custom			
Made Possible	Ø		KC
AM1.1 AM1.2	2000	600 mm 400 mm	62 53
AM2.1 AM2.3*	1500	800 mm 600 mm 400 mm	48 41 34
AM4.1* AM4.2* AM4.3*	1200	800 mm 600 mm 400 mm	35 29 24
AM5.1* AM5.2* AM5.3*	1000	800 mm 600 mm 400 mm	28 23 19
AM6.1* AM6.2* AM6.3*	800 "	800 mm 600 mm 400 mm	22 17 14
AM8.1 AM8.2 AM8.3	600 "	600 mm 800 mm 1000 mm 1200 mm	12 15 18 21

^{*} Wheels possible

Cairo (AC)

Custom Made Possible	ø		KG
AC4.1* AC4.2*	1200	1000 mm 800 mm 600 mm	45 39 33
AC5.1* AC5.2*	1000	1000 mm 800 mm 600 mm	36 31 26
AC6.1 AC6.2	800	1000 mm 800 mm 600 mm	27 23 19
AC8 AC8.1	600	800 mm 600 mm	16 13



These planters are made of 3mm thick aluminum as standard, although they can also be produced in 4-5mm. Aluminum is light, strong, durable and resistant to corrosion. The top edge of all planters is reversed twice, which gives them a strong and timeless appearance. All Aluminum planters are equipped with 15mm high feet, so the planter is raised slightly off the ground. Once constructed the planters are powder coated with a strong adhesive primer and finished with a coloured coating.

Standard colours are RAL 7021 | 7035 | 9016. Almost all other RAL colours are possible (beware of start-up costs)

5 year warranty







Cleaner and protector Descaling Overflow

Overflow pipe








Ellipse (AEL) Ellipse (AEL)

Custom Made Possible				KG
AEL1 AEL2	2800	1600	600 mm 400 mm	91 75
AEL3 AEL4	2000	1200	600 mm 400 mm	59 47
AEL5 AEL6	1200	800	600 mm 400 mm	32 25





Plant frames

By GROENR

We have developed these Plant Frames to accentuate your border, protect your plants and realise clean lines in your garden. Because of the open structure of the frame it does not dominate and gives peace to the defined flowerbed. Lush planting is given a framework and will be better reflected.

Available in Corten steel (3mm) and Aluminum (4mm).

Standard colours for Aluminum are RAL 7021 | 7035 | 9016. Almost all other RAL colours are possible (beware of start-up costs)









Cleaner and protector Descaling Corten Varnish



Plant Frame (APF8)



Plant Frame (CPF8)





Plant Frame (APF4)



Plant Frame (CPF4)

Custom Made Possible				KC
APF1	2000	2000	400 mm	14
APF2	1400	1400	44	10
APF3	1200	1200	44	8
APF4	1000	1000	44	7
APF5	800	800	"	6
APF6	600	600	"	5
APF7	1200	"		7
APF8	1000	"		6

Custom Made Possible				KG
CPF1	2000	2000	400 mm	30
CPF2	1400	1400	"	22
CPF3	1200	1200	"	19
CPF4	1000	1000	ii .	16
CPF5	800	800	ii .	13
CPF6	600	600	ii .	10
CPF7	1200	"	"	15
CPF8	1000	"	"	13



Hardwood

These high quality planters are made from tropical hardwood that is legally harvested. This ensures that they are environmentally sustainable and they provide a warm and natural appearance. We only use hardwood with durability class 2. Due to the high durability of the wood no further treatment is required. If the planters are not treated they will gradually age, which has no influence on the quality of the planters. They are constructed using stainless steel fasteners, the inside is wrapped with EPDM and the bottom with anti-root fabric.

5 year warranty





Valencia (HR)



Valencia (HR)

				KG
HR4 HR4.2	1200	1200	950 mm 600 mm	109 71
HR5 HR5.2	1000	1000	950 mm 600 mm	87 56
HR6 HR6.1	800	800	800 mm 600 mm	52 39
HR7	700	700	700 mm	37
HR8	600	600	600 mm	29
HR22 HR22.1 HR22.2	2000 1500 1200	500	600 mm	65 48 38
HR24.2 HR24.3	1200 1000	400	800 mm	43 37



Hardwood

These high quality planters are made from tropical hardwood that is legally harvested. This ensures that they are environmentally sustainable and they provide a warm and natural appearance. We only use hardwood with durability class 2. Due to the high durability of the wood no further treatment is required. If the planters are not treated they will gradually age, which has no influence on the quality of the planters. They are constructed using stainless steel fasteners, the inside is wrapped with EPDM and the bottom with anti-root fabric. We offer our Sevilla model in bespoke dimensions.

5 year warranty



Wheels 450 KG



Sevilla (HS)

Custom Made Possible				KG
HS ₃	1400	1400	740 mm	115
HS4.1 HS4.2 HS4.3	1200	1200	740 mm 620 mm 380 mm	96 84 60
HS5.1* HS5.2* HS5.3	1000	1000	740 mm 620 mm 380 mm	80 70 49
HS6* HS6.1* HS6.2	800	800	740 mm 620 mm 380 mm	62 54 37
HS8*	600	600	620 mm	43
HS10	400	400	380 mm	20
HS22* HS22.1* HS22.2*	2000 1500 1200	500	620 mm	83 67 59
HS24 HS24.1 HS24.2 HS24.3	2000 1500 1200 1000	400	740 mm	90 73 64 57
HS25 HS25.1 HS25.2 HS25.3	2000 1500 1200 1000	400	380 mm	54 43 38 33

^{*} Wheels possible



Sevilla Taps (HO)

Custom Made Possible				KG
HO5*	700	700	980 mm	57
HO6*	600	600	860 mm	42
H07*	550	550	740 mm	33
H08*	500	500	620 mm	25





Hardwood

These high quality planters are made from tropical hardwood that is legally harvested. This ensures that they are environmentally sustainable and they provide a warm and natural appearance. We only use hardwood with durability class 2. Due to the high durability of the wood no further treatment is required. If the planters are not treated they will gradually age, which has no influence on the quality of the planters. They are constructed using stainless steel fasteners, the inside is wrapped with EPDM and the bottom with anti-root fabric.

5 year warranty



Wheels 450 KG





Malaga Rhombus (HRS)

Malaga Rhombus (HRS)

Custom Made Possible				KG
HRS4.1* HRS5.1* HRS6* HRS8*	1200 1000 800 600	1200 1000 800 600	770 mm " 650 mm	93 74 56 34
HRS22* HRS22.1* HRS22.2*	2000 1500 1200	500	650 mm	75 64 49

^{*} Wheels possible



Fibreglass

Our fibreglass planters are manufactured in high-quality reinforced fibreglass, with additional reinforcement in the corners. The standard colour used is black/grey RAL 7021. Also available in RAL colours: 7006 | 7016 | 7035 | 9005 | 9010 | 9016 (surcharge 10%). The quality of all our fibreglass planters is enhanced by the colouring, which runs through the entire material. The upper edge has been reversed twice, which gives this planter a splendid timeless appearance. We recommend that the planter should be cleaned at least twice a year. Please note that some cleaners may damage or affect the material. The best product for cleaning and maintaining fibreglass is the "Cleaner and protector set" that we offer on the accessories page. Do not clean with steel wool, sand paper, solvents or any other abrasive materials, cleaning with a pressure washer can also cause damage.

5 year warranty







Cleaner and protector Overflow pipe

Wheels 450 KG





Buxus (PB)



				KG
PB1.1 PB1.2	2000	2000	600 mm 400 mm	49 40
PB2.1	1600	1600	600 mm	49
PB3.1 PB3.2	1400	1400	600 mm 400 mm	30 24
PB4.1 PB4.2 PB4.3	1200 "	1200	1000 mm 800 mm 600 mm 400 mm	34 29 24 19
PB5 PB5.1 PB5.2 PB5.3	1000	1000	1000 mm 800 mm 600 mm 400 mm	27 23 19 15
PB6* PB6.1* PB6.2*	800	800	800 mm 600 mm 400 mm	18 14 11
PB7*	700	700	700 mm	14
PB8*	600	600	600 mm	10
PB9* PB9.1* PB9.2*	500	500	500 mm 800 mm 1000 mm	7 10 12
PB10.1 PB10.2 PB10.3	400	400	400 mm 600 mm 800 mm 1000 mm	4 6 8 9
DD40.4	"		4000 100100	4.4

1200 mm 11

				KG
PB20.1 PB20.2	2000	1000	600 mm 400 mm	31 25
PB21	2300	500	400 mm	19
PB22* PB22.1* PB22.2* PB22.3*	2000 1500 1200 900	500	600 mm	22 17 14 11
PB23 [*] PB23.1 [*] PB23.2 [*] PB23.3 [*]	2000 1500 1200 1000	500	500 mm	19 15 13 11
PB24.1 PB24.2 PB24.3 PB24.4	2000 1500 1200 1000 800	400	800 mm " "	25 19 16 14 12
PB25 PB25.1 PB25.2 PB25.3 PB25.4 PB25.5 PB28 PB28.2	2000 1500 1200 1000 800 600 1500 900	400	400 mm " " " " 800 mm	15 12 10 8 7 5 18

PB10.4 " "

^{*} Wheels possible



Fibreglass

Our fibreglass planters are manufactured in high-quality reinforced fibreglass, with additional reinforcement in the corners. The standard colour used is black/grey RAL 7021. Also available in RAL colours: 7006 | 7016 | 7035 | 9005 | 9010 | 9016 (surcharge 10%). The quality of all our fibreglass planters is enhanced by the colouring, which runs through the entire material. The upper edge has been reversed twice, which gives this planter a splendid timeless appearance. We recommend that the planter should be cleaned at least twice a year. Please note that some cleaners may damage or affect the material. The best product for cleaning and maintaining fibreglass is the "Cleaner and protector set" that we offer on the accessories page. Do not clean with steel wool, sand paper, solvents or any other abrasive materials, cleaning with a pressure washer can also cause damage.

5 year warranty





Cleaner and protector Overflow pipe

		Ø		KG
Acer (PE)	PE1.1	1500	800 mm	20
	PE1	1200	800 mm	13
	PE2	950	700 mm	9
	PE3	890	1000 mm	11
	PE4	630	520 mm	5
	PE5	550	760 mm	5
Canna (PC)	PC1 PC2 PC3 PC4	500 " 720 800	590 mm 900 mm 840 mm	4 6 8 11
	PC5	1000	950 mm	12
	PC6	700	1120 mm	11
Ceder (PD)	PD1	2000	400 mm	17
	PD2	1530	340 mm	12
	PD3	1200	400 mm	9
Bellis (PJ)	PJ1 PJ2 PJ3 PJ4	1500 1200 1000 800	600 mm " "	25 19 15 11
Malva (PM)	PM1	1200	200 mm	7
	PM2	2000	400 mm	18





ORGAN Fibreglass

Fantastic beautiful organic, natural forms that stand out both solitary or as in a group. Planters that are no longer subordinate to the planting but are an important part of the entire composition.

The top edge is reversed twice and follows the contours of the planters.

Standard produced in black/grey RAL 7021, (high gloss RAL 9016). Other available RAL colours: 7006 | 7016 | 7035 | 9005 | 9010 | 9016 (10% surcharge).

 $These \ planters \ are \ made \ of \ high \ quality \ Fibreglass \ which \ is \ coloured \ throughout \ the \ entire \ material.$

We advise to clean and maintain the planters twice a year. Therefor we have a professional cleaning and care product available: "Cleaner and protector set".

5 year warranty





Cleaner and protector Overf

Overflow pipe










Organ (PO/POH)




PO1 POH1*

1610

26 26

* High gloss

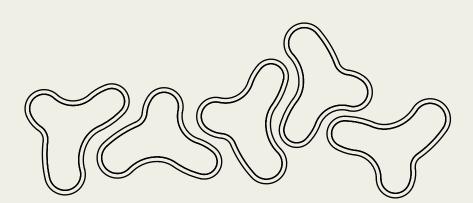



SHAPE Fibreglass

Fantastic beautiful organic, natural forms that stand out both solitary or as in a group. Planters that are no longer subordinate to the planting but are an important part of the entire composition.

The top edge is reversed twice and follows the contours of the planters.

Standard produced in black/grey RAL 7021, (high gloss RAL 9016). Other available RAL colours: 7006 | 7016 | 7035 | 9005 | 9010 | 9016 (10% surcharge). These planters are made of high quality Fibreglass which is coloured throughout the entire material.

We advise to clean and maintain the planters twice a year. Therefor we have a professional cleaning and care product available: "Cleaner and protector set".

5 year warranty





Cleaner and protector

Overflow pipe









Shape (PS/PSH)




PS1 PSH1*

1300

1260

600 mm 21 21

* High gloss

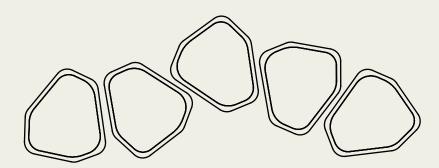



ELLIPSE Fibreglass

A beautiful sleek fibreglass planter in an oval shape. This oval shape is applicable everywhere and has a surprisingly beautiful appearance from every angle. The upper edge is reversed twice and accentuates this beautiful sleek shape.

Standard produced in black/grey RAL 7021, (high gloss RAL 9016). Other available RAL colours: 7006 | 7016 | 7035 | 9005 | 9010 | 9016 (10% surcharge). These planters are made from high-quality fibreglass, which runs through the entire material.

We advise to clean the planters at least twice a year. Therefor we have a professional cleaning and care product available: "Cleaner and protector set".

5 year warranty





Cleaner and protector Overflow pipe








Ellipse (PEL1)

Ellipse (PEL2)

				KG
PEL1 PELH1*	2000	1200	600 mm	34 34
PEL2 PELH2*	1150	800	и	20 20

^{*} High gloss





Fibreglass glossy

Our fibreglass planters are manufactured in high-quality reinforced fibreglass, with additional reinforcement in the corners. The standard colour used RAL go16. Also available in RAL colours: 7021 | 7006 | 7016 | 7035 | 9005 | 9010 (surcharge 10%). The quality of all our fiberglass planters is enhanced by the colouring, which runs through the entire material. The upper edge has been reversed twice, which gives this planter a splendid timeless appearance. We recommend that the planter is cleaned at least twice a year. Please note that some cleaners may damage or affect the material, The best product for cleaning and maintaining fibrglass is the "Cleaner and protector set" that we offer on the accessories page. Do not clean with steel wool, sand paper, solvents or any other abrasive materials, cleaning with a pressure washer can also cause damage.

5 year warranty



Cleaner and protector





Overflow pipe

pipe Wheels 450 KG





Buxus (PBH)

(PBH) Canna (PCH)

PCH1 PCH2 PCH3 PCH4 PCH6

				KG
PBH5.1 PBH5.2	1000	1000	800 mm 600 mm	23 19
PBH6* PBH6.1*	800	800	800 mm 600 mm	18 16
PBH7*	700	700	700 mm	14
PBH8*	600	600	600 mm	10
PBH9*	500	500	500 mm	7
PBH10.1 PBH10.2 PBH10.3 PBH10.4	400	400	400 mm 600 mm 800 mm 1000 mm	4 6 8 9 11
PBH22.1* PBH22.2*	1500 1200	500	600 mm	17 14
PBH25.3	1000	400	400 mm	8
PBH28.2	900	250	800 mm	11

Wheels p	oossible
----------	----------

Ø		KG
500	590 mm	4
"	900 mm	6
720	840 mm	8
800	1000 mm	11
700	1120 mm	11



Gardening at height

We have developed this product for the easy growing and harvesting of flowers, herbs and plants. A fibreglass planter with a height of 200mm is placed on a solid base made from 12 mm solid round steel, powder coated in DB703. The 3mm thick Fibreglass planter is available in the standard RAL 7021. Also available in RAL colours: 7006 | 7016 | 7035 | 9005 | 9010 | 9016 (surcharge 10%).

5 year warranty





Cleaner and protector Overflow pipe









Brett (PR2)



Brett (PR3)



Brett (PR4)



			KG
1500	1000	200/910 mm	49
44	500	4	35
1000	1000	"	40
"	500	44	20

PR1 PR2 PR3 PR4



Polymer Concrete

Polymer Concrete is a moulded stone composite, which is ideal for use in public spaces. The material is highly compressed, making it extremely strong. The composite is made out of natural minerals mixed with binding agents, which are becoming increasingly recyclable. The planters are not submitted to wear and tear. They are 100% watertight and are therefore extremely frost resistant. The closed structure of the material means that it does not hold dirt and will naturally clean from rainwater.

Advantages:

- · Very high compressive strength and bending-resistance, many times higher than fibre reinforced concrete
- 100% watertight and therefore frost-proof
- · Durable material, not submitted to wear and tear
- Natural mineral such as quartz, basalt and granite mixed with synthetic resin
- Compact structure, which prevents dirt from attaching; a proper downpour will clean the product
- 5 year warranty



Banco (BT)

				KG
BT5.1	1000	1000	800 mm	250
BT6 BT6.1	800	800	" 600 mm	172 139
BT8	600	600	44	103



Besso (BS)



Besso (BS₃)



KG

BS1 400 mm 2000 269 BS₂ 1500 125 BS4 1800 450 mm 237 2350 500 BS₅ 600 mm



* With seat





Picasso (BP)



Barro (BR)



Bodil (BD) with 60mm leg

BP1	1000	600 mm	120
BP2	600	900 mm	70

BR1	1200	900 mm	231
BR2	1500	1200 mm	408

BD1	1800	400 mm	378
BD2	2350	**	624



Water Features

Our water features are sure to create an oasis in your garden. The variety of designs and shapes is enormous. Round, square and rectangular shapes are possible. Many of the models can be ordered with a waterfall or fountain and these can also include LED lighting.

All our ponds are provided with an high-strength wear resistant polyurea coating (2mm thick) on the inside as standard.

Each pond has 2 connections as standard, with 1 inch inner tread. In addition, each pond has an overflow pipe which can be easily removed. On our website you can download the installation manual and technical drawings.

Ponds and pond walls are made to order therefore never in stock. Delivery time for standard sizes is 8 weeks, delivery time for bespoke sizes on request.





Corten Steel pond (VC)



Wall placed on pond (VCM1...)



Wall freestanding (VCM2...) (VCM3...)

Custom				
Made Possible				KG
VC1 VC1.1	6000	1000	600 mm 400 mm	440 364
VC2 VC2.1	5000	1000	600 mm 400 mm	373 308
VC3 VC3.1	4000	1000	600 mm 400 mm	306 252
VC4 VC4.1	3000	2000	600 mm 400 mm	360 306
VC5 VC5.1	3000	1500	600 mm 400 mm	300 251
VC6 VC6.1	3000	1000	600 mm 400 mm	240 196
VC7 VC7.1	3000	800	600 mm 400 mm	215 174
VC8 VC8.1	2500	1250	600 mm 400 mm	233 192
VC9 VC9.1	2000	800	600 mm 400 mm	154 124
VC10 VC10.1	1500	800	600 mm 400 mm	124 99
VC11 VC11.1	1200	800	600 mm 400 mm	105 83

Custom Made Possible				KG
VCM1.1	3000	250	600 mm	80
VCM1.2	2500	и	ii .	68
VCM1.3	2000	и	ii .	55
VCM1.4	1500	и	"	43
VCM1.5	1250	и	u	36
VCM1.6	1000	и	"	30
Exclusive wa	terfall and _I	oump		
VCM2.1	3000	250	1200 mm	147
VCM2.2	2500	"	"	124
VCM2.3	2000	"	"	101
VCM3.1	1500	250	1000 mm	67
VCM3.2	1250	и	"	57
VCM3.3	1000	"	"	47
Evaluaiva	tarfall and	01.1100.10		

Exclusive waterfall and pump



Water Features

Our water features are sure to create an oasis in your garden. The variety of designs and shapes is enormous. Round, square and rectangular shapes are possible. Many of the models can be ordered with a waterfall or fountain and these can also include LED lighting.

Standard colours Aluminum RAL 7021, 7035, 9016. Almost all other standard RAL colours are possible (beware of start-up costs).

All our ponds are provided with an high-strength wear resistant polyurea coating (2mm thick) as standard.

Each pond has 2 connections as standard, with 1 inch inner tread. In addition, each pond has an overflow pipe which can be easily removed. On our website you can download the installation manual and technical drawings.

Ponds and pond walls are made to order therefore never in stock. Delivery time for standard sizes is 8 weeks, delivery time for bespoke sizes on request.





Corten Steel pond (VA)



Wall placed on pond (VM1...)



Wall freestanding (VM2...) (VM3...)

			KG
6000	1000	600 mm 400 mm	203 168
5000	1000	600 mm 400 mm	172 142
4000	1000	600 mm 400 mm	141 116
3000	2000	600 mm 400 mm	166 141
3000	1500	600 mm 400 mm	138 116
3000	1000	600 mm 400 mm	111 91
3000	800	600 mm 400 mm	99 80
2500	1250	600 mm 400 mm	108 89
2000	800	600 mm 400 mm	71 57
1500	800	600 mm 400 mm	57 45
1200	800	600 mm 400 mm	49 39
	5000 4000 3000 3000 3000 3000 2500 2000 1500	5000 1000 1	" 400 mm 5000 1000 600 mm 4000 mm 4000 1000 600 mm 400 mm 3000 2000 600 mm 400 mm 3000 1500 600 mm 400 mm 3000 1500 600 mm 400 mm 3000 1000 600 mm 400 mm 2500 1250 600 mm 400 mm 2500 1250 600 mm 400 mm 2500 1250 600 mm 400 mm 1500 800 600 mm 400 mm 1500 800 600 mm 400 mm

Custom Made Possible				K
VM1.1 VM1.2 VM1.3 VM1.4 VM1.5 VM1.6	3000 2500 2000 1500 1250 1000	250 " " " "	600 mm	58 49 38 30 25 21
Exclusive wa	aterfall and p	oump		
VM2.1 VM2.2 VM2.3	3000 2500 2000	250	1200 mm "	76 64 53
VM3.1 VM3.2 VM3.3	1500 1250 1000	250 "	1000 mm "	53 64 76

Exclusive waterfall and pump



Water Features

			KG
WNG1	600	140 mm	8
WNG2	800	210 mm	16
WNG3	1000	"	23
WNG4	1200	"	33
WNG5 *	1500	310 mm	75
WNS1	600	140 mm	8
WNS2	800	210 mm	16
WNS3	1000	"	23
WNS4	1200	"	33
WNS5 *	1500	310 mm	75
WNS6 **	2000	"	120

** Material 5mm

* Material 4mm



Water bowl (WNG) Coating DB703




Water bowl (WNS) Corten






Water table Aluminium (AB1-4)

Water table Corten (CB1-4)



Water table standard with LED light and pump

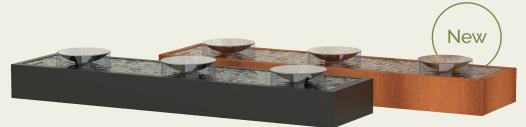

Water table with bowls Aluminum (ABS)

Water table with bowls Corten (CBS)

				KG
ABS2 4 water bowls ABS3 3 water bowls	5000 4000	1000	520 mm	188 147
CBS2 4 water bowls CBS3 3 water bowls	5000 4000	1000	520 mm	423 343

Water table standard with LED light, pump and water bowls



Water table Aluminium (ABR)



Water table Corten (CBR)

	Ø		KG
ABR1	1450	750 mm	61
ABR2	1200	"	46
ABR3	1000		36
ABR4	1450	400 mm	46
ABR5	1200	"	34
ABR6	1000		26
CBR1	1450	750 mm	165
CBR2	1200	"	126
CBR3	1000		98
CBR4	1450	400 mm	125
CBR5	1200	"	93
CBR6	1000	н	71

Water table standard with LED light and pump



Water table Aluminium (AB11-13)



Water table Corten (CB11-13)

				KG
AB11 AB12 AB13	1200 1000 800	1200 1000 800	400 mm "	40 30 22
CB11 CB12 CB13	1200 1000 800	1200 1000 800	400 mm "	115 87 62

Water table standard with LED light and pump




Water blocks

Unique Corten Steel or Aluminum water ornaments with a material thickness of 3 mm. We can produce almost any standard RAL-colour in Aluminum. The water bubbles up from a stainless steel nozzle with LED lighting in the middle of the top plate. The water then runs evenly along the sides of the block into the underground reservoir and is subsequently pumped up again. Comes with pump, LED lighting and nozzle.


5 year warranty



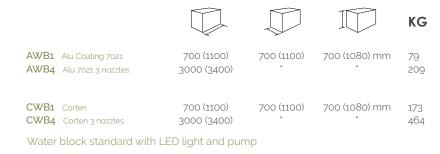



Water block







Accessories Water Features

All our accessories meet the highest standards and are a perfect fit to our products.







OASE PONTEC pump OASE LED light for waterfall OASE LED for watertable







Waterfall 3 pipes Waterfall 600 mm Waterfall 1500 mm

VB1	Waterfall 600 (outflow 50mm)
VB2	Waterfall 600 (outflow 150mm)
VB3	Waterfall 1500 (outflow 50mm)
VB4	Waterfall 1500 (outflow 150mm)
VB5	Waterfall 930 (outflow 3 pipes 200mm)
VB6	LED 600mm
VB7	LED 1500mm
VP1	Eco Pump 1500(25W) with hose
VP3	Eco Pump 5000(60W) with hose
VP4	Eco Pump 11000(80W) with hose
VP5	Pump Aqua Forte P-25000 with hose

Material	Corresponding pump
Stainless steel	VP3
и	VP3
и	VP5
и	VP5
и	VP3




Walls Fibreglass

These are extremely rigid walls, which can be mounted to any surface using the mounting strip along the length of the base.

Benefits fibreglass walls:

- · Cheaper than comparable walls
- · Light in weight due to hollow construction
- Very rigid fiber reinforced material
- Easy to maintain
- The standard colour used is white RAL 9016. Also available in RAL colours: 7021, 7035, 9010
- Easy self assembly lighting

The cleaning solution must be carefully chosen to ensure that it does not scratch the planter. Do not clean with steel wool, sand paper, solvents or any other abrasive materials, cleaning with a pressure washer can also cause damage. We have put together a special cleaning product: "Cleaner + Protector kit".

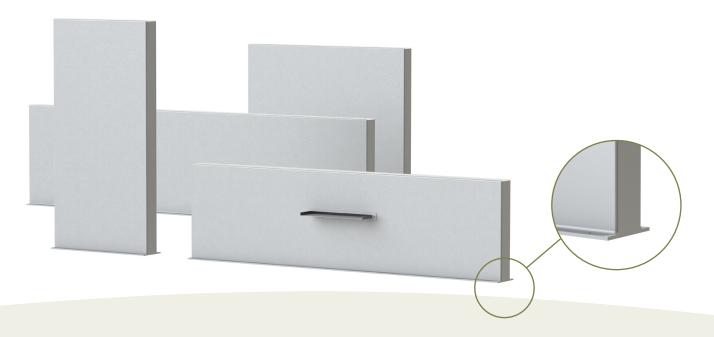



				K
PW1	4000	150	2000 mm	98
PW1.1	44	"	1500 mm	75
PW1.2	4	"	1000 mm	53
PW1.3	44	"	800 mm	43
PW2	3000	150	2000 mm	75
PW2.1	44	"	1500 mm	57
PW2.2	44	"	1000 mm	40
PW2.3	"	"	800 mm	33
PW3	2000	150	2000 mm	51
PW3.1		#	1500 mm	39
PW3.2		#	1000 mm	27
PW3.3	и	44	800 mm	23
PW5	1000	150	2000 mm	27
PW5.1		#	1500 mm	21
PW5.2	"	**	1000 mm	15
PW5.3	"	#	800 mm	12




Walls Aluminum

Aluminum walls are the perfect way to create a haven in your garden. It is possible to produce almost any size and they are available in almost all standard RAL colours. These are very rigid walls with a mounting strip on the base. To clean this product, we recommend "Cleaner and protector set", specially developed for cleaning of Aluminum, which is available from us.

Standard colours are RAL 7021, 7035, 9016. Almost all other standard RAL colours are possible (beware of start-up costs).



Cleaner and protector

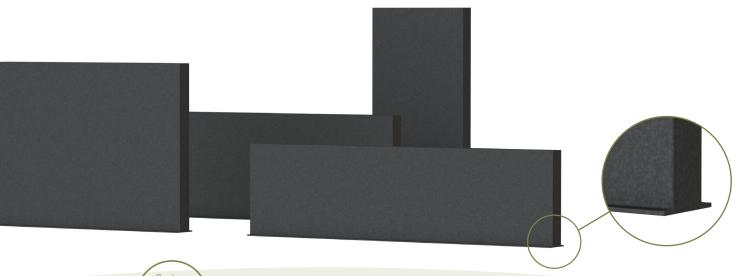



Custom Made Possible (6m max)				KG
AW1.1 AW1.2 AW1.3 AW1.4	4000	150	2000 mm 1350 mm 1000 mm 800 mm 600 mm	141 103 75 63 50
AW2.1 AW2.2 AW2.3 AW2.4	" " " " " " " " " " " " " " " " " " "	150	2000 mm 1350 mm 1000 mm 800 mm	107 75 57 47 38
AW3.1 AW3.2 AW3.3 AW3.4	2000	150	2000 mm 1350 mm 1000 mm 800 mm	73 51 39 32 26
AW4.1 AW4.2 AW4.3 AW4.4	1500 ""	150	2000 mm 1350 mm 1000 mm 800 mm 600 mm	58 40 31 25 20
AW5.1 AW5.2 AW5.3 AW5.4	1000	150	2000 mm 1350 mm 1000 mm 800 mm	39 27 21 17 14



Walls Corten Steel

The Corten steel walls are extremely rigid, which can be mounted to any surface using the mounting strip along the length of the base. The advantage of our Corten Steel Walls is that they have a hollow construction, so you can simply add lighting etc.

Benefits Corten Steel walls:

- Cheaper than comparable walls
- Very rigid material
- Easy to create surprising views
- Natural appearance
- Custom made possible
- Easy self assembly lighting etc.



Rust accelerator





Custom Made Possible (6m max)				KG
CW1 CW1.1 CW1.2 CW1.3 CW1.4	4000	150	2000 mm 1350 mm 1000 mm 800 mm 600 mm	282 205 149 122 96
CW2 CW2.1 CW2.2 CW2.3 CW2.4	" " 3000	150	2000 mm 1350 mm 1000 mm 800 mm 600 mm	214 149 113 93 73
CW3.1 CW3.2 CW3.3 CW3.4	2000	150	2000 mm 1350 mm 1000 mm 800 mm 600 mm	146 101 77 64 50
CW4.1 CW4.2 CW4.3 CW4.4	1500	150	2000 mm 1350 mm 1000 mm 800 mm 600 mm	146 101 77 64 38
CW5.1 CW5.2 CW5.3 CW5.4	1000	150 "	2000 mm 1350 mm 1000 mm 800 mm 600 mm	78 54 41 34 26



DECORATIVE LASERCUT PANELS

IN CORTEN STEEL EN POWDER COATED ALUMINUM

 $\ensuremath{\mathsf{ADEZZ}} \ensuremath{\mathbb{R}}$ decorative panels in Corten steel A and Aluminum.

Transparent panels help to give structure to your garden and can be used to create private intimate areas in the most exposed environments.

ADEZZ® decorative panels have an simple unique link system and are characterised by:

- High stability due to folded edges
- Materials; Corten steel A or Aluminum with a scratch-resistant colour coating
- Various fixing methods; on the floor / between columns, posts and walls
- Easy installation through good access to the fixing elements
- T-profiles available for placing in concrete and invisible connection of the panels.
- Rounded edge with tight frame on all sides which gives the panels stability
- Timeless design and applicable in any garden


Dimensions of the panels: Width 1100mm and Height 1800mm.

We have all designs in stock. The panels can be quickly and easily applied in your garden design.




APP1



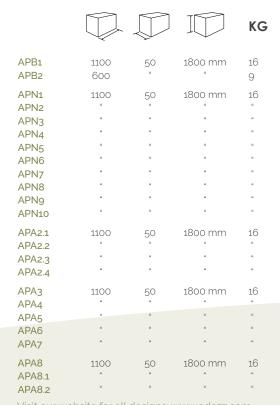


Visit our website for all designs: www.adezz.com

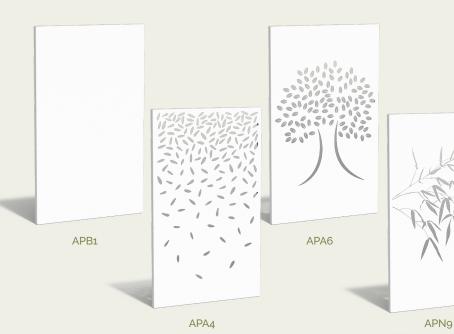





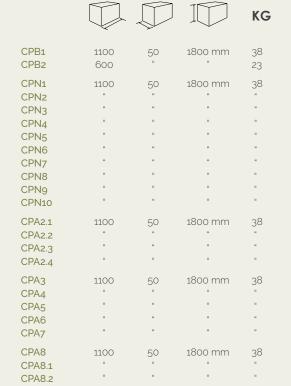

New





Pedestals

We make Solid and U-shaped pedestals in different sizes, allowing you to display objects upto 150kg. The openwork pedestal (U-block) can also be used as a wood storage unit.



Rust accelerator



Pedestals (CK)

Custom Made Possible				KG
CK1 CK2 CK3 CK4	500	500	1200 mm 1000 mm 800 mm 600 mm	42 36 29 23
CK5 CK6 CK7 CK8 CK9	400	400	1200 mm 1000 mm 800 mm 600 mm 400 mm	33 28 23 18
CK10 CK11 CK12 CK13	300	300	1000 mm 800 mm 600 mm 400 mm	21 17 13 9
CK20 CK21	1200 1000	1200 1000	400 mm	54 42
CK22 CK23	800 600	800 600	и	31 21
CK30 CK31 CK32	2000 1500 1000	400	400 mm "	44 34 24







Pedestals U block (CKU)

				KG
CKU1	500	500	1200 mm	52
CKU2	44	"	1000 mm	44
CKU3	"	ii .	800 mm	37
CKU4	"	"	600 mm	29
CKU5	400	400	1200 mm	41
CKU6	"	"	1000 mm	35
CKU7	"	"	800 mm	29
CKU8	44	"	600 mm	23
CKU9	44	**	400 mm	17



Letterboxes

We have in our collection four timeless mailbox models, which are available in either Corten Steel or powder coated Aluminum. The Aluminum powder coated version can be supplied in almost any RAL colour and it is possible to order numbers and letters for any of the models. All letterboxes have a lockable door and are supplied with two keys.

Standard colours Aluminum: RAL 7021, 7035, 9016. Almost all other standard RAL colours are possible (beware of start-up costs).

Available in Corten Steel and stainless steel:

0, 1, 2, 3, 4, 5, 6, 7, 8, 9, a, b, c, d











Ivar Hacon Flyn



Arto (RTAP1)

				KG
Ivar IVC1 Corten Ivar IVA1 Aluminum	300	300	1200 mm	25 14
Hacon HAC1 Corten Hacon HAA1 Aluminum	300	300	1200 mm "	25 14
Flyn LFC1 Corten Flyn LFA1 Aluminum	350	350	1150 mm "	41 18
Arto RTC1 Corten Arto RTA1 Aluminum	317	225	435 mm	8
Arto RTCP1 Corten Arto RTAP1 Aluminum	250	250	980 mm	16 8



CASE package box

Online shopping has become indispensible. You either stay home or burden your neighbours with recieving your package. Package box CASE solves this problem. Your order can be delivered to your address in your absence in an elegant way. By applying a valve the package will fall in the package box and can only be retrieved by you. The finish is stylish and compact. It is also a mail box and your house number can be applied easily.

Available in Corten Steel and Aluminum.

The CASE package box is equipped with a Soft Close mechanism for increased ease of use.

5 year warranty

Standard colours Aluminum: RAL 7021, 7035, 9016. Almost all other standard RAL colours are possible (start-up costs apply here).







Case PCC1 Corten
Case PCA1 Aluminum

n


40


1200mm "


58 30

Maximum package size 400x300x250 mm











PACA package box

Online shopping has become indispensible. You either stay home or burden your neighbours with recieving your package. Package box PACA solves this problem. Your order can be delivered to your address in your absence in an elegant way. By applying a valve the package will fall in the package box and can only be retrieved by you. The finish is stylish and compact. It is also a mail box and your house number can be applied easily.

Available in Corten Steel and Aluminum.

The PACA package box is equipped with a Soft Open mechanism for increased ease of use.

5 year warranty

Standard colours Aluminum: RAL 7021, 7035, 9016. Almost all other standard RAL colours are possible (start-up costs apply here).







Paca PPS1 Corten
Paca PPA1 Aluminum


870


300

1250mm 110 " 41

Maximum package size 600x400x240 mm









Stairs


We offer ready made garden staircases in Corten Steel for height differences in your garden. The width of these stairs may range from 1000mm to 3000mm.

Standard the steps have a height of 170 mm and we produce a staircase with a maximum of 10 or 17 steps.

Also available in Aluminum (4mm).

Standard colour Aluminum: RAL 9005. Almost all other standard RAL colours are possible (start-up costs apply here).

Stairs are made to order therefore never in stock. Delivery time is 3 weeks.







Corten steel stairs (CST)

Corten steel stairs (CST)




Custom Made Possible				KG
AST2.1 2 steps extra step (max 17)	1000	480 240	340 mm 170 mm	15 7
AST2.2 2 steps extra step (max 17)	1250	480 240	340 mm 170 mm	17 8
AST2.3 2 steps extra step (max 10)	1500	480 240	340 mm 170 mm	23 9
AST2.4 2 steps extra step (max 10)	2000	480 240	340 mm 170 mm	28 12
AST2.5 2 steps extra step (max 10)	2500	480 240	340 mm 170 mm	36 15
AST2.6 2 steps extra step (max 10)	3000	480 240	340 mm 170 mm	43 17





Edging

We produce our edging in galvanised steel and Corten Steel. Available in five heights 100, 150, 200, 290 and 390mm and the thickness of the material can be 2 or 3 mm. The length of the strips is 2300 mm. You can also choose from simple straight strips or the top angle of 90 degrees or flattened (180 degrees).

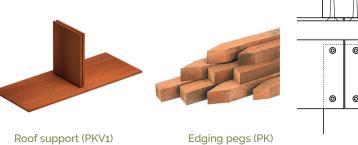

Edging pegs PK


PK 1 / 50x50x400 mm (25 pcs)

PK 2 / 50x50x600 mm (25 pcs)


PK 3 / 50x50x800 mm (25 pcs)

PKC1 / Steel 30x30x600 mm (25 pcs)

PKV1 / Steel roof support for 2mm edging




30mm




OOO

Front view


Edging straight 2300 X (H)100, 150, 200, 290 of 390




Edging put metal 2300 X (H)100, 150, 200, 290 of 390




Edging flattened 2300 X (H)100, 150, 200, 290 of 390



Corner inside or outside straight 300 X 300 (H)100, 150, 200, 290 of 390



Corner inside or outside put metal 300 X 300 (H)100, 150, 200, 290 of 390



Corner inside or outside flattened 300 X 300 (H)100, 150, 200, 290 of 390





Edging straight (2300mm)



Edging put metal (2300mm)



Edging flattened (2300mm)

Height	Thickness	Strips	
100mm	2mm	25 10	C/V R2 100 25 C/V R2 100 10
150mm	2mm	25 10	C/V R2 150 25 C/V R2 150 10
	3mm	25 10	C/V R3 150 25 C/V R3 150 10
200mm	2mm	25 10	C/V R2 200 25 C/V R2 200 10
	3mm	25 10	C/V R3 200 25 C/V R3 200 10
290mm	2mm	25 10	C/V R2 290 25 C/V R2 290 10
	3mm	25 10	C/V R3 290 25 C/V R3 290 10
390mm	2mm	25 10	C/V R2 390 25 C/V R2 390 10
	3mm	25 10	C/V R3 390 25 C/V R3 390 10

For Corten use code C For Galvanised use code V

8 countersunk holes incl. TX-20 screws per strip, this is optional at additional cost.

Height	Thickness	Strips	
100mm	2mm	25 10	C/V Z2 100 25 C/V Z2 100 10
150mm	2mm	25 10	C/V Z2 150 25 C/V Z2 150 10
	3mm	25 10	C/V Z3 150 25 C/V Z3 150 10
200mm	2mm	25 10	C/V Z2 200 25 C/V Z2 200 10
	3mm	25 10	C/V Z3 200 25 C/V Z3 200 10
290mm	2mm	25 10	C/V Z2 290 25 C/V Z2 290 10
	3mm	25 10	C/V Z3 290 25 C/V Z3 290 10
390mm	2mm	25 10	C/V Z2 390 25 C/V Z2 390 10
	3mm	25 10	C/V Z3 390 25 C/V Z3 390 10


For Corten use code C For Galvanised use code V

8 countersunk holes incl. TX-20 screws per strip, this is optional at additional cost.

Height	Thickness	Strips	
100mm	2mm	25 10	C/V P2 100 25 C/V P2 100 10
150mm	2mm	25 10	C/V P2 150 25 C/V P2 150 10
	3mm	25 10	C/V P3 150 25 C/V P3 150 10
200mm	2mm	25 10	C/V P2 200 25 C/V P2 200 10
	3mm	25 10	C/V P3 200 25 C/V P3 200 10
290mm	2mm	25 10	C/V P2 290 25 C/V P2 290 10
	3mm	25 10	C/V P3 290 25 C/V P3 290 10
390mm	2mm	25 10	C/V P2 390 25 C/V P2 390 10
	3mm	25 10	C/V P3 390 25 C/V P3 390 10

For Corten use code C For Galvanised use code V

8 countersunk holes incl. TX-20 screws per strip, this is optional at additional cost.



Corner straight (300x300mm)



Corner put metal (300x300mm)



Corner flattened (300x300mm)

Height	Thickness	Corner	
100mm	2mm	outside inside	C/V R2 100 BU C/V R2 100 BI
150mm	2mm	outside inside	C/V R2 150 BU C/V R2 150 BI
	3mm	outside	C/V R3 150 BU
		inside	C/V R3 150 BI
200mm	2mm	outside inside	C/V R2 200 BU C/V R2 200 BI
	3mm	outside inside	C/V R3 200 BU C/V R3 200 BI
290mm	2mm	outside inside	C/V R2 290 BU C/V R2 290 BI
	3mm	outside inside	C/V R3 290 BU C/V R3 290 BI
390mm	2mm	outside inside	C/V R2 390 BU C/V R2 390 BI
	3mm	outside inside	C/V R3 390 BU C/V R3 390 BI

For Corten use code C For Galvanised use code V

4 countersunk holes incl. TX-20 screws per corner element, optional at additional cost.

Height	Thickness	Corner	
100mm	2mm	outside inside	C/V Z2 100 BU C/V Z2 100 BI
150mm	2mm	outside	C/V Z2 150 BU
		inside	C/V Z2 150 Bl
	3mm	outside inside	C/V Z3 150 BU C/V Z3 150 BI
200mm	2mm	outside inside	C/V Z2 200 BU C/V Z2 200 BI
	3mm	outside inside	C/V Z3 200 BU C/V Z3 200 BI
290mm	2mm	outside inside	C/V Z2 290 BU C/V Z2 290 BI
	3mm	outside inside	C/V Z3 290 BU C/V Z3 290 BI
390mm	2mm	outside inside	C/V Z2 390 BU C/V Z2 390 BI
	3mm	outside inside	C/V Z3 390 BU C/V Z3 390 BI

For Corten use code C
For Galvanised use code V

4 countersunk holes incl. TX-20 screws per corner element, optional at additional cost.

100mm	2mm		C/V P2 100 BU C/V P2 100 BI
150mm	2mm		C/V P2 150 BU C/V P2 150 BI
	3mm	outside	C/VP3 150 BU C/VP3 150 BI
200mm	2mm		C/V P2 200 BU
	3mm		C/V P3 200 BL C/V P3 200 BI
290mm	2mm		C/V P2 290 BU C/V P2 290 BI
	3mm		C/V P3 290 BL C/V P3 290 Bl
390mm	2mm		C/V P2 390 BL C/V P2 390 Bl
	3mm	outside inside	C/V P3 390 BL C/V P3 390 BI

Height Thickness Corner

For Corten use code C
For Galvanised use code V

4 countersunk holes incl. TX-20 screws per corner element, optional at additional cost.





Retaining walls


With our range of retaining walls you can endlessly combine and almost any shape can be realised easily and quickly in your garden design. A prefab system which is easy to install with the supplied fasteners. These retaining walls have a top edge of 50x25mm as standard.

Options:

- Available in 2 different materials: Corten Steel and powder coated Aluminum
- Height: 200, 300, 400 and 600mm
- Straight pieces in length: 1000, 1500 and 2000mm
- Inside and outside corners, in lengths of 500 and 1000mm
- Inside and outside curves, with radius of 500, 1000, 1500 and 2000mm

Retaining walls are made to order therefore never in stock. Delivery time is 3 weeks.

5 year warranty

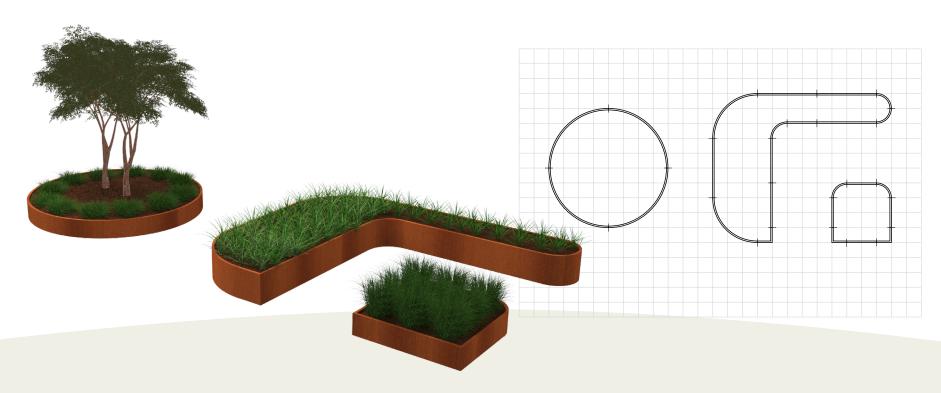

Retaining wall Straight 1000mm 1500mm 2000mm

Retaining wall Outside corner 500mm 1000mm


Retaining wall Inside corner 500mm 1000mm

Retaining wall Outside curve 500mm 1000mm 1500mm 2000mm






Retaining wall Inside curve















500mm

1000mm

1500mm

2000mm



CORTEN			KG	CORTEN			KG
CRS2.200.1000 straight CRS2.200.1500 straight CRS2.200.2000 straight		1000 1500 2000	6 9 12	CRS2.300.1000 straight CRS2.300.1500 straight CRS2.300.2000 straight		1000 1500 2000	9 14 18
CRSN2.200.500 inside corner CRSO2.200.500 outside corner CRSN2.200.1000 inside corner CRSO2.200.1000 outside corner		500	6 6 11 11	CRSN2.300.500 inside corner CRSO2.300.500 outside corner CRSN2.300.1000 inside corner CRSO2.300.1000 outside corner		500 "	8 8 16 15
CRCN2.200.500 inside curve CRC02.200.500 outside curve CRCN2.200.1000 inside curve CRC02.200.1000 outside curve CRCN2.200.1500 inside curve CRC02.200.1500 outside curve CRCN2.200.2000 inside curve CRCN2.200.2000 outside curve	200	500 "1000 "1500 "2000	5 4 9 9 13 13 17	CRCN2.300.500 inside curve CRC02.300.500 outside curve CRCN2.300.1000 inside curve CRC02.300.1000 outside curve CRCN2.300.1500 inside curve CRC02.300.1500 outside curve CRCN2.300.2000 inside curve CRCO2.300.2000 outside curve	300	500 " 1000 " 1500 " 2000	7 6 13 13 19 19 25 24
ALUMINIUM				ALUMINIUM			
ARS3.200.1000 straight ARS3.200.1500 straight ARS3.200.2000 straight		1000 1500 2000	3 4 6	ARS3.300.1000 straight ARS3.300.1500 straight ARS3.300.2000 straight		1000 1500 2000	4 6 8
ARSN3.200.500 inside corner ARSO3.200.500 outside corner ARSN3.200.1000 inside corner ARSO3.200.1000 outside corner		500 "	3 3 6 6	ARSN3.300.500 inside corner ARSO3.300.500 outside corner ARSN3.300.1000 inside corner ARSO3.300.1000 outside corner		500	4 4 8 8
ARCN3.200.500 inside curve ARCO3.200.500 outside curve ARCN3.200.1000 inside curve ARCO3.200.1000 outside curve ARCN3.200.1500 inside curve ARCO3.200.1500 outside curve ARCN3.200.2000 inside curve ARCN3.200.2000 inside curve	200	500 "1000 "1500 "2000	2 2 4 4 7 7 9	ARCN3.300.500 inside curve ARCO3.300.500 outside curve ARCN3.300.1000 inside curve ARCO3.300.1000 outside curve ARCN3.300.1500 inside curve ARCO3.300.1500 outside curve ARCN3.300.2000 inside curve ARCN3.300.2000 outside curve	300	500 " 1000 " 1500 " 2000	3 3 6 6 10 10 13

CORTEN			KG	CORTEN			KG
CRS3.400.1000 straight CRS3.400.1500 straight CRS3.400.2000 straight		1000 1500 2000	17 25 33	CRS3.600.1000 straight CRS3.600.1500 straight CRS3.600.2000 straight		1000 1500 2000	26 39 50
CRSN3.400.500 inside corner CRSO3.400.500 outside corner CRSN3.400.1000 inside corner CRSO3.400.1000 outside corner		500	18 16 33 31	CRSN3.600.500 inside corner CRSO3.600.500 outside corner CRSN3.600.1000 inside corner CRSO3.600.1000 outside corner		500	24 22 44 42
CRCN3.400.500 inside curve CRCO3.400.500 outside curve CRCN3.400.1000 inside curve CRCO3.400.1000 outside curve	400	500 " 1000	15 13 27 26	CRCN3.600.500 inside curve CRCO3.600.500 outside curve CRCN3.600.1000 inside curve CRCO3.600.1000 outside curve	600	500	20 18 37 35
CRCN3.400.1500 inside curve CRCO3.400.1500 outside curve CRCN3.400.2000 inside curve CRCO3.400.2000 outside curve		1500 " 2000 "	40 38 52 51	CRCN3.600.15000 inside curve CRCO3.600.1500 outside curve CRCN3.600.2000 inside curve CRCO3.600.2000 outside curve		1500 " 2000 "	54 53 70 68
ALUMINIUM				ALUMINIUM			
ARS4.400.1000 straight ARS4.400.1500 straight ARS4.400.2000 straight		1000 1500 2000	8 12 15	ARS4.600.1000 straight ARS4.600.1500 straight ARS4.600.2000 straight		1000 1500 2000	11 16 21
ARSN4.400.500 inside corner ARSO4.400.500 outside corner ARSN4.400.1000 inside corner ARSO4.400.1000 outside corner		500	8 7 15 14	ARSN4.600.500 inside corner ARSO4.600.500 outside corner ARSN4.600.1000 inside corner ARSO4.600.1000 outside corner		500	10 10 21 21
ARCN4.400.500 inside curve ARCO4.400.500 outside curve ARCN4.400.1000 inside curve ARCO4.400.1000 outside curve ARCN4.400.1500 inside curve ARCO4.400.1500 outside curve ARCN4.400.2000 inside curve	400	500 "1000 "1500 "2000	6 6 12 11 17 17 23	ARCN4.600.500 inside curve ARCO4.600.500 outside curve ARCN4.600.1000 inside curve ARCO4.600.1000 outside curve ARCN4.600.1500 inside curve ARCO4.600.1500 outside curve ARCN4.600.2000 inside curve	600	500 "1000 "1500 "2000	7 7 14 14 21 21 28
ARCO4.400.2000 outside curve		"	22	ARCO4.600.2000 outside curve		"	28





Accessories

All our accessories meet the highest standards and are a perfect fit to our products.







Descaler



Rust accelerator



Corten Varnish









Wheels 450 KG

Edging pegs (PK)

Roof support (PKV1)

OVL Overflow pipe Ø22mm x H. 50mm

POL Cleaner + Protector
CORT Rust accelerator

ALU Descaler

COR 0.5 Finish for Corten steel Owatrol 0.5 ltr.

COR 5.0 Finish for Corten steel Owatrol 5.0 ltr.

WL450 Wheels carrying capacity 450 KG (4 pcs)

PK2 50x50x400 mm (25 pcs)
PK2 50x50x600 mm (25 pcs)
PK3 50x50x800 mm (25 pcs)

PKC1 30x30x600 mm (25 pcs) 2 mm Steel edging pegs

PKV1 3 mm Steel roof support for 2 mm edging



ADEZZ®

WE PRODUCE GARDEN PRODUCTS FOR PROFESSIONALS

ADEZZ®

Production, distribution and sales
Liessentstraat 4, 5405 AG Uden
the Netherlands
t.+31 (0)413 745 423
www.adezz.com info@adezz.com

