


Made for Motion

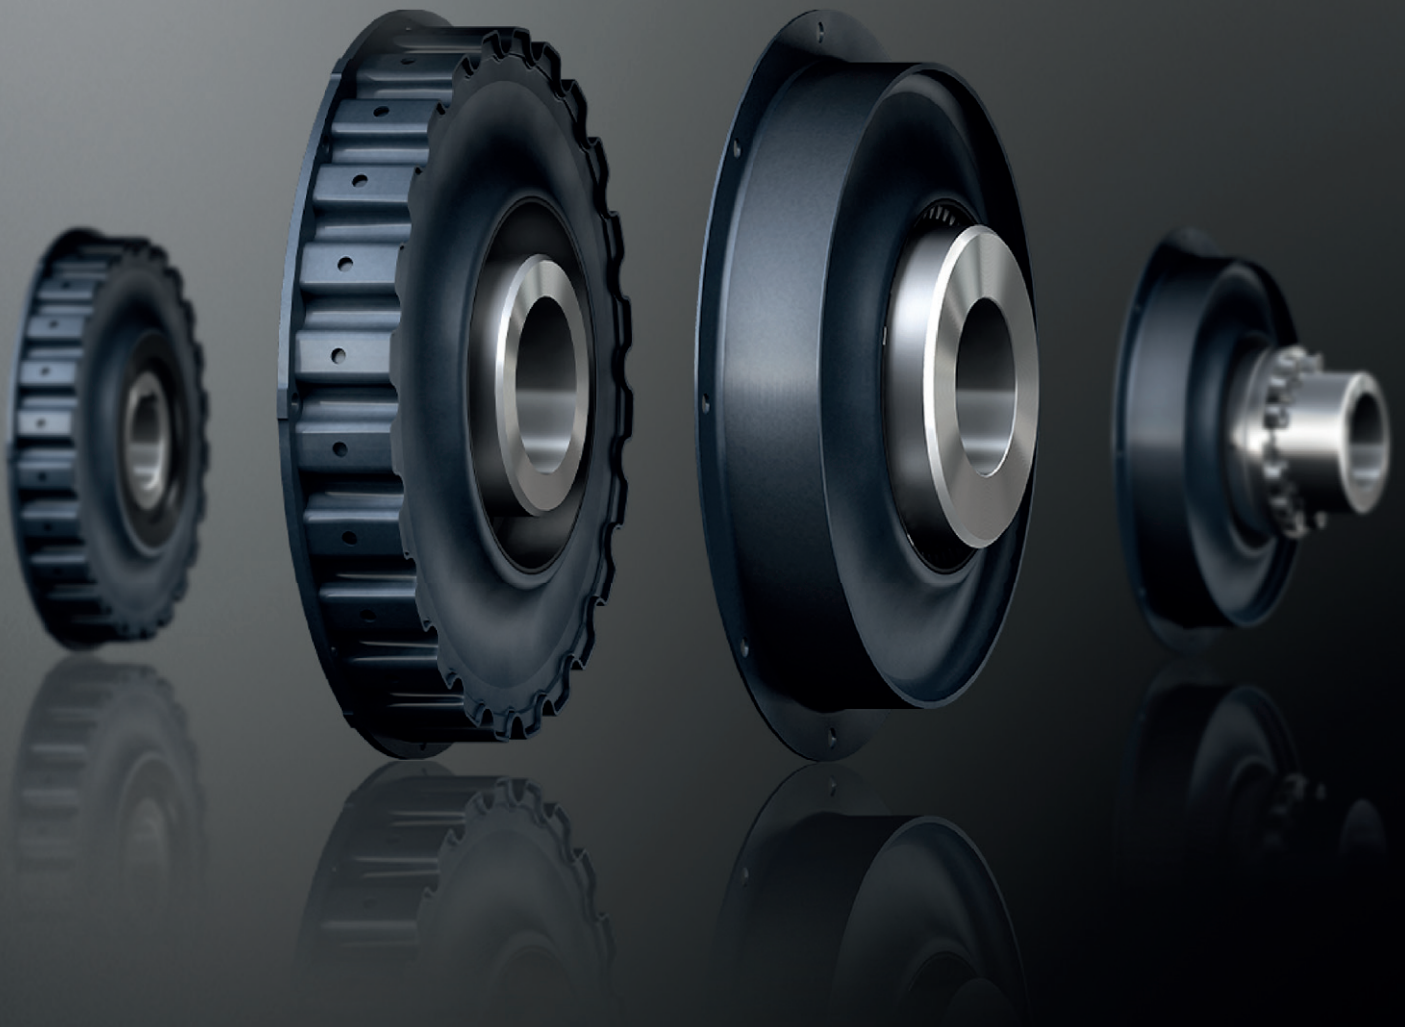

SINULASTIC®

Highly flexible flange couplings

ktr.com

Fast, easy and reliable – with the product finder and our online tools

The product finder allows you to get to the suitable product in just a few steps. For this purpose either make use of the search function if you already know the product or use the full-text search which guides you to the requested result via various product-specific filters. Our selection

tools speed up the detailed product selection. Few technical data suffice to rapidly find the right product for your application in the configurators - without having to browse catalogues lengthily.



Online tools

Tailor-made to your specifications – make use of our online tools



Product finder

The suitable product for your application – fast and simple with our product finder.

SINULASTIC®

highly flexible flange coupling

Examples of application



Diesel generator



Emergency generator



Working boat



Fishing vessel



Combine harvesters



Cold milling



Hydraulic excavators



Wheel loaders

FLANGE COUPLINGS

TYPES AND OPERATING DESCRIPTION

Properties of flange couplings


				
Product	BoWex® FLE-PA/-PAC	MONOLASTIC®	BoWex-ELASTIC®	SINULASTIC®
Type	Torsionally stiff flange coupling	Flexible flange coupling	Highly flexible flange coupling	Highly flexible flange coupling
Properties				
Torsionally stiff	●			
Torsionally flexible		●		
Highly flexible			●	●
Damping vibrations		●	●	●
Maintenance-free	●	●	●	●
Axial plug-in	●	●	●	●
Special features / applications				
Variant diversity	very high	high	very high	very high (type A, B, T, V)
Flange dimension	SAE standard and special dimensions	type 3/4 hole, SAE standard and special dimensions	SAE standard and special dimensions	SAE standard and special dimensions
Internal spline	see standard programme of BoWex® hubs	for SAE or DIN pump shafts	see standard programme of BoWex® hubs	Type B
Applications	hydrostatic drives of construction machines, agricultural machines, ...	hydrostatic drives of construction machines, agricultural machines, ...	generators, splitterboxes, water pumps, piston compressors, agricultural machines, gensets, mill drives, separator drives, ...	generators, gensets, splitterboxes, traction drives, hydraulic pumps, piston compressors, ...
Performance data				
Max. rated torque T _{KN} [Nm]	6,600	1,850	70,000	25,000
Max. speed n [rpm]	6,000	6,000	6,200	3,800
Flange (standard and special)				
Material	fibre-glass reinforced polyamide (PA)	natural rubber	natural rubber	natural rubber EPDM
	combination of polyamide with carbon fibre share and steel flange (PAC)			
Elastomer hardness	Torsionally stiff	65, 70 Shore A	various kinds of hardness for vibration adaptation of drives	miscellaneous: S, M, H, U
Flange (standard)				
Temperature range [°C] min./max.	-25 / +130 (PA)	-40 / +100	-40 / +100	-40 / +120
	-25 / +130 (PAC)			
Engine power [kW]				
Max.	800	250	5,000	3,500

- ≈ Standard
- ≈ On request
- * ≈ Depending on size

FLANGE COUPLINGS

TYPES AND OPERATING DESCRIPTION

Product finder of flange couplings

				
Product	BoWex® FLE-PA/-PAC	MONOLASTIC®	BoWex-ELASTIC®	SINULASTIC®
Type	Torsionally stiff flange coupling	Flexible flange coupling	Highly flexible flange coupling	Highly flexible flange coupling
Geometries				
Design	extremely short	short	short	short
Max. radial displacement	0.5 mm	1 mm	9.5 mm	3 mm
Shaft diameter min./max. [mm]	20 / 125	20 / 60	21 / 275	20 / 240
Types (extract)				
Intermediate shaft types » bridging larger shaft distances	–	–	HE-ZS	Type B and V
Shaft-to-shaft connection		–	HEW1 and HEW2, HEW-ZS	○
Flange-to-shaft connection	Standard	Standard	HE1, HE2, HE3 and HE4, HE-ZS	●
For cardan shafts » connecting couplings for I. C.-engines	–	–	HEG1 and HEG2	○
Combination with pump mounting flange	●	●	●	●
Certifications / type examinations				
ATEX 			●	○
Bureau Veritas 	●		●	○
DNV/GL 			●	○
GOST R / GOST TR 	●	●	●	○

● ≈ Standard

Please note: Pump mounting flanges



For connecting hydraulic pumps to the diesel engine KTR supplies mounting flanges according to SAE connection dimensions sizes SAE 6 to SAE 1. These flanges are made of steel and EN-GJL-250 for hydraulic pumps with flange connections according to SAE-A, -B, -C, -D and -E as types with 2 and 4 holes.

Pump connection housings made of EN-GJL-250 to be mounted directly to the back plate of the engine.

SINULASTIC®

highly flexible flange coupling

Description of product and application

SINULASTIC® is a modularly structured series of highly flexible flange couplings based on a disk-shaped coupling body. Four practical basic versions with individual properties cover a wide range of applications primarily for diesel engine drives, but also general drive tasks.

The main task of the coupling is reducing torsional vibrations resulting from excitations of the I. C.-engine during standard operation and misfire operation as well as protecting the drive from overload. It is a good option both for variable speed and constant speed drives, while a supercritical selection of the drive train above resonance level is always made. Particularly for the series the coupling disk requires smallest possible axial mounting space.

Depending on the type the coupling is pluggable and compensates for displacements resp. tolerances moderately to very well. It is a non-slip or shear type and radially mountable.

The elastomer element is available in various qualities for all types. It is composed of natural rubber compounds optimised over many years (SN, MN, HN, UN up to 80 °C) or upon request of synthetical EPDM material for higher temperatures (SE, ME, HE, UE up to 100 °C). The various kinds of rubber hardness cover one application and torque range per size. The vibratory properties of the four types are compatible within one size.

A wide portfolio of hub connections covers a large variety of shaft configurations on the driven side while special connections can be realised.




SINULASTIC® - The types



A



T



B



V

SINULASTIC® A is the evolution design of the renowned disk coupling with plug-in spline between elastomer and flange ring as well as hub vulcanized on. The tooth shape that is subject to high loads particularly with alternating loads in the contact area between motor flange and rubber was extensively optimized, the new sinusoidal tooth shape being eponymous for the series. For the first time the engine flange was realised by a deep-drawn sheet metal section creating a beneficial and smooth surface to the elastomer. Another benefit is the tight contact gap for easy mountability with at the same time highly sound and defined form fit.

In contrast to type A a Taperlock shaft connection as a standard version with feather key is used with SINULASTIC® T. The modular concept makes use of the plug-in ability of type A on the flange side.

Type B and V make use of a deep-drawn and inherently stable flange ring that the elastomer part is vulcanized on externally. This results in a low-cost solution for high speeds and overloads.

In combination with the renowned BoWex® inner hub the SINULASTIC® B as an all-rounder of the overall series is formed. The so-called BoWex® hub defines a pluggable connection resistant to high loads as well as beneficial adaptations on the driven side up to long driving shaft systems owing to the potentials for particularly high displacements. The hub and connection variants of BoWex®-ELASTIC are fully compatible with the elastomer elements of this series.


SINULASTIC® V is used beneficially where the ability for axial plug-in is not required. A resulting radial assembly is realised by a split ring on the hub side.

The slim wasteline shape of the elastomer elements of this type allows for significant displacements in axial, radial and angular direction without any wear, while the coupling element is suitable both for not flange-mounted assembly, i. e. for system configurations set up freely, and as a shaft coupling with cardanic misalignment.

Properties of types compared

Properties of types compared			
Properties	SINULASTIC® A SINULASTIC® T	SINULASTIC® V	SINULASTIC® B
Rated torque T _{KN}	Compatible within the series		
Maximum torque T _{Kmax}	≥ 2x T _{KN}	3x T _{KN}	3x T _{KN}
Vibratory properties, e. g. torsional stiffness	Compatible within the series		
Materials ¹⁾	Natural rubber compounds up to 80 °C for hardness ranges WN, SN, MN and HN, synthetical EPDM up to 100 °C for hardness ranges WE, SE, ME and HE		
Plug-in	Yes	No	Yes
Radial assembly	Partially possible	Yes	No
Mounting length	++	Ø	++
Axial displacement	++	+	++
Radial displacement	Ø	+	+
Angular displacement	Ø	++	++
Standard	For flywheel flange and shaft connection (SAE J620, DIN 5480 et seqq., DIN 6281, etc.)		
Special solutions	Bearing-mounted intermediate coupling, with failure protection, combination with shifting unit	Cardanic offset joint, failure protection, shaft systems	
	Application-specific shaft connections of elastomer elements		



¹⁾The standard materials and availabilities depend on the size and type, special compounds available on request

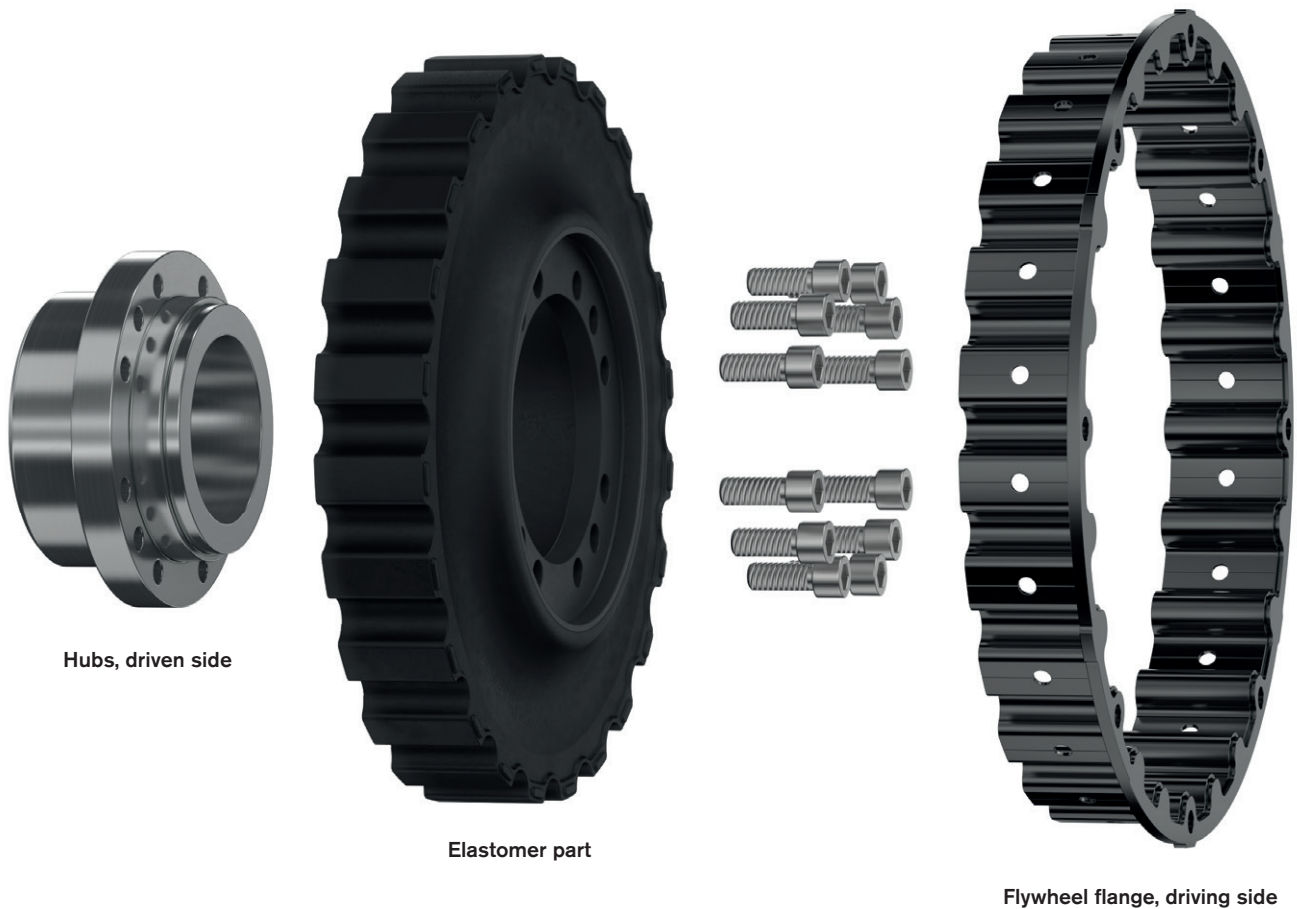

SINULASTIC® A

highly flexible flange coupling

Pluggable disk coupling with optimal tooth contact

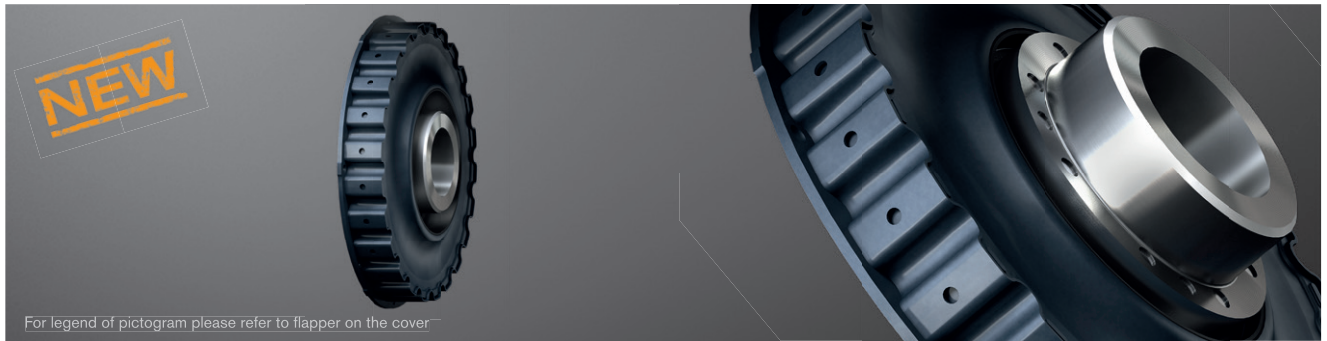


Technical data													
Size	Elastomer type	Torque [Nm] ¹⁾				Dynamic torsion spring stiffness C _{dyn} , [Nm/rad]		Relative damping ψ [-]		Perm. damping power P _{KW} [W] ²⁾		Operating speed [rpm]	
		T _{KN}	T _{Kmax}	T _{Kmax1}	T _{KW}	30 °C	60 °C	30 °C	60 °C	30 °C	60 °C	n	n _{max} .
20	SN	1750	2625	3500	700	7200	5760	1.00	0.80	210	126	2700	3000
	MN	2000	3000	4000	800	11500	9200	1.10	0.90	240	144	2700	3000
	HN	2500	3750	5000	1000	18500	14800	1.30	1.10	270	162	3240	3600
38	SN	3000	4500	6000	1200	14500	11600	1.00	0.80	275	165	2520	2800
	MN	3800	5700	7600	1520	22000	17600	1.10	0.90	300	180	2520	2800
	HN	4600	6900	9200	1840	34000	27200	1.30	1.10	330	198	2880	3200
53	SN	4000	6000	8000	1600	17000	13600	1.00	0.80	285	171	2340	2600
	MN	5300	7950	10600	2120	28000	22400	1.10	0.90	325	195	2340	2600
	HN	6200	9300	12400	2480	43500	34800	1.30	1.10	370	222	2700	3000
140	SN	12000	18000	24000	4800	106000	84800	1.00	0.80	540	324	1890	2100
	MN	14000	21000	28000	5600	149000	119200	1.10	0.90	550	330	1890	2100
	HN	16200	24300	32400	6480	235000	188000	1.30	1.10	570	342	2070	2300
	UN	19000	28500	38000	7600	310000	248000	1.40	1.20	590	354	2070	2300
180	SN	14600	21900	29200	5840	132000	105600	1.00	0.80	620	372	1890	2100
	MN	18000	27000	36000	7200	185000	148000	1.10	0.90	630	378	1890	2100
	HN	22000	33000	44000	8800	295000	236000	1.30	1.10	650	390	2070	2300
	UN	25000	37500	50000	10000	410000	328000	1.40	1.20	670	402	2070	2300

- ¹⁾ T_{KN} Torque that can be constantly transmitted over the entire speed range.
T_{Kmax} Transient torque peaks (e. g. resonance passage), min. 100,000 load alternation pulsating / 50,000 load alternation vibratory
T_{Kmax1} Torque loads rarely, min. 1,000 load alternation
For selection consider DIN 740 part II (operating factor, temperature factor), parameters for an ambient temperature of 30 °C.
²⁾ Here permanent damping power. Twice the damping power figure is permissible for one hour.


SINULASTIC® type AK / AL																					
Size	Max. bore D [mm]	Flange connection acc. to SAE - J620						Dimensions [mm]										Mass moment of inertia [kgm ²] ¹⁾		Weight [kg] ¹⁾	
		11 1/2"	14"	18"	21"	24"	Ø475	DN	D5	L1	L3	L4		L5	L7	MxLM	G	T	J _A		J _L
												AK	AL								
20	80	●						112	164	75	60	88 ±2	125 ±2	8	36 13.6	M12x30	M10	20	0.0881	0.0516	13.18
			●																		0.0128
38	115		●					162	244	100	58	93.5 ±3	123 ±3	7	7	M16x40	M16	40	0.2412	0.1994	25.47
				●																	0.5506
53	115			●				162	247	105	70	92.5 ±3	146 ±3	13	7	M16x40	M16	40	0.2583	0.1994	25.79
			●																		0.2981
140	175				●			248	431	200	94	200 ±3	280 ±3	3	14	M20x60	-	-	0.6150	0.2379	34.02
						●															0.3165
180	175					●		248	431	200	114	200 ±3	300 ±3	3	14	M20x60	-	-	1.6680	2.1667	101.71
							●														2.5308
																			1.9588	2.4306	110.09
																			2.8216	2.4306	117.17

¹⁾ With max. bore

Type AK

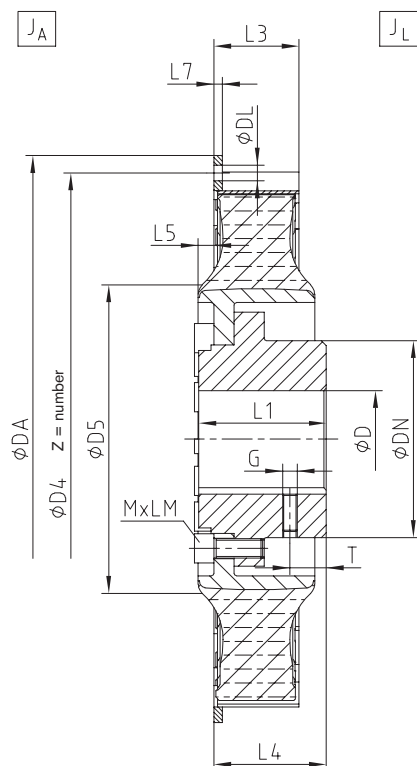


Type AL

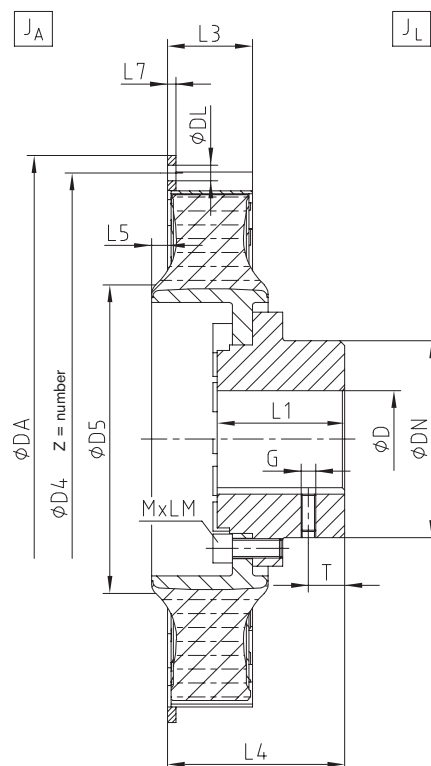


Types AK and AL specify the standard with variable hub connections as a short or long version


Flange dimensions according to SAE J620 [mm]				
Nominal size	DA	D4	Z	DL
11 1/2"	352.42	333.37	8	11
14"	466.72	438.15	8	13
18"	571.50	542.90	6	17
21"	673.10	641.35	12	17
24"	733.42	692.15	12	21
Ø475	475	450	12	11

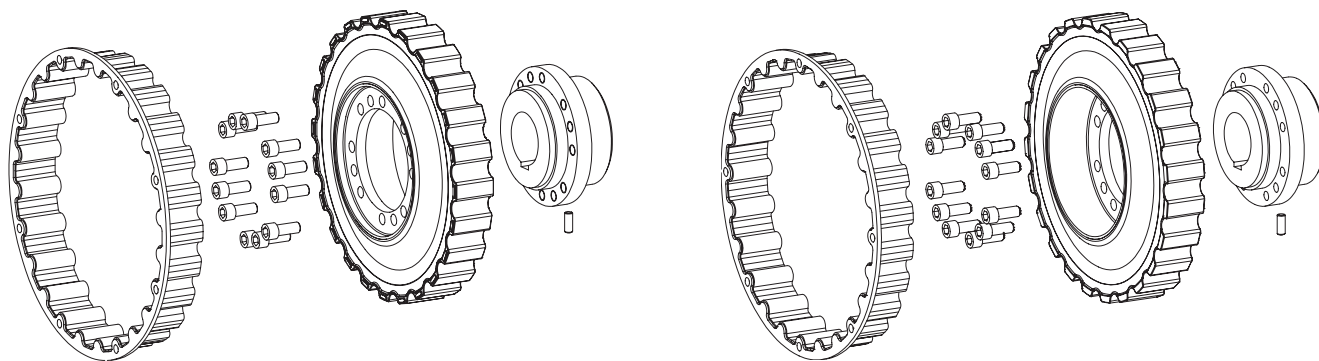


Types of hubs type AK / AL ¹⁾




Type 1.0
with feather keyway
and setscrew
(acc. to standard AK, AL)




Type 1.3
spline toothing



Type 2.1
clamping hub
single slot with
feather keyway



Type 3.1
spline/clamping hub N



Type 8.0
taper interference fit

Type 8.1
cylindrical
interference fit


¹⁾Dimensions and type may differ depending on size, other types of hubs on request

SINULASTIC® A


highly flexible flange coupling

Type ALC / AKC

Type AKC

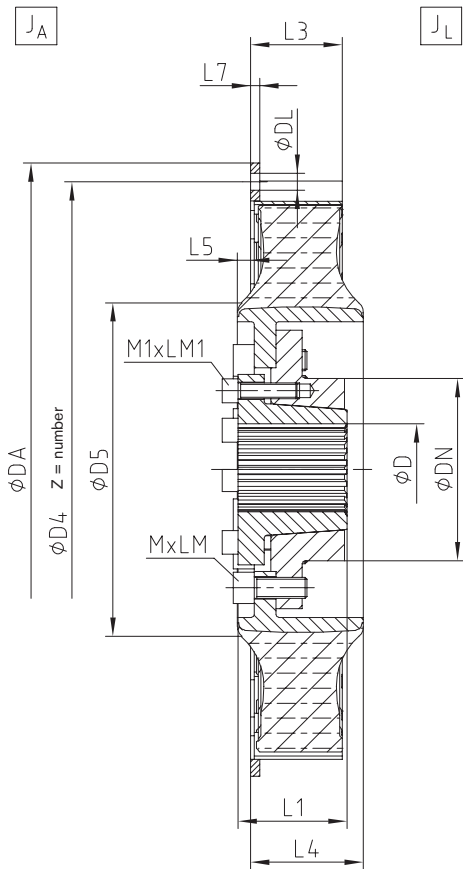


Type ALC

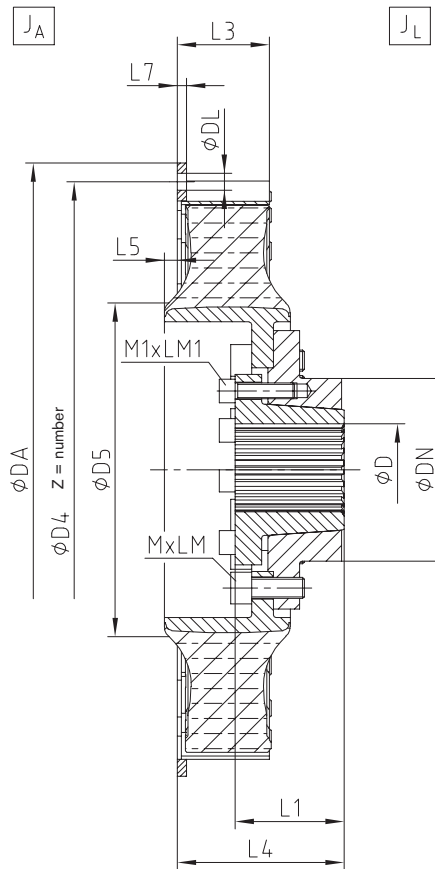

Types AKC and ALC specify the hub type as a spline clamping ring hub

Flange dimensions according to SAE J620 [mm]				
Nominal size	DA	D4	Z	DL
11 1/2"	352.42	333.37	8	11
14"	466.72	438.15	8	13
18"	571.50	542.90	6	17
21"	673.10	641.35	12	17
24"	733.42	692.15	12	21
Ø475	475	450	12	11

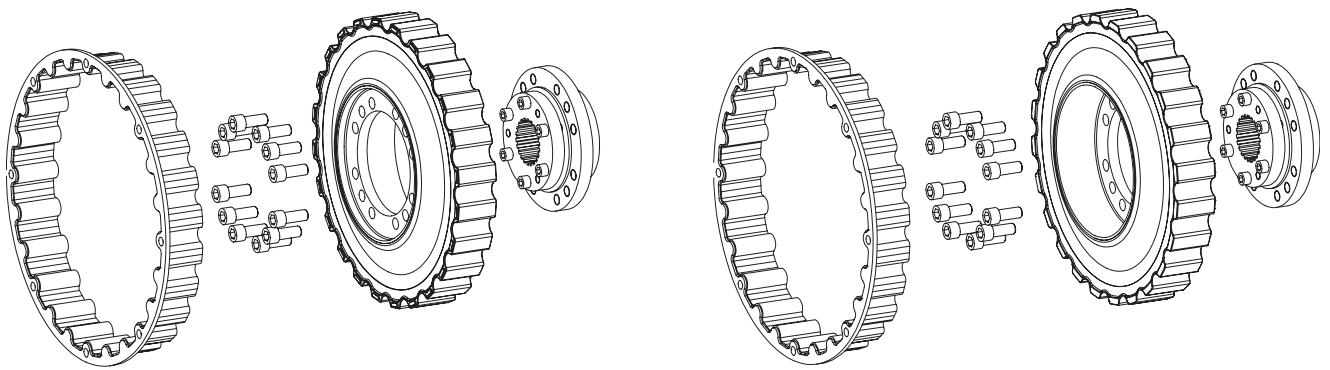

SINULASTIC® type AKC / ALC																		
Size	Bore D [mm]		Flange connection acc. to SAE - J620						Dimensions [mm]									
	Pilot bored	Max.	11 1/2"	14"	18"	21"	24"	Ø475	DN	D5	L1	L3	L4		L5	L7	MxLM	M1xLM1
													AK	AL				
20	30	50	●						109	164	57	60	68 ±2	93 ±2	8	36 13.6	M12x30	M10x30
				●														
					●													
38	46	80				●			139	244	69	58	65 ±3	92 ±3	7	7	M16x40	M10x40
								●										
				●														
53	46	80							139	247	83	70	83 ±3	124 ±3	13	7	M16x40	M12x45
								●										
140																		
180																		


On request

¹⁾ With max. bore


SINULASTIC® A

highly flexible flange coupling


Displacements

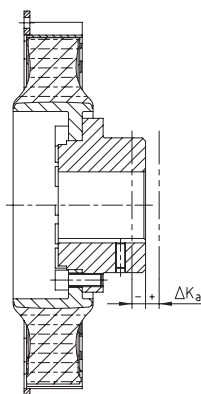

Axial displacement

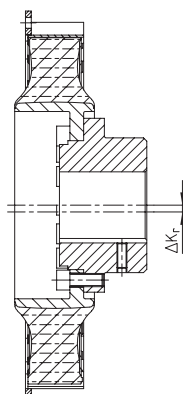

Radial displacement

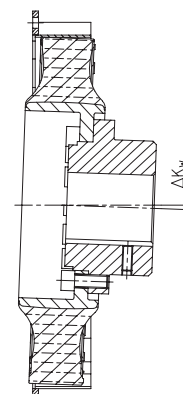

Angular displacement

SINULASTIC® A size		20	38	53	140	180
Perm. axial displacement ΔK_a [mm] ²⁾		±2.0	±3.0	±3.0	±3.0	±3.0
Perm. radial displacement ΔK_r [mm]	1500 rpm	0.8	1.1	1.1	1.5	1.5
	$n_{max.}$	0.6	0.8	0.8	1.1	1.1
	max. ¹⁾	1.6	2.2	2.2	3.0	3.0
Perm. angular displacement ΔK_w [degree]	1500 rpm	0.7	0.6	0.6	0.4	0.4
	$n_{max.}$	0.5	0.4	0.4	0.3	0.3
	max. ¹⁾	1.1	0.9	0.9	0.6	0.6

¹⁾With assembly for a short time resp. rarely with downtime or start-up operation as well as exceptional load conditions.

²⁾Plug-in fit in the tooth contact allows for alternative mounting lengths

Ordering
example:

SINULASTIC® 53	ALC	M	14	1.3	DIN 5480 - 60x2x28
Coupling size	Type	Elastomer hard- ness	Flange ØDA acc. to SAE or special	Hub type	Finish bore

SINULASTIC® T



highly flexible flange coupling

Pluggable disk coupling with optimal tooth contact



Components

Type T specifies the hub type as Taperlock shaft connection

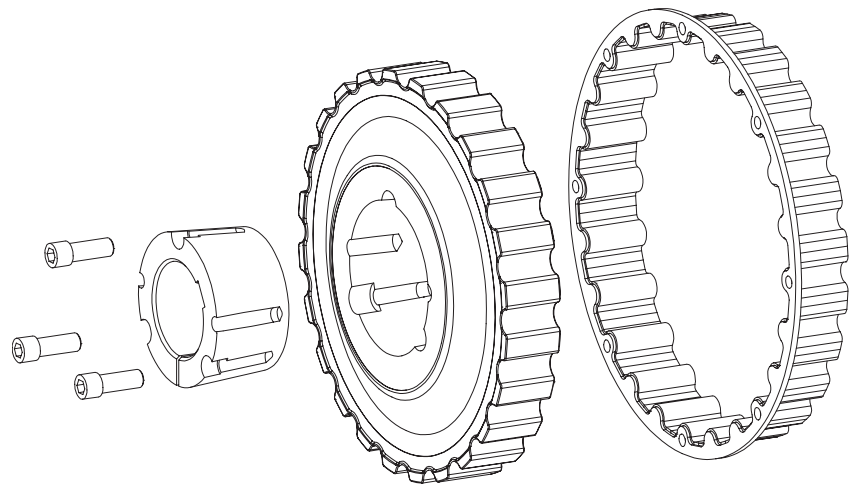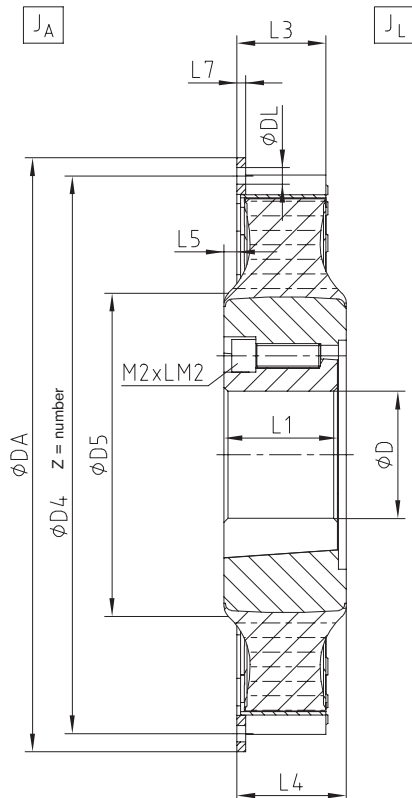

Flange dimensions according to SAE J620 [mm]				
Nominal size	DA	D4	Z	DL
11 1/2"	352.42	333.37	8	11
14"	466.72	438.15	8	13
18"	571.50	542.90	6	17
21"	673.10	641.35	12	17
24"	733.42	692.15	12	21
Ø475	475	450	12	11


Technical data													
Size	Elastomer type	Torque [Nm] ¹⁾				Dynamic torsion spring stiffness C _{dyn} , [Nm/rad]		Relative damping ψ [-]		Perm. damping power P _{KW} [W] ²⁾		Operating speed [rpm]	
		T _{KN}	T _{Kmax}	T _{Kmax1}	T _{KW}	30 °C	60 °C	30 °C	60 °C	30 °C	60 °C	n	n _{max.}
20	SN	1750	2625	3500	700	7200	5760	1.00	0.80	210	126	2700	3000
	MN	2000	3000	4000	800	11500	9200	1.10	0.90	240	144	2700	3000
	HN	2500	3750	5000	1000	18500	14800	1.30	1.10	270	162	3240	3600
38	SN	3000	4500	6000	1200	14500	11600	1.00	0.80	275	165	2520	2800
	MN	3800	5700	7600	1520	22000	17600	1.10	0.90	300	180	2520	2800
	HN	4600	6900	9200	1840	34000	27200	1.30	1.10	330	198	2880	3200
53	SN	4000	6000	8000	1600	17000	13600	1.00	0.80	285	171	2340	2600
	MN	5300	7950	10600	2120	28000	22400	1.10	0.90	325	195	2340	2600
	HN	6200	9300	12400	2480	43500	34800	1.30	1.10	370	222	2700	3000

¹⁾ T_{KN} Torque that can be constantly transmitted over the entire speed range.
T_{Kmax} Transient torque peaks (e. g. resonance passage), min. 100,000 load alternation pulsating / 50,000 load alternation vibratory
T_{Kmax1} Torque loads rarely, min. 1,000 load alternation
For selection consider DIN 740 part II (operating factor, temperature factor), parameters for an ambient temperature of 30 °C.
²⁾ Here permanent damping power. Twice the damping power figure is permissible for one hour.


SINULASTIC® type T																				
Size	Bore D [mm]		Flange connection acc. to SAE - J620						Dimensions [mm]						Taper clamping sleeve		Mass moment of inertia [kgm²] ¹⁾		Weight [kg] ¹⁾	
	Pilot bored	Max.	11½"	14"	18"	21"	24"	Ø475	D5	L1	L3	L4	L5	L7	M2xLM2	Type	JA	JL		
20	35	90	●						164	63.5	60	68 ±2	8	36	1/2"x38	3525	0.0881	0.0504	13.07	
				●														0.0128	0.0504	14.14
38	40	110		●					244	76.2	58	70 ±3	7	7	5/8"x44	4030	0.2412	0.2429	29.51	
					●													0.5506	0.2429	34.15
								●										0.2583	0.2429	29.82
53	55	125		●		●			247	89	70	83 ±3	13	7	3/4"x50	4535	0.2870	0.2993	33.84	
						●												0.5965	0.2993	38.52
								●										0.3042	0.2993	34.18

¹⁾ With max. bore


Displacements

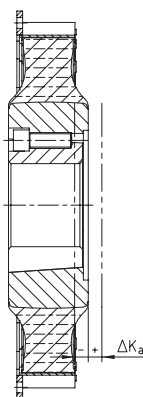

Axial displacement

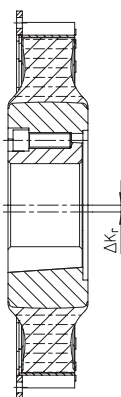

Radial displacement

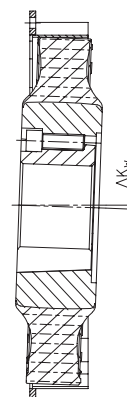

Angular displacement

SINULASTIC® T size		20	38	53
Perm. axial displacement ΔK_a [mm] ²⁾		±2.0	±3.0	±3.0
Perm. radial displacement ΔK_r [mm]	1500 rpm	0.8	1.1	1.1
	$n_{max.}$	0.6	0.8	0.8
	max. ¹⁾	1.6	2.2	2.2
Perm. angular displacement ΔK_w [degree]	1500 rpm	0.7	0.6	0.6
	$n_{max.}$	0.5	0.4	0.4
	max. ¹⁾	1.1	0.9	0.9

¹⁾ With assembly for a short time resp. rarely with downtime or start-up operation as well as exceptional load conditions.

²⁾ Plug-in fit in the tooth contact allows for alternative mounting lengths


Ordering
example:

SINULASTIC® 53	T	M	14	1.0	Ø75
Coupling size	Type	Elastomer hard- ness	Flange ØDA acc. to SAE or special	Hub type	Finish bore



SINULASTIC® B

highly flexible flange coupling

Disk coupling pluggable inside



Components

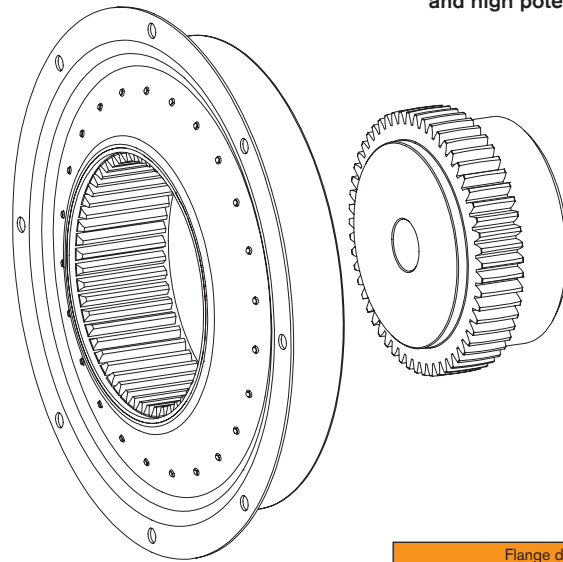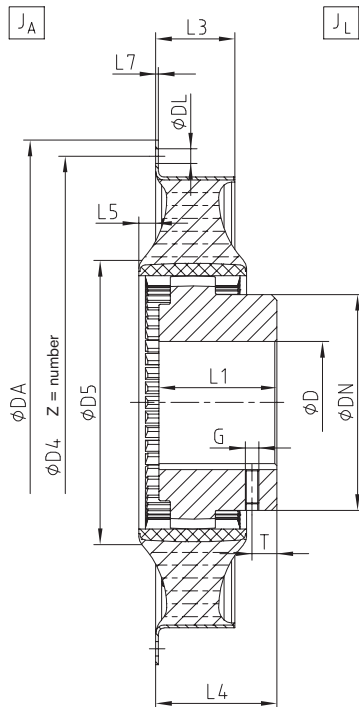

Type B specifies a type pluggable in the hub for variable use and high potential for offset

Flange dimensions according to SAE J620 [mm]				
Nominal size	DA	D4	Z	DL
11 1/2"	352.42	333.37	8	11
14"	466.72	438.15	8	13
18"	571.50	542.90	6	17
21"	673.10	641.35	12	17
24"	733.42	692.15	12	21
Ø475	475	450	12	11


Technical data													
Size	Elastomer type	Torque [Nm] ¹⁾				Dynamic torsion spring stiffness C _{dyn} [Nm/rad]		Relative damping ψ [-]		Perm. damping power P _{KW} [W] ²⁾		Operating speed [rpm]	
		T _{KN}	T _{Kmax}	T _{Kmax1}	T _{KW}	30 °C	60 °C	30 °C	60 °C	30 °C	60 °C	n	n _{max}
20	SN	1750	2625	5250	700	7200	5760	1.00	0.80	210	126	3240	3600
	MN	2000	3000	6000	800	11500	9200	1.10	0.90	240	144	3240	3600
	HN	2500	3750	6200	1000	18500	14800	1.30	1.10	270	162	3420	3800
38	SN	3000	4500	9000	1200	14500	11600	1.00	0.80	275	165	2880	3200
	MN	3800	5700	9600	1520	22000	17600	1.10	0.90	300	180	2880	3200
	HN	4600	6900	9600	1840	34000	27200	1.30	1.10	330	198	3240	3600
53	SN	4000	6000	12000	1600	17000	13600	1.00	0.80	285	171	2700	3000
	MN	5300	7950	14400	2120	28000	22400	1.10	0.90	325	195	2700	3000
	HN	6200	9300	14400	2480	43500	34800	1.30	1.10	370	222	3060	3400
140	SN	12000	18000	36000	4800	106000	84800	1.00	0.80	540	324	2160	2400
	MN	14000	21000	42000	5600	149000	119200	1.10	0.90	550	330	2160	2400
	HN	16200	24300	48600	6480	235000	188000	1.30	1.10	570	342	2520	2800
180	SN	14600	21900	43800	5840	132000	105600	1.00	0.80	620	372	2160	2400
	MN	18000	27000	54000	7200	185000	148000	1.10	0.90	630	378	2160	2400
	HN	22000	33000	66000	8800	295000	236000	1.30	1.10	650	390	2340	2600

¹⁾ T_{KN} Torque that can be constantly transmitted over the entire speed range.
T_{Kmax} Transient torque peaks (e. g. resonance passage), min. 100,000 load alternation pulsating / 50,000 load alternation vibratory
T_{Kmax1} Torque loads rarely, min. 1,000 load alternation
For selection consider DIN 740 part II (operating factor, temperature factor), parameters for an ambient temperature of 30 °C.
²⁾ Here permanent damping power. Twice the damping power figure is permissible for one hour.


SINULASTIC® type B																			
Size	Max. bore D [mm]	Flange connection acc. to SAE - J620						Dimensions [mm]									Mass moment of inertia [kgm²] ¹⁾		Weight [kg] ¹⁾
		11 ½"	14"	18"	21"	24"	Ø475	DN	D5	L1	L3	L4	L5	L7	G	T	J _A	J _L	
20	80	●						124	169	75	60	80,5 ±21	8.5	2.0	M10	20	0.0625	0.0338	9.71
			●														0.1114	0.0338	10.85
			●														0.1524	0.2076	28.94
38	125			●				200	245	140	52	136 ±14	10	2.5	M16	40	0.1578	0.2076	30.62
							●										0.2655	0.2076	29.04
			●														0.1888	0.2280	30.85
53	125			●				200	247	140	70.5	143 ±20	15	2.5	M16	40	0.1942	0.2280	32.52
							●										0.302	0.2280	30.95
140	240				●			326	431	200	81	175 ±12	10	3	-	-	0.8816	1.8812	83.57
						●											1.0708	1.8812	85.10
180	240				●			326	431	200	101	185 ±22	10	3	-	-	1.0905	2.0194	88.83
						●											1.2796	2.0194	90.37

¹⁾ With max. bore


Types of hubs type B ¹⁾



Type 1.0
with feather keyway
and setscrew



Type 2.1
clamping hub
single slot with
feather keyway




Type 8.0
taper interference fit


Type 8.1
cylindrical
interference fit

¹⁾ Dimensions and type may differ depending on size, other types of hubs on request


Displacements

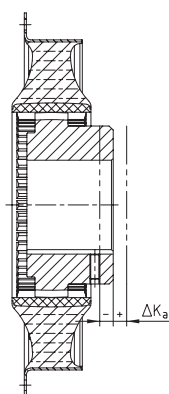

Axial displacement

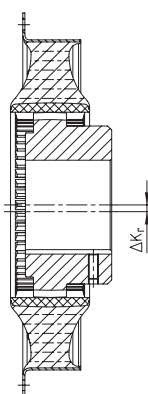

Radial displacement

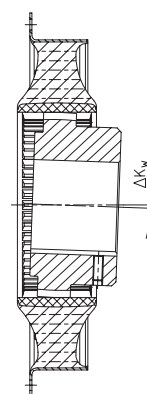

Angular displacement

SINULASTIC® B size		20	38	53	140	180
Perm. axial displacement ΔK _a [mm]		±2	±3.0	±3.0	±4.0	±4.0
Perm. radial displacement ΔK _r [mm]	1500 rpm	0.8	1.1	1.1	1.5	1.5
	n _{max.}	0.6	0.8	0.8	1.1	1.1
	max. ¹⁾	1.6	2.2	2.2	3.0	3.0
Perm. angular displacement ΔK _w [degree]	1500 rpm	1.0	0.8	0.8	0.6	0.6
	n _{max.}	0.7	0.6	0.6	0.4	0.4
	max. ¹⁾	2.0	1.6	1.6	1.2	1.2


¹⁾ With assembly for a short time resp. rarely with downtime or start-up operation as well as exceptional load conditions.

Ordering example:	SINULASTIC® 53	B	M	14	1.3	DIN 5480 - 60x2x28
	Coupling size	Type	Elastomer hardness	Flange ØDA acc. to SAE or special	Hub type	Finish bore

SINULASTIC® V



highly flexible flange coupling

radially mountable disk coupling



Components

Type V specifies a radially replaceable type for not flange-mounted drives set up freely

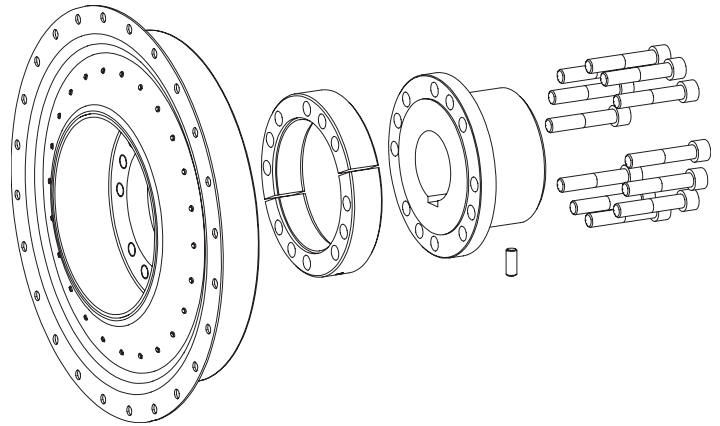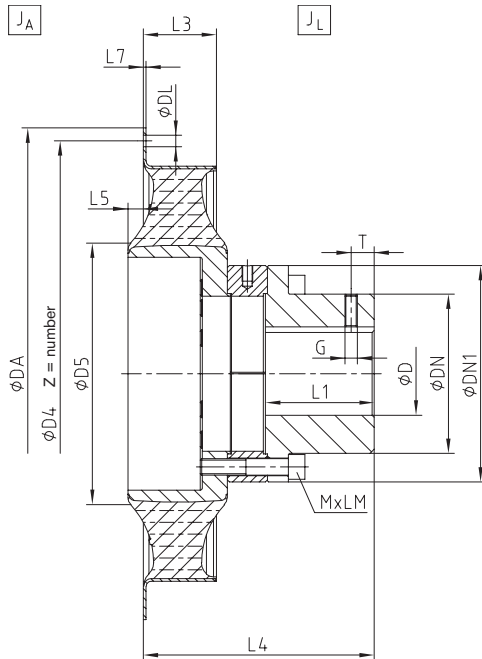

Flange dimensions according to SAE J620 [mm]				
Nominal size	DA	D4	Z	DL
11 1/2"	352.42	333.37	8	11
14"	466.72	438.15	8	13
18"	571.50	542.90	6	17
21"	673.10	641.35	12	17
24"	733.42	692.15	12	21
Ø475	475	450	12	11

Technical data													
Size	Elastomer type	Torque [Nm] ¹⁾				Dynamic torsion spring stiffness C _{dyn} [Nm/rad]		Relative damping ψ [-]		Perm. damping power P _{KW} [W] ²⁾		Operating speed [rpm]	
		T _{KN}	T _{Kmax}	T _{Kmax1}	T _{KW}	30 °C	60 °C	30 °C	60 °C	30 °C	60 °C	n	n _{max}
20	SN	1750	2625	5250	700	7200	5760	1.00	0.80	210	126	3240	3600
	MN	2000	3000	6000	800	11500	9200	1.10	0.90	240	144	3240	3600
	HN	2500	3750	6200	1000	18500	14800	1.30	1.10	270	162	3420	3800
38	SN	3000	4500	9000	1200	14500	11600	1.00	0.80	275	165	2880	3200
	MN	3800	5700	9600	1520	22000	17600	1.10	0.90	300	180	2880	3200
	HN	4600	6900	9600	1840	34000	27200	1.30	1.10	330	198	3240	3600
53	SN	4000	6000	12000	1600	17000	13600	1.00	0.80	285	171	2700	3000
	MN	5300	7950	14400	2120	28000	22400	1.10	0.90	325	195	2700	3000
	HN	6200	9300	14400	2480	43500	34800	1.30	1.10	370	222	3060	3400
140	SN	12000	18000	36000	4800	106000	84800	1.00	0.80	540	324	2160	2400
	MN	14000	21000	42000	5600	149000	119200	1.10	0.90	550	330	2160	2400
	HN	16200	24300	48600	6480	235000	188000	1.30	1.10	570	342	2520	2800
180	SN	14600	21900	43800	5840	132000	105600	1.00	0.80	620	372	2160	2400
	MN	18000	27000	54000	7200	185000	148000	1.10	0.90	630	378	2160	2400
	HN	22000	33000	66000	8800	295000	236000	1.30	1.10	650	390	2340	2600

¹⁾ T_{KN} Torque that can be constantly transmitted over the entire speed range.
T_{Kmax} Transient torque peaks (e. g. resonance passage), min. 100,000 load alternation pulsating / 50,000 load alternation vibratory
T_{Kmax1} Torque loads rarely, min. 1,000 load alternation
For selection consider DIN 740 part II (operating factor, temperature factor), parameters for an ambient temperature of 30 °C.
²⁾ Here permanent damping power. Twice the damping power figure is permissible for one hour.

SINULASTIC® type V																					
Size	Max. bore D [mm]	Flange connection acc. to SAE - J620						Dimensions [mm]											Mass moment of inertia [kgm ²] ¹⁾		Weight [kg] ¹⁾
		11 ½"	14"	18"	21"	24"	Ø475	DN	DN1	D5	L1	L3	L4	L5	L7	MxLM	G	T	J _A	J _L	
20	70	●						100	145	145	75	60	196	8.5	2	M12x90	M10	20	0.0625	0.0634	15.900
			●																0.1114	0.0594	
38	110		●					154	209	245	100	52	205	10	2.5	M16x90	M16	40	0.1524	0.2380	29.777
				●															0.1576	0.2275	
							●												0.2655	0.2275	30.173
			●															0.1888	0.2733	33.369	
53	110			●				154	209	247	105	70.5	229	15	2.5	M16x90	M16	40	0.1942	0.2672	32.239
							●												0.3020	0.2672	
140	165				●			235	300	431	200	81	314	10	3	M20x80	-	-	0.8816	2.2675	97.598
						●													1.0724	2.2675	
180	165				●			235	300	431	200	101	334	10	3	M20x80	-	-	1.0905	2.3956	104.973
						●													1.2796	2.3956	

KTR Germany:

Headquarters:

KTR Systems GmbH
Carl-Zeiss-Straße 25
D-48432 Rheine
Phone: +49 5971 798-0
Fax: +49 5971 798-698 or 798-450
E-mail: mail@ktr.com
Internet: www.ktr.com

KTR Brake Systems GmbH

Competence Center for Brake Systems
Zur Brinke 14
D-33758 Schloß Holte-Stukenbrock
Phone: +49 5207 99161-0
Mobile: +49 175 2650033
Fax: +49 5207 99161-11

Leiter Vertrieb Bremsen Wind

Jörn Edzards, Dipl.-Ing. (FH)
Zur Brinke 14
D-33758 Schloß Holte-Stukenbrock
Phone: +49 5207 99161-0
Mobile: +49 175 2650033
E-mail: j.edzards@ktr.com

Leiter Vertrieb Bremsen Industrie

Thomas Wienkotte, Dipl.-Ing. (FH)
Peter-Schumacher-Straße 102
D-50171 Kerpen
Phone: +49 2237 971796
Mobile: +49 172 5859448
E-mail: t.wienkotte@ktr.com

KTR Thinktank

Walder Strasse 53
40724 Hilden
Germany
Phone: +49 5971 798-885 / 886
E-mail: thinktank@ktr.com

Außendienst Norddeutschland für Hydraulik-Komponenten

Gunnar Ehlers
Finkenstieg 4b
21629 Neu Wulmstorf
Mobile: +49 174 3301536
E-mail: g.ehlers@ktr.com

Außendienst Bayern, Baden-Württemberg und Österreich für Hydraulik-Komponenten

Klaus-Peter Sprödhuber
Hussengutstr. 55
95445 Bayreuth
Phone: +49 921 16388991
Mobile: +49 172 1096496
E-mail: k.sproedhuber@ktr.com

Schleswig-Holstein, Nord-Niedersachsen, Hamburg, Bremen

Martin Lau, Maschinenbautechniker
KTR Ingenieurbüro Hamburg
Geschwister-Scholl-Allee 44
25524 Itzehoe
Phone: +49 4821 4050812
Mobile: +49 172 5310014
E-mail: m.lau@ktr.com

NRW: Großraum Düsseldorf, Köln, Aachen

John Wein,
B. Sc. Wirtschaftsingenieurwesen
KTR Ingenieurbüro Hilden
Walder Str. 53
40724 Hilden
Mobile: +49 151 62489605
E-mail: j.wein@ktr.com

Emsland, Mitte- und Süd-Niedersachsen, Ostwestfalen

Rainer Lüttmann
KTR Systems GmbH
Carl-Zeiss-Straße 25
48432 Rheine
Phone: +49 5971 798-340
Mobile: +49 172 5322164
E-mail: r.luettmann@ktr.com

Siegerland

René Szabo, Maschinenbautechniker
Waldstr. 67
57080 Siegen-Niederschelden
Phone: +49 5971 798 7777
Mobile: +49 175 81 64 844
E-mail: r.szabo@ktr.com

Ruhrgebiet, Hessen-Nord

René Pottmann, Maschinenbautechniker
KTR Ingenieurbüro Dortmund
Lindemannstraße 9
44137 Dortmund
Phone: +49 231 91259060
Mobile: +49 162 2186045
E-mail: r.pottmann@ktr.com

Hessen, Rheinland-Pfalz, Saarland

Martin Dietrich, Ingenieur Maschinenbau
KTR Ingenieurbüro Frankfurt
Schorbachstr. 9
35510 Butzbach
Phone: +49 6033 9248494
Mobile: +49 172 5329968
E-mail: m.dietrich@ktr.com

Berlin, Mecklenburg-Vorpommern Südost, Sachsen-Anhalt, Brandenburg

Thüringen Nord, Sachsen
Norman Schlag, Tech. BW (IHK)
KTR Ingenieurbüro Leipzig
Hauptstraße 101
04416 Markkleeberg
Phone: +49 341 35416467
Mobile: +49 173 4716266
E-mail: n.schlag@ktr.com

Baden-Württemberg Nord

Eberhard Maier, Dipl.-Ing. (FH)
Hortensienweg 1
70374 Stuttgart, Sommerain
Phone: +49 71 16 5842957
Mobile: +49 172 5355056
E-mail: e.maier@ktr.com

Baden-Württemberg Süd

Jochen Glöckler, Maschinenbautechniker
KTR Ingenieurbüro Balingen
Hölzlestraße 44
72336 Balingen
Phone: +49 7433 91381
Mobile: +49 172 5310049
E-mail: j.gloeckler@ktr.com

Bayern-Nord, Thüringen Süd

Alexander Ennulat, Dipl.-Ing.
KTR Ingenieurbüro Römerstein
Grabenstetter Str. 28
72587 Römerstein
Phone: +49 7382 9369226
Mobile: +49 162 4160354
E-mail: a.ennulat@ktr.com

Bayern-Süd, Baden-Württemberg Ost

Peter Benkard, Dipl.-Ing. (FH)
KTR Ingenieurbüro Adelsried
Am Mittelfeld 13
86477 Adelsried
Phone: +49 8293 9605-04
Mobile: +49 172 5313059
E-mail: p.benkard@ktr.com

For all representatives and sales partners please refer to www.ktr.com.

KTR worldwide:

Algeria

KTR Algérie
Algeria Business Center -
Pins Maritimes
DZ-16130 Alger Mohammadia
Phone: +213 661 92 24 00
E-mail: ktr-dz@ktr.com

Brazil

KTR do Brasil Ltda.
Rua Jandaia do Sul 471 -
Bairro Emiliano Perneta
Pinhais - PR - Cep: 83324-040
Phone: +55 41 36 69 57 13
E-mail: ktr-br@ktr.com

Chile

KTR Systems Chile SpA
Calle Bucarest 17
Oficina 33 Providencia
Santiago de Chile
Phone: +56 23 22 46 674
Mobile: +56 9 44 75 57 02
E-mail: ktr-cl@ktr.com

China

KTR Power Transmission Technology
(Shanghai) Co. Ltd.
Building 1005, ZOBON Business Park
999 Wangqiao Road
Pudong
Shanghai 201201
Phone: +86 21 58 38 18 00
Fax: +86 21 58 38 19 00
E-mail: ktr-cn@ktr.com

Czech Republic

KTR CR, spol. s r.o.
Brněnská 559
569 43 Jevíčko
Czech Republic
Phone: +420 461 325 014
E-mail: ktr-cz@ktr.com

Denmark

KTR Systems Danmark ApS
Vejlsevej 51, Bygning N
8600 Silkeborg
Phone: +45 39 39 10 50
E-mail: ktr-dk@ktr.com

Finland

KTR Finland OY
Tiistiniityntie 4
SF-02230 Espoo
Phone: +358 2 07 41 46 10
Fax: +358 2 07 41 46 19
E-mail: ktr-fi@ktr.com

France

KTR France SAS
5 Chemin de la Brocardière
CS 71359
F-69573 DARDILLY CEDEX
Phone: +33 4 78 64 55 26
Fax: +33 4 78 64 54 31
E-mail: ktr-fr@ktr.com

India

KTR Couplings (India) Pvt. Ltd.,
T-36 / 37 / 38, MIDC Bhosari
Pune 411026
Phone: +91 20 27 12 73 24
Fax: +91 20 27 12 73 23
E-mail: ktr-in@ktr.com

Italy

KTR Systems GmbH
Sede Secondaria Italia
Via Giovanni Brodolini, 8
I - 40133 Bologna (BO)
Phone: +39 051 613 32 32
Fax: +39 051 298 55 77
E-mail: ktr-it@ktr.com

Japan

KTR Japan Co., Ltd.
Toei Bldg.2F, 6-1-8 Motomachi-dori
Chuo-ku, Kobe
650-0022 Japan
Phone: +81 7 89 54 65 70
Fax: +81 7 89 54 65 75
E-mail: ktr-jp@ktr.com

Korea

KTR Korea Ltd.
#604, Songwon bldg., 89-10, Gal-
maejungang-ro, Guri-si, Gyeonggi-do,
11901 Korea
Phone: +82 3 15 69 45 10
Fax: +82 3 15 69 45 25
E-mail: ktr-kr@ktr.com

Netherlands

KTR Benelux B. V.
Postbus 87
Oosterveldsingel 3
NL-7558 PJ Hengelo (O)
Phone: +31 74 2553680
Fax: +31 74 2553689
E-mail: ktr-nl@ktr.com

Norway

KTR Systems Norge AS
Lahaugmoveien 81
N-2013 Skjetten
Phone: +47 64 83 54 90
Fax: +47 64 83 54 95
E-mail: ktr-no@ktr.com

Poland

KTR Polska Sp. z o.o.
ul. Czerwone Maki 65
PL-30-392 Kraków
Phone: +48 12 267 28 83
Fax: +48 12 267 07 66
E-mail: ktr-pl@ktr.com

Russia

KTR RUS LLC
6 Verhnii Pereulok 12
Litera A, Office 229
194292 St. Petersburg
Phone: +7 812 383 51 20
Fax: +7 812 383 51 25
E-mail: ktr-ru@ktr.com
Internet: www.ktr.ru

South Africa

KTR Couplings SA (Pty) Ltd.
28 Spartan Road, Kempton Park,
Spartan Ext. 21
Phone: +27 11 281 3801
Fax: +27 11 281 3812
E-mail: ktr-za@ktr.com

Spain

KTR Systems GmbH
Estartetxe, n° 5-Oficina 322
E-48940 Leioa (Vizcaya)
Phone: +34 9 44 80 39 09
Fax: +34 9 44 31 68 07
E-mail: ktr-es@ktr.com

Sweden

KTR Sverige AB
Box 7010
S-187 11 Täby
Phone: +46 86 25 02 90
E-mail: info.se@ktr.com

Switzerland

KTR Systems Schweiz AG
Bahnstr. 60
CH-8105 Regensdorf
Phone: +41 4 33 11 15 48
Fax: +41 4 33 11 15 56
E-mail: ktr-ch@ktr.com

Taiwan

KTR Taiwan Ltd.
No.: 30-1, 36 Rd
Taichung Industry Zone
Taichung City
407 Taiwan (R. O. C.)
Phone: +886 4 23 59 32 78
Fax: +886 4 23 59 75 78
E-mail: ktr-tw@ktr.com

Turkey


KTR Turkey
Güç Aktarma Sistemleri San. ve Tic. Ltd.
Şti.
Kayışdağı Cad. No: 117/2
34758 Atasehir -Istanbul
Phone: +90 216 574 37 80
Fax: +90 216 574 34 45
E-mail: ktr-tr@ktr.com

United Kingdom

KTR U.K. Ltd.
Robert House
Unit 7, Acorn Business Park
Woodseats Close
Sheffield
United Kingdom, S8 0TB
Phone: +44 11 42 58 77 57
Fax: +44 11 42 58 77 40
E-mail: ktr-uk@ktr.com

USA

KTR Corporation
122 Anchor Road
Michigan City, Indiana 46360
Phone: +1 219 872 91 00
Fax: +1 219 872 91 50
E-mail: ktr-us@ktr.com

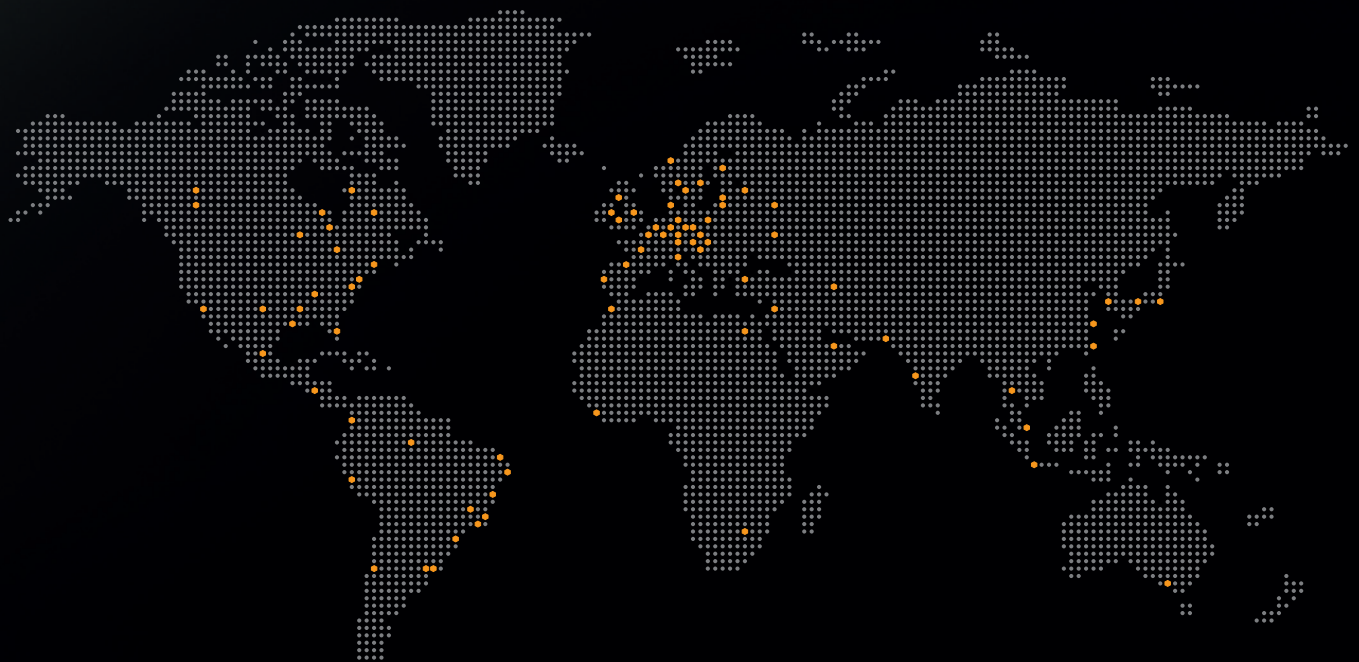



Headquarters

KTR Systems GmbH

Carl-Zeiss-Straße 25

D-48432 Rheine

Phone: +49 5971 798-0

Fax: +49 5971 798-698 or 798-450

E-mail: mail@ktr.com

Internet: www.ktr.com

Made for Motion



Certificates and Approvals

Being one of the first companies in the field of drive technology, KTR was certified in accordance with DIN EN ISO 9001 already in 1993, including the plants in Poland, China, India and USA.

Currently KTR products have been approved by numerous internationally renowned societies for standardization and classification. Individual approvals by other societies can be implemented on request without fail.



Lloyd's Register



Legend of pictograms



Torsionally stiff




Light-weight



Maintenance-free



Torsionally flexible




Axial compensation



Protected against corrosion



Highly flexible




Angular compensation



Electrically insulating



Damping vibrations



Radial compensation



Maximum speed



Axial plug-in



Shiftable at standstill



No eddy current losses



Consider shaft distance




Double-cardanic



Torque limiter slipping




Relatively short shaft distance



Radial disassembly, ease of service



Torque limiter with synchronous ratching



Maximum operating temperature



Standard drop-out center length



Torque limiter with idle rotation type



High speeds



Available in accordance with API



Hardened surface



Backlash-free



Complying with ATEX
For details refer to our ATEX leaflet



Accuracy X %



Shear type, separating, slipping



Certified in accordance with ABS



Consider axial displacement



Additional features compared to standard version