



INTRODUCING A NEW HYBRID – **THE PELI™ 9050**

PELI™ 9050 | [PELIPRODUCTS.CO.UK](http://PELIPRODUCTS.CO.UK)

# AN INDUSTRY FIRST


The new 9050 is the next generation of Peli High Performance lighting.



The 9050 includes industry first technology – The flexible “Dual Fuel” battery system allows you to select between Rechargeable Li-ion, AA alkaline or AA NiMH cells.

This class-leading LED also features dedicated full-time Flood or Spot modes, without the use of light-diminishing diffusers.


True differentiation between remote area task, and powerful search lighting is available in one compact and lightweight product, all at the touch of a button.

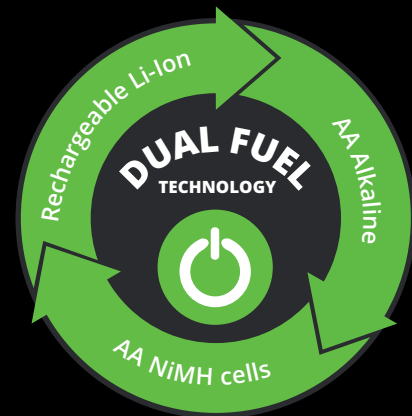


# VERSATILE ILLUMINATION

Switch between dedicated light Flood/Spot light modes to transform your 9050, providing up to 3369 Lumens – depending on the task and environment.


(Lumens and Beam Distance when using 2 x Li-Ion batteries)



**FLOOD MODE:**  
47 METERS  
1119 LUMENS



**SPOT MODE:**  
489 METERS  
2623 LUMENS

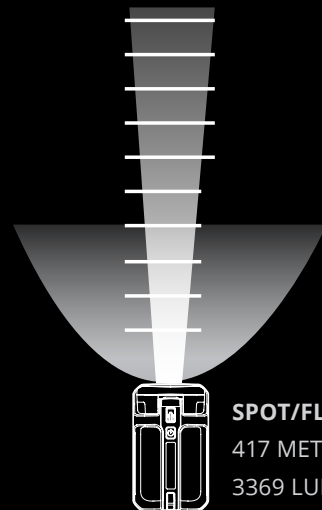

**SPOT/FLOOD MODE:**  
417 METERS  
3369 LUMENS






# SIMPLIFIED DOCKING


The 9050 features a quick-release charger base. A click sound verifies the fast & hassle free dismounting and re-mounting of the light.



# ADAPTIVE LIGHTING



112.5°



Vertical position  
for downward beam  
lighting option

The 9050 directs light accurately, wherever and whenever you need it.





Combine with a tripod (available separately) and rotate through 112.5°.

With a sturdy base in vertical mode, place on a flat surface and angle the light head to provide perfect downward illumination.

# WATERPROOF



The 9050 is waterproof with an IP67 rating, allowing you to keep the job illuminated through wet working conditions.

FL1 STANDARDS SPECIFICATIONS	BATTERIES Li-Ion	SPOT		FLOOD		SPOT/FLOOD	
		HIGH	LOW	HIGH	LOW	HIGH	LOW
 <b>LIGHT OUTPUT</b> (Lumens)	2/3/4	2650	354	1119	291	3388	301
 <b>BEAM DISTANCE</b> (Metres)	2/3/4	490	117	48	24	419	110
 <b>BEAM INTENSITY</b> (Candelas)	2/3/4	59760	7846	577	149	43824	3011
 <b>RUN TIME</b> (hours/mins)	2	4h 15m	13h 30m	5h 30m	11h	2h 45m	11h
	3	7h 30m	20h	8h 45m	16h	4h 30m	16h
	4	9h 30m	26h	12h	20h	6h	20h

Full Recharge Time: 2 batteries – 5h 30m, 3 batteries – 7h 30m, 4 batteries – 10h.



## Peli Products (UK) Ltd

Peli House, Peakdale Road, Brookfield, Glossop SK13 6LQ T: 01457 869999 E: sales@peliproductions.co.uk

©2022 Peli Products (UK) Ltd. All contents included should be considered as guidelines and only valid at the time of publication.

All trademarks and logos displayed herein are registered and unregistered trademarks of Peli Products, S.L.U. and others.

