







DESCRIPTION

The WTD video wall solutions are created and designed for vertical market applications, such as shopping center, financial, educational, terminals information.

They can employ also with high quality interactive touch screen, with excellent response time and until 32 points touch, with a nice truly flat front surface and narrow border.

The high grade LCD panels deliver high-resolution and high clarity images.

Their LED backlights not only prolong the work life, but also decrease power consumption and module weight.

The single panels are created with a special narrow border to get the possibility to install them so near between them that it will seems to watch an only single interactive wall.

They employ special panels design with high technical performances to support a front impact for the outdoor employ and a nice look such as narrow border realized also to prevent the entry of the dust and water resistant for the outdoor versions.

These video wall solutions can be installed with multiple mounting options configurations.

The single panels are everyone with CE / FCC / CCC approvals.

KEY FEATURES



Design

The appearance of the panels employed by WTD company meets the needs of any player in the world for these special interactive wall configurations solutions.



Visual Impact

They have an sleek design, offering wide viewing angles and clear, crisp images, which not only brings customers a stronger visual impact, thanks also to the narrow border panels.



MultiTouch Function

The multiple different touch technologies allows the use of joint operations of most of the display areas.



Touch Mode by the user

The touch screens employed have excellent clarity; they respond to contact with any type of object.



Standard Application

The major applications are on the public area or financial solutions.



Grade panels

High commercial grade panels are used to ensure reliability and longevity of the panel.

APPLICATIONS

- Public Area
- Financial
- Shopping centerInformation terminal







MODEL	VWP-460N	VWP-550N	SPLITTER
Display Size	46"	55"	
Active Display Area(H x V)	1018.08x572.67 mm	1210x680.8 mm	
Aspect Ratio	16:9	16:9	
LCD Technology	LED	LED	
Native Resolution	1920x1080	1920x1080	
Resolution Input			800x 600,1024x 768,1152x 864, 1280x 768,1280x 960,1280x 1024, 1600x 1200,1680x 1050,1920x 1200
Resolution Output			1024 x 768, 1360 x 768 1280 x 1024, 1400 x 1050, 1600 x 1200, 1680 x 1050, 1920 x 1200
Rear Panel (2x2)			Input: 1 x DVI-I single-link input Output: 4 x DVI-D single-link output
Rear Panel (3x2) (3x3)			Input: 1 x DVI-I single-link input Output: 9 x DVI-D single-link output
Colour	16.7 million	16.7 million	
Brightness	700 cd/ m2	450 cd/ m2	
Viewing Angle	178°/178°	178°/178°	
Contrast Ratio	3500:1	3500:1	
Life Span	50000 H	60000 H	
Response Time	5ms	≤6ms	
Pixel Pitch (H x V)	0.53x0.53	0.53x0.53	
Service Access	Front/Rear Side	Front/Rear Side	
Color Temperature	10000K	10000K	
Processing	16 bit	16 bit	
Frame Rate	50/60 fps	50/60 fps	
Cooling	Passive cooling system (on-board fans can be activated if required)	Passive cooling system (on-board fans can be activated if required)	
Bezel	5.5mm	5.5mm	
Power Supply	AC 100-240V,50/60 Universal,±10%	AC 100-240V,50/60 Universal,±10%	Ext.: 100-240 VAC, 50-60 Hz Input: +12VDC ±5%
Power Consumption (Max)	180W	240W	20W
Weight (Single) (Appr.)	15 Kg.	30 Kg.	
Dimension (Net)	1023.98x578.57 mm	1215.3x686.1 mm	TBD
Multibox Carton Dimension	TBD	TBD	TBD
Q.ty Multibox	1	1	1
Enclosure Color			
Other Feature	-	-	-
Mounting (Option)	-	-	-
Accessories	-	-	-
Warranty	2 Years (Panel 1 Year)		
Agency Approval	CE - FCC - CCC		
MTBF		a statistical sample and is not intende TBF is not, and should not be construe	· -



2x2 WALL BRACKETS 46'

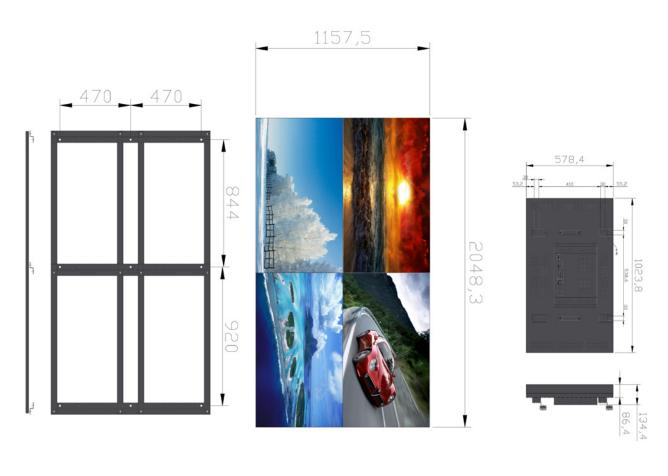





3x2 FLOOR BRACKETS WHEEL 46'











3x2 CABINET BRACKETS SOLUTION 46'

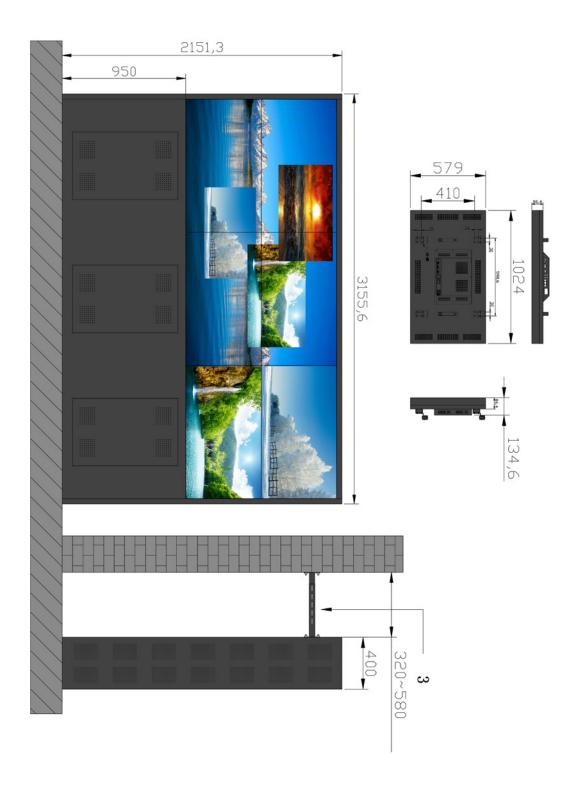




3x3 CABINET BRACKETS SOLUTION 46'

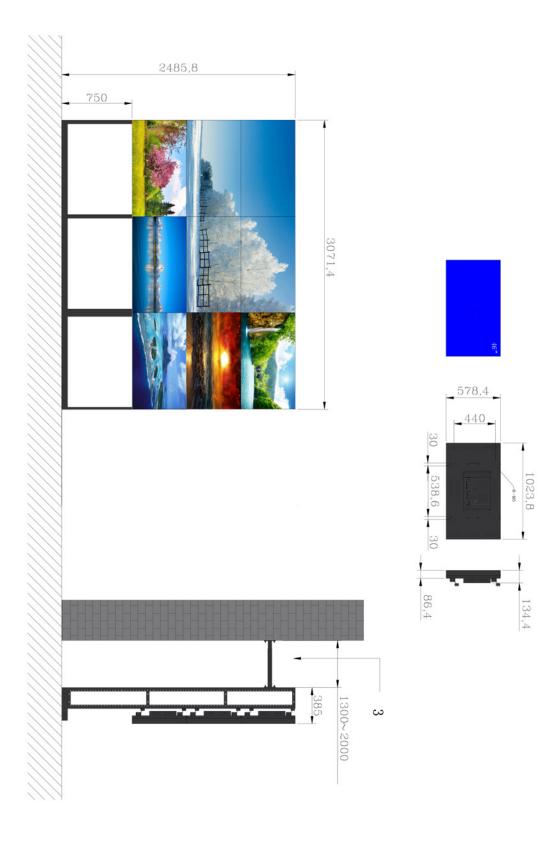





4x3 CABINET BRACKETS SOLUTION 46'

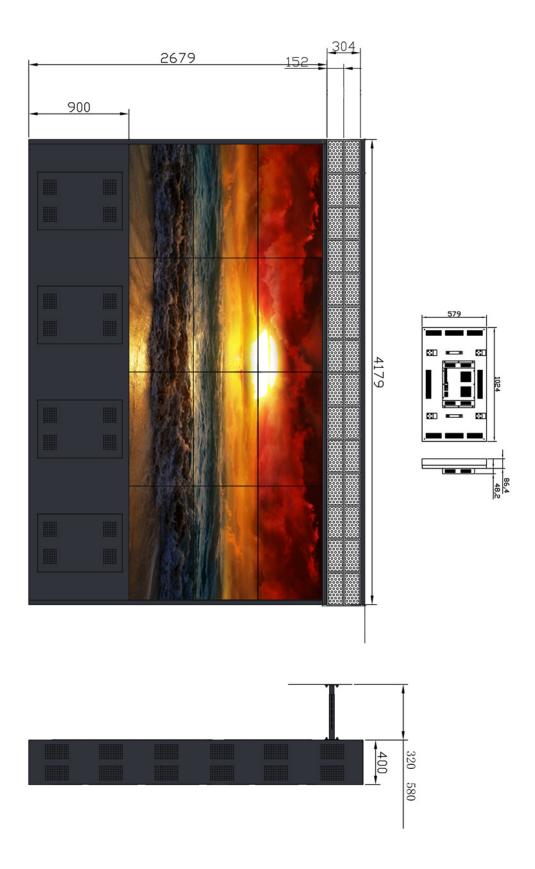



4X4 CABINET BRACKETS SOLUTION 46'

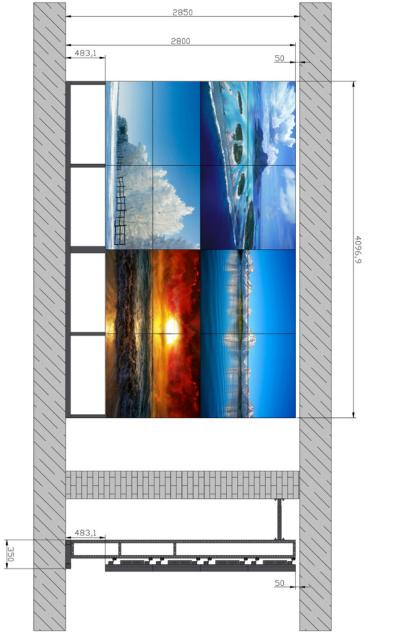





5x4 CABINET BRACKETS SOLUTION 46'

