

ULTRA-ZONE™




Forced Air Zone Controls

SUBMITTAL SHEET

Model ND-RSD
Rectangular Spring-Return Damper

Model ND-RSD is a rectangular parallel blade damper constructed from heavy duty extruded aluminum with nylon bearings for quiet operation. The Motor Actuator is a 24 VAC Synchronous motor that draws 6 watts / 8 VA. It is Power Closed / Spring Open (standard). The damper can be ordered as Power Open / Spring Close. *The Model ND-RSD can not be field-reversed.* The Model ND-RSD also has a Travel Limiter to allow Supply Air leakage. See reverse for Wiring Solutions.

DIMENSIONAL DRAWINGS

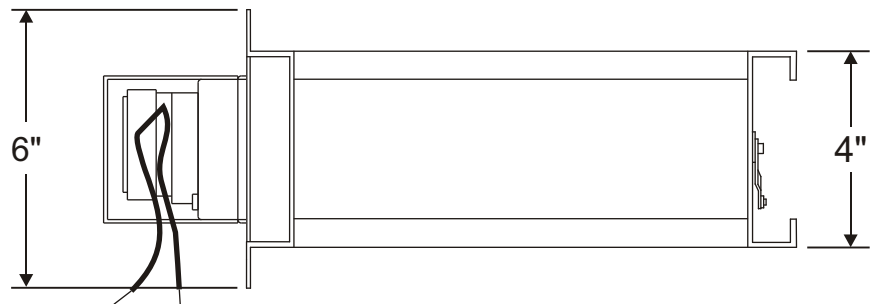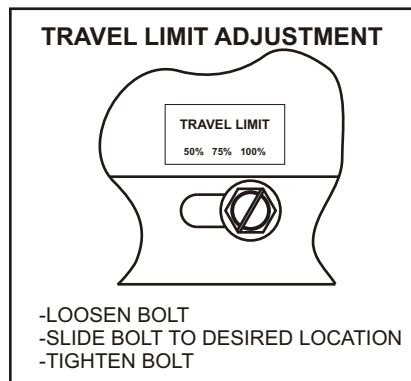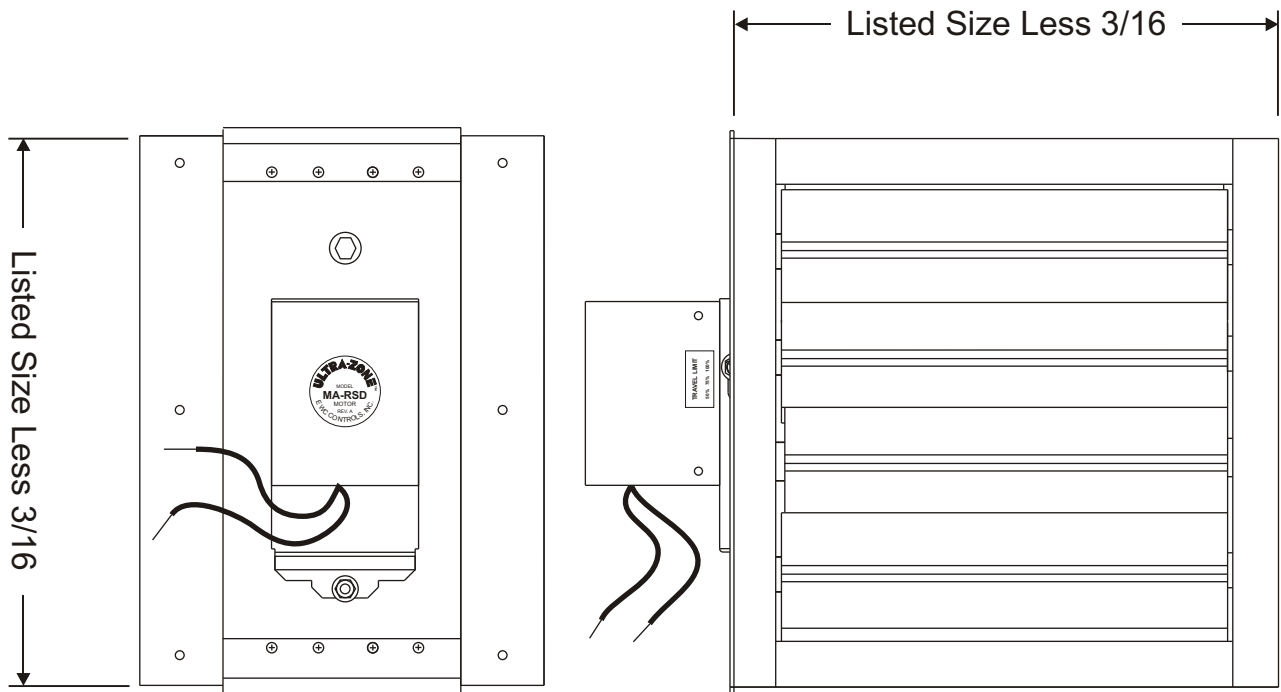

Excellence Without Compromise

EWC®
CONTROLS INC.

385 Hwy. 33 Englishtown, NJ 07726
Ph: 800-446-3110 - Fx: 732-446-5362

P/N 090377A0132 REV. B Copyright © EWC Controls 2007 All Rights Reserved

ULTRA-ZONE™

Forced Air Zone Controls

SUBMITTAL SHEET

Model ND-RSD
Rectangular Spring-Return Damper
Insertion Mounting

Cut a 4" slotted opening in one side of the duct and slide the damper in. Secure the damper to the duct with the supplied sheet metal screws. Larger sizes may require additional support by securing the back of the damper as well. If using duct board, additional support can be obtained by using Model DBA Duct Board Adaptors.

WIRING SOLUTIONS

MOTOR Terminal Output

M6 - power to close
M4 - power to open
M2 - constant power
M1 - common

Wiring to a Control Panel

MODEL
MA-RSD


Motor

ZONE
PANEL

M6
M4
M2
M1


*DAMPER SHOWN AS POWER CLOSE/SPRING OPEN MODEL
IF POWER OPEN/SPRING CLOSE MODEL WIRE TO M4 TERMINAL.

Wiring a Thermostat to Control a Single Damper

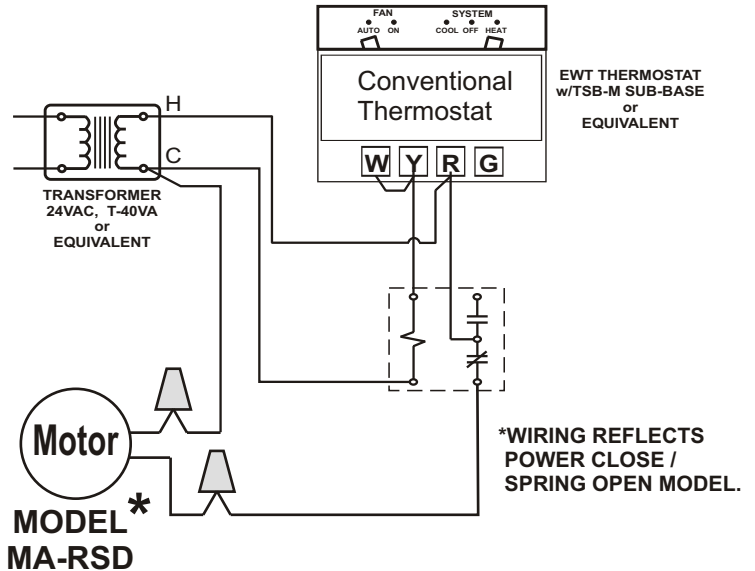

Wiring in Parallel

*DAMPERS SHOWN AS POWER CLOSE/SPRING OPEN MODELS
IF POWER OPEN/SPRING CLOSE MODELS WIRE TO M4 TERMINAL.

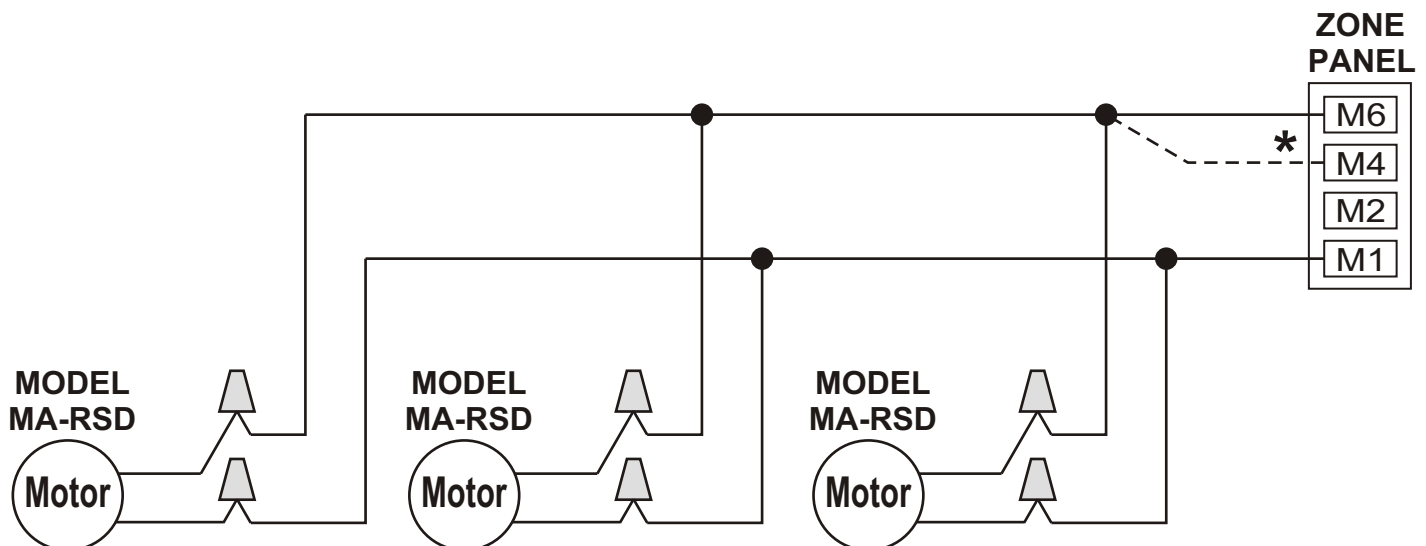

Excellence Without Compromise

EVC®
CONTROLS INC.

385 Hwy. 33 Englishtown, NJ 07726
Ph: 800-446-3110 - Fx: 732-446-5362

P/N 090377A0132 REV. B Copyright © EVC Controls 2007 All Rights Reserved