


## QT6100 QwikSwap™

### Universal Constant Torque ECM Blower Motor Replacement

#### An Aftermarket ECM Constant Torque Motor Replacement


- ▶ Direct OEM Replacement when combined with any Permanent Split Capacitor (PSC) motor (120 & 208-230 VAC)
- ▶ Provides Variable Blower Air Flow (known to improve performance)
- ▶ QwikSwap™ automatically selects the best blower speed (Low, Med or High) every time the unit cycles on.
- ▶ Provides Improved Humidity Removal (56% improvement at 82°F outdoor air temp, 157% at 97°F outdoor air temp)
- ▶ No need to wait for the OEM motor to be ordered
- ▶ No motor programming required
- ▶ Replaces all OEM Constant Torque Motors 1/3 to 1 HP
- ▶ Replaces X13® and SelecTech® Constant Torque ECM motors
- ▶ Quickly wired using existing OEM motor connection
- ▶ Patent-Pending High Efficiency Design with smooth quiet speed changes
- ▶ 6,000 Amps, 100 Joules Surge Protection
- ▶ Electronics fully conformal coated to protect from moisture
- ▶ At 82°F outdoor air temperature, improves EER by 4.8 to 6.6%\*
- ▶ At 97°F outdoor air temperature, improves EER by 2.1 to 5.2%\*

\*Range depends on model tested, for 80% efficient ECM motor and 60% efficient PSC motor, 5 ton system, 80°F indoor air.

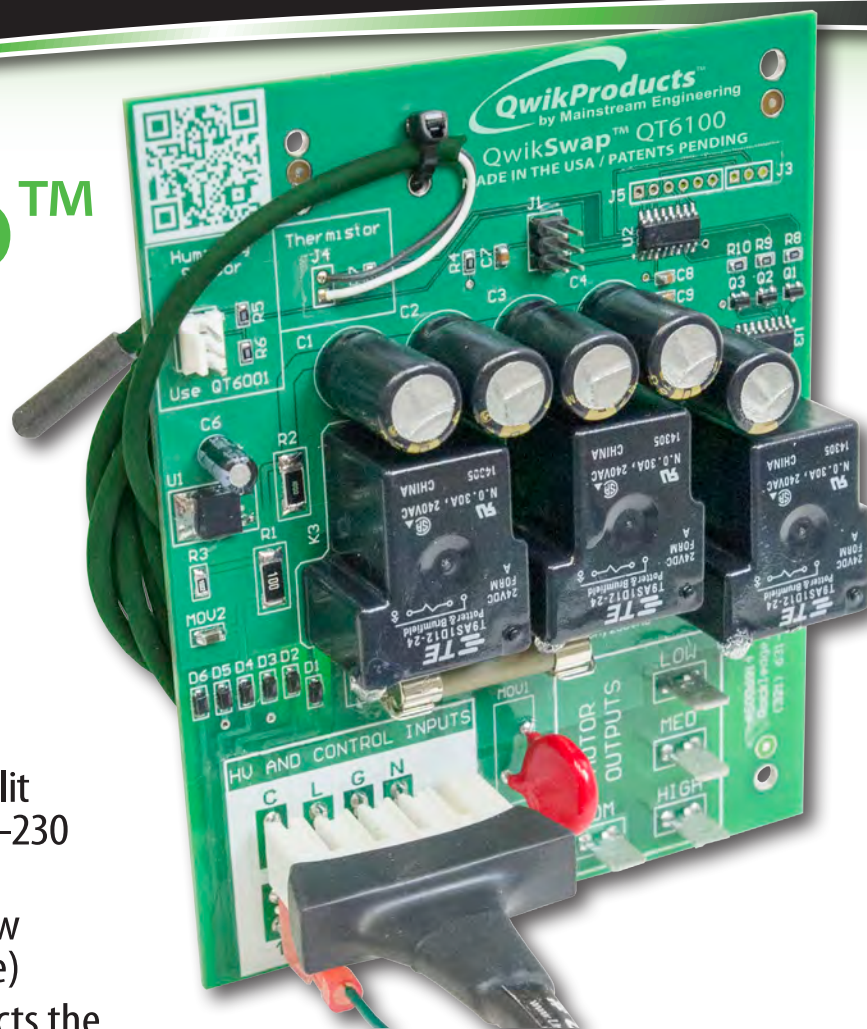

## QT6100 QwikSwap™ Universal Constant Torque ECM Blower Motor Replacement

**Simplified Installation Instructions** (Fully detailed instructions are included with packaging)

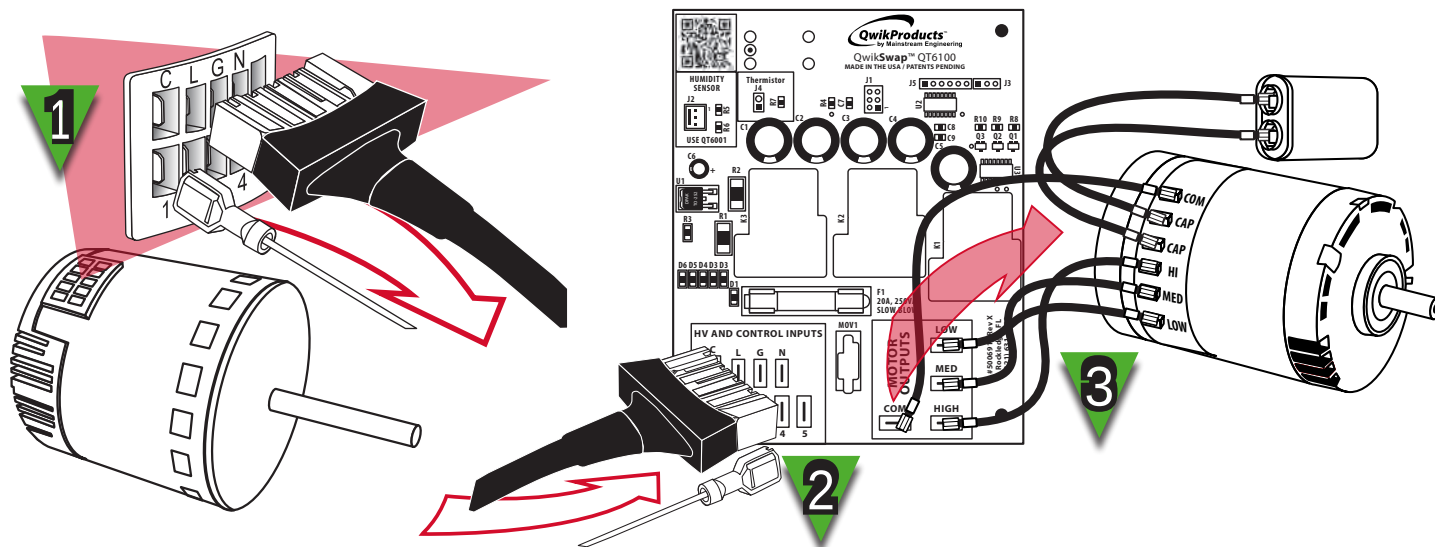

| QT6100 QwikSwap™ Specifications |                        |
|---------------------------------|------------------------|
| Input Voltage                   | 115 VAC or 208-230 VAC |
| Maximum Steady-State Current    | 20 Amps                |
| Maximum Blower Hp               | 1 Hp                   |
| Frequency                       | 50 - 60 Hz             |
| Fuse Rating                     | 20 Amps Time Delay     |
| Surge Suppression               | 6,000 Amps, 100 Joules |
| Size / Dimensions               | 4.3" x 5.3"            |
| Supported Accessories           | QT6001 Humidity Sensor |

For more details or information about **QwikSwap™** visit [www.qwik.com](http://www.qwik.com)

All marks shown within this document are properties of their respective owners, X13® is a registered Trademark of Regal Beloit and SelecTech® is a registered trademark of Nidec Motor Corporation. QwikProducts™ and QwikSwap™ are trademarks of Mainstream Engineering Corporation. Rockledge, Florida 32955, (321) 631-3550 • All QwikProducts™ are made in the USA. **Patent Pending**

