

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.



PUMP COMPANY

Zoeller Family of Water Solutions™

MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347
SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961
(502) 778-2731 • 1 (800) 928-PUMP • FAX (502) 774-3624

SECTION: 6.10.190

FM0432

0311

Supersedes

0801

visit our web site:
www.zoeller.com

REPLACEMENT PARTS LIST FOR MODELS:


M59 AUTOMATIC 115V
D59 AUTOMATIC 230V
N59 NONAUTOMATIC 115V
E59 NONAUTOMATIC 230V

Consult factory for all other models

TO ORDER REPLACEMENT PARTS:


PLEASE FURNISH THE FOLLOWING INFORMATION:

- Model Number.
- Part Number of Pump.
(If manufactured prior to June 1988, give 2 letter date code following Model No.)
- Part Number and Description of part.

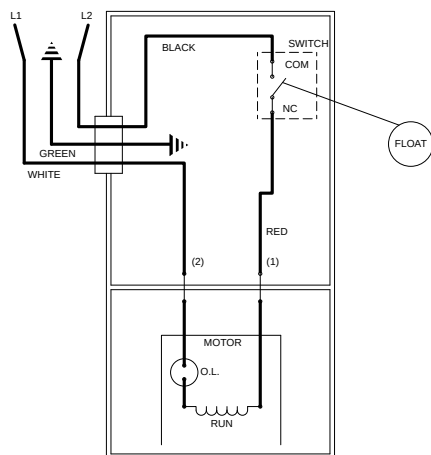


002385

WIRING DIAGRAM FOR MODELS
"M59-A" and "M59-B"
"D59-A" and "D59-B"
8/80 (UJ) thru 8/86 (US)

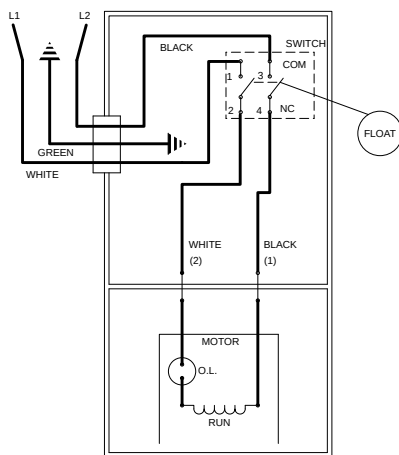

004619

WIRING DIAGRAM FOR MODELS
"M59-C", "M59-D" and "M59-E"
"D59-C", "D59-D" and "D59-E"
9/86 (VS) thru Current

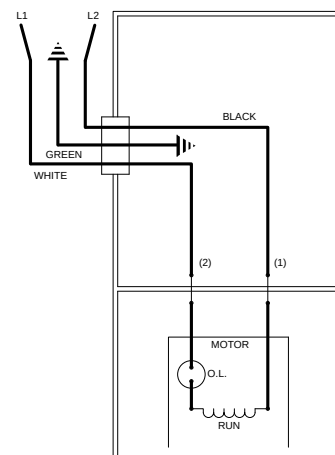

002392A

WIRING DIAGRAM FOR MODELS
"N59", "N59-A", "N59-B", "N59-C", "N59-D"
"E59", "E59-A", "E59-B", "E59-C", "E59-D"
8/80 (UJ) thru Current

REPLACEMENT PARTS LIST FOR MODELS "M59" and "D59".

See back page for "M59" and "D59" illustration

MODELS:				M59-A	M59-B	M59-C	M59-D	M59-E	D59-A	D59-B	D59-C	D59-D	D59-E
REF. NO.	DESCRIPTION	QTY	NOTES	8/80 UJ thru 12/80 YJ	1/81 MM thru 8/86 US	9/86 VS thru 8/87 UT	9/87 VT thru 6/92	7/92 thru Current	8/80 UJ thru 12/80 YJ	1/81 MM thru 8/86 US	9/86 VS thru 8/87 UT	9/87 VT thru 6/92	7/92 thru Current
1	• Gasket, Case/Cover	1		034046	034046	034046	034046	034046	034046	034046	034046	034046	034046
2	• Clamp, Strain Relief-#2F	1		004200	004200	004200	004200	004200	004200	004200	004200	004200	004200
3	• Seal, Cord-Asm	1	2	054025	002326	004322	004322	004322	054025	002326	004322	004322	004322
4	Cord Term & Seal	1	2	054026	002321	004700	004700	004700	054057	002320	004707	004707	004707
5	Stator GE	1	1	054040	054040	054040	054040	007951	054050	054050	054050	054050	007952
	Stator Emerson	1	1	002473	002473	002473	002473	007953	005530	005530	005530	005530	007954
6	• Screw, #8-32 X 2.563 RHPI-Silbo	2		001914	001914	001914	001914	001914	001914	001914	001914	001914	001914
7	Rotor Asm GE	1	1	054032	054032	054032	054032	054032	054032	054032	054032	054032	054032
	Rotor Asm Emerson	1	1	003735	003735	003735	003735	003735	003735	003735	003735	003735	003735
8	• Seal, Mtr Hsg	1		034007	034007	034007	034007	034007	034007	034007	034007	034007	034007
9	• Washer, Trst-Nyl. 875X.504X.050"	1		002140	002140	002140	002140	002140	002140	002140	002140	002140	002140
10	Bearing, Sleeve-Lower Rotor	1		054024	054024	054024	054024	054024	054024	054024	054024	054024	054024
11	• Oil, Dielectric-(19 Oz Can)	1		002588	002588	002588	002588	002588	002588	002588	002588	002588	002588
12	Housing, Pump-&Brg Mach Br	1		059005	059005	059005	059005	059005	059005	059005	059005	059005	059005
13	• Seal Asm, Shaft-Blister Pak	1		267027	267027	267027	267027	267027	267027	267027	267027	267027	267027
14	Impeller Br "59"	1		059001	059001	059001	059001	059001	059001	059001	059001	059001	059001
15	Base Asm Br	1		059009	059009	059009	059009	059009	059009	059009	059009	059009	059009
16	Plate, Strainer-Plastic	1		001082	001082	001082	NA	NA	001082	001082	001082	NA	NA
17	Case Handle & Arm Br "50"	1	2	056092	056092	004714	004714	004714	056093	056093	004714	004714	004714
18	Case & Switch "50"	1	2,6	056051	056051	004711	004711	004711	056053	056053	004711	004711	004711
19	• Plug, Test-White	2		034090	034090	034090	034090	034090	034090	034090	034090	034090	034090
20	• Arm & Seal Asm "50"	1	2	054080	054080	004704	004704	004704	054080	054080	004704	004704	004704
21	Guard "97"	1	2	034016	034016	004645	004645	004645	034016	034016	004645	004645	004645
22	Switch Asm "50"	1	2	034061	034061	004705	004705	004705	034061	034061	004705	004705	004705
23	Wire Asm-F-P(1)Wire Rs2.25"Lg	1		002231	002231	NA	NA	NA	002231	002231	NA	NA	NA
24	Seal, Thru Wall Term Housing, Mtr-Brg&Term Br "50"	2		003402	003402	003402	003402	003402	003402	003402	003402	003402	003402
		1		059008	002517	004713	004713	004713	059008	002517	004713	004713	004713
25	Bearing, Upper Rotor	1		034052	034052	034052	034052	034052	034052	034052	034052	034052	034052
26	Float-Polypropylene	1		034019	034019	034019	034019	034019	034019	034019	034019	034019	034019
27	Rod Asm, Flt	1		054062	054062	054062	054062	054062	054062	054062	054062	054062	054062
28	Guide Asm, Flt Rod	1		034086	034086	034086	034086	034086	034086	034086	034086	034086	034086
29	• Screw, #10-24 X.75 RHM-SI SS	12		001885	001885	001885	001885	001885	001885	001885	001885	001885	001885
30	• Screw, #6-32x.439RHsltp"1"Stlgr	3		001877	001877	001877	001877	001877	001877	001877	001877	001877	001877
31	• Screw, #6-32x.25RHM SI Tc Stlgr	2		001877	001877	004644	004644	004644	001877	001877	004644	004644	004644
32	• Sem, 10-24x.375HH-SI Tc.688Wash	3		002000	002000	002000	002000	002000	002000	002000	002000	002000	002000
	Rebuild Kit "59"	1		057059	057059	004716	004716	004716	057059	057059	004716	004716	004716

• Items included in Rebuild Kit.

□ Not Shown in Illustration.

NOTES:

- Specify GE or Emerson Motor. GE motor can be identified by white valox insulation on stator. Emerson can be identified by green epoxy insulation on stator.
- To insure proper replacement, customer must identify if switch is a General Electric switch.
- See FM0160 Parts Price Sheet for listing of parts prices.
- "NA" indicates, not applicable.
- If an "X" follows Model No., or Date Mfg. on brass ID tag, consult factory for ordering any parts.
- For pumps with date code prior to 9/86, the replacement case & switch will have a new style switch.

DATE CODE OF MANUFACTURE FROM 12/70 to 12/88				
1st LETTER MONTH		2nd LETTER YEAR		
M -- JAN.	T -- JULY	A -- 1971	G -- 1977	O -- 1983
N -- FEB.	U -- AUG.	B -- 1972	H -- 1978	P -- 1984
O -- MARCH	V -- SEPT.	C -- 1973	I -- 1979	R -- 1985
P -- APRIL	W -- OCT.	D -- 1974	J -- 1980	S -- 1986
R -- MAY	X -- NOV.	E -- 1975	M -- 1981	T -- 1987
S -- JUNE	Y -- DEC.	F -- 1976	N -- 1982	U -- 1988
NOTE: Four digit (MMYY) date of mfg. used after June, 1988. IE: MMYY = 0192 = Jan. 1992.				


See back page for “N59” and “E59” illustration.

- Items included in Rebuild Kit. ⊠ Not Shown in Illustration.

- 1) Specify GE or Emerson Motor. GE motor can be identified by white valox insulation on stator. Emerson can be identified by green epoxy insulation on stator.
- 2) See FM0160 Parts Price Sheet for listing of parts prices.
- 3) "NA" indicates, not applicable.
- 4) If an "X" follows Model No., or Date Mfg. on brass ID tag, consult factory for ordering any parts.




REPLACEMENT PARTS ILLUSTRATION FOR MODELS "M59" AND "D59"

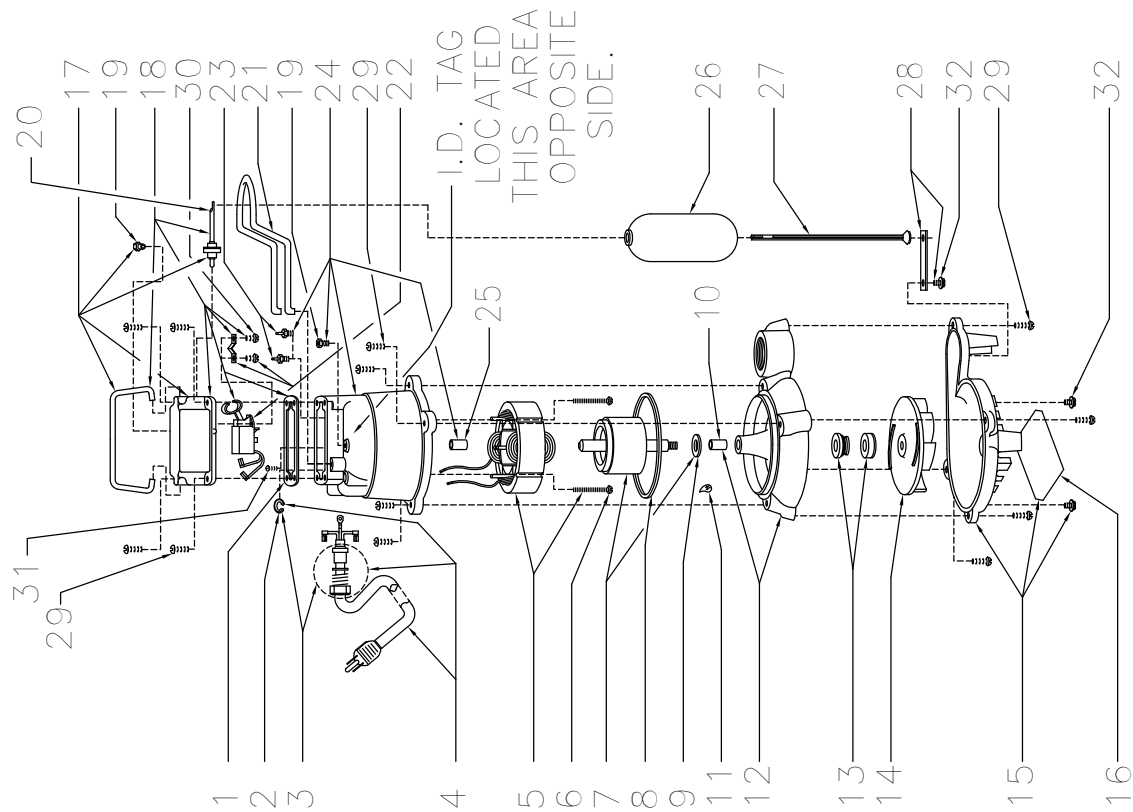

SK273

REPLACEMENT PARTS ILLUSTRATION FOR MODELS "N59" AND "E59"

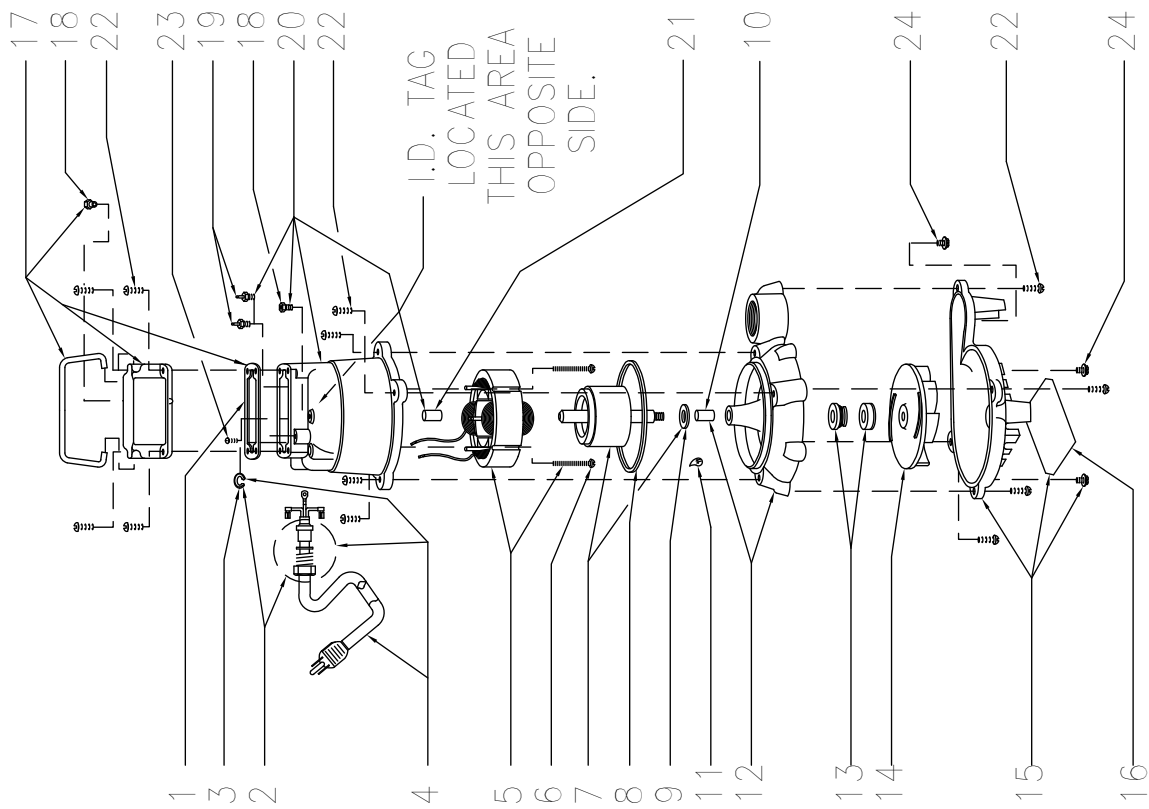

SK909