

Article No. : 6SL3210-1KE26-0UF1

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Figure similar



Rated data

Input	
Number of phases	3 AC
Line voltage	380 ... 480 V +10 % -20 %
Line frequency	47 ... 63 Hz
Rated current (LO)	53.00 A
Rated current (HO)	44.00 A

Output	
Number of phases	3 AC
Rated voltage	400V IEC 480V NEC ¹⁾
Rated power (LO)	30.00 kW 30.00 hp
Rated power (HO)	22.00 kW 25.00 hp
Rated current (LO)	58.00 A
Rated current (HO)	43.00 A
Rated current (IN)	58.00 A
Max. output current	87.00 A
Pulse frequency	4 kHz
Output frequency for vector control	0 ... 240 Hz
Output frequency for V/f control	0 ... 550 Hz

Overload capability	
Low Overload (LO)	150 % base load current IL for 3 s, followed by 110 % base load current IL for 57 s in a 300 s cycle time
High Overload (HO)	200 % base load current IH for 3 s, followed by 150 % base load current IH for 57 s in a 300 s cycle time

General tech. specifications	
Power factor λ	0.90 ... 0.95
Offset factor cos φ	0.99
Efficiency η	0.98
Sound pressure level (1m)	72 dB
Power loss	1,040.0 W
Filter class (integrated)	Unfiltered

Communication	
Communication	PROFINET, EtherNet/IP

Inputs / outputs

Standard digital inputs	
Number	6
Switching level: 0→1	11 V
Switching level: 1→0	5 V
Max. inrush current	15 mA

Fail-safe digital inputs	
Number	1

Digital outputs	
Number as relay changeover contact	1
Output (resistive load)	DC 30 V, 0.5 A
Number as transistor	1
Output (resistive load)	DC 30 V, 0.5 A

Analog / digital inputs	
Number	1 (Differential input)
Resolution	10 bit

Switching threshold as digital input	
0→1	4 V
1→0	1.6 V

Analog outputs	
Number	1 (Non-isolated output)

PTC/ KTY interface	
1 motor temperature sensor input, sensors that can be connected: PTC, KTY and Thermo-Click, accuracy ±5 °C	

Closed-loop control techniques

V/f linear / square-law / parameterizable	Yes
V/f with flux current control (FCC)	Yes
V/f ECO linear / square-law	Yes
Sensorless vector control	Yes
Vector control, with sensor	No
Encoderless torque control	No
Torque control, with encoder	No

Data sheet for SINAMICS G120C

Article No. : 6SL3210-1KE26-0UF1

Ambient conditions

Cooling	Air cooling using an integrated fan
Cooling air requirement	0.055 m³/s (1.942 ft³/s)
Installation altitude	1,000 m (3,280.84 ft)

Ambient temperature

Operation	-20 ... 40 °C (-4 ... 104 °F)
Transport	-40 ... 70 °C (-40 ... 158 °F)
Storage	-40 ... 70 °C (-40 ... 158 °F)

Relative humidity

Max. operation	95 % RH, condensation not permitted
----------------	-------------------------------------

Connections

Signal cable

Conductor cross-section	0.15 ... 1.50 mm² (AWG 24 ... AWG 16)
-------------------------	--

Line side

Version	screw-type terminal
Conductor cross-section	10.00 ... 35.00 mm² (AWG 8 ... AWG 2)

Motor end

Version	Screw-type terminals
Conductor cross-section	10.00 ... 35.00 mm² (AWG 8 ... AWG 2)

DC link (for braking resistor)

Version	Screw-type terminals
Conductor cross-section	10.00 ... 35.00 mm² (AWG 8 ... AWG 2)
Line length, max.	10 m (32.81 ft)
PE connection	Screw-type terminals

Max. motor cable length

Shielded	200 m (656.17 ft)
Unshielded	300 m (984.25 ft)

Mechanical data

Degree of protection	IP20 / UL open type
Frame size	FSD
Net weight	17.10 kg (37.70 lb)

Dimensions


Width	200 mm (7.87 in)
Height	472 mm (18.58 in)
Depth	237 mm (9.33 in)

Standards

Compliance with standards	UL, cUL, CE, C-Tick (RCM)
CE marking	EMC Directive 2004/108/EC, Low-Voltage Directive 2006/95/EC

Converter losses to IEC61800-9-2*

Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	53.8 %

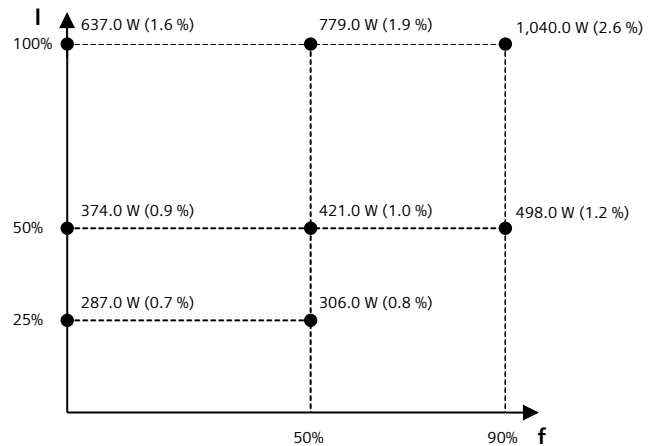

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

*converted values

¹⁾The output current and HP ratings are valid for the voltage range 440V-480V