
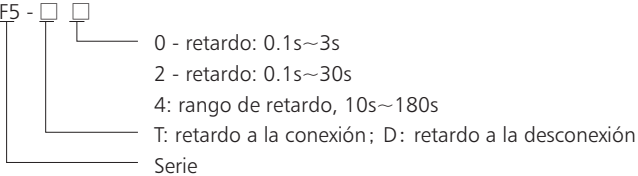
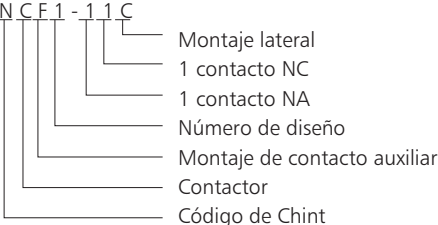


4. Accesorios

4.1 Accesorios para contactores NC1

Características			Modelo	NC1-09(Z)	NC1-12(Z)	NC1-18(Z)	NC1-25(Z)	NC1-32(Z)	NC1-40(Z)	NC1-50(Z)	NC1-65(Z)	NC1-80(Z)	NC1-95(Z)
Bobina CA	Consumo de bobina	Cierre (VA)	70	70	70	110	110	200	200	200	200	200	
		Retención (VA)	8	8	8	11	11	20	20	20	20	20	
		Potencia (W)	1.8~2.7	1.8~2.7	1.8~2.7	3~4	3~4	6~10	6~10	6~10	6~10	6~10	
	Tensión de cierre	(85%~110%) Us						(85%~110%) Us					
	Tensión de apertura	(20%~75%) Us						(20%~75%) Us					
Bobina CC	Tensiones de bobina (50Hz, 60Hz, 50/60Hz) (V)	24,36,48,110,127,220,240,380,415,440,480,500,600,660						24,36,48,110,127,220,240,380,415,440,480,500,600					
	Potencia de bobina (W)	9	9	11	11	11	20	20	20	20	20		
	Tensión de cierre	(85%~110%) Us						(85%~110%) Us					
	Tensión de apertura	(10%~75%) Us						(10%~75%) Us					
	Tensión de bobina (V)	24,36,48,110,220											
Contactos auxiliares F4				Fotografía 									
Temporizadores neumáticos F5				Fotografía 									
Contacto auxiliar lateral NCF1~11C				Fotografía 