


# Linear Array with Intensity Adjustment



## Datasheet

High-Power Lighting with Intensity Adjustment for use with Vision Systems

For complete technical information about this product, including dimensions, accessories, and specifications, see [www.bannerengineering.com/lineararraylights](http://www.bannerengineering.com/lineararraylights).



- Four high-intensity, visible wavelengths, plus IR and UV
- The following array lengths are available:
  - 290 mm (11.4 in)
  - 435 mm (17.7 in)
  - 580 mm (22.8 in)
  - 870 mm (34.2 in)
  - 1160 mm (45.6 in)
- Dual intensity control: potentiometer and Analog wire
- High-power, solid-state LED array; continuous or strobed operation is selectable via sensor software (P4 models) or via hookup
- Optically isolated strobe signal
- Active High or Active Low strobe models available
- LEDs directly illuminate target
- Lens angle of  $\pm 6.5^\circ$  on visible and IR models, lens angle of  $\pm 5^\circ$  on UV 395 nm models, reflector cup angle of  $\pm 15^\circ$  on UV 365 nm models
- Three window materials from which to choose: clear acrylic, clear glass, and clear diffusing acrylic
- Maintenance-free, rugged construction
- Built-in constant current regulation
- Very even light pattern as close as 76.2 mm (3 in)

## Dual Intensity Control

The LED..LA..X..6-P..Q Series Linear Array Lights have a potentiometer and an analog wire that control the intensity of the light from maximum brightness (0 V dc) to dark (10 V dc). The potentiometer set to full counter-clockwise is equivalent to 10 V dc; set to full clockwise it is equivalent to 0 V dc. Generally, users will control the intensity using either the potentiometer or the analog (gray) wire independently. If using the potentiometer to control intensity, apply 0 V dc to the analog (gray) wire; if using the analog (gray) wire to control intensity, set the potentiometer to maximum intensity in its full clockwise position.

If using the potentiometer and analog (gray) wire together to control intensity, it is important to note that, either control applying any voltage greater than 0 to the light reduces the maximum achievable intensity. For example, assume you want a maximum light intensity of 50%, with further adjustability down to dark:

Initial Setting	Available Adjustment for Other Control
Potentiometer sets maximum intensity to 50% (midway point between clockwise and counter-clockwise)	Analog (gray) wire can adjust between 5 V dc and 10 V dc
Analog (gray) wire sets maximum intensity to 50% (5 V dc)	Potentiometer can adjust from $\frac{1}{2}$ counter-clockwise to full counter-clockwise



**NOTE:** The range of intensity of the light is from 100%, down to just below 10% before the light goes completely dark.



## Model Key

Light Source	LED Color	Linear Array	Array Length	Housing	Window Material <sup>1</sup>	Relative Intensity	Intensity Control	Strobe Polarity	Connector
LED	R	LA	290	X	P	6 —	P	L	Q
	R = Red W = White B = Blue G = Green I = IR UV365 = UV365 nm UV395 = UV395 nm		290 mm 435 mm 580 mm 870 mm 1160 mm	X = IP50	P=Clear Plastic G = Glass D = Diffuse Plastic		P = Pot & analog wire	L = Low H = High	Q = QD

The following caution applies to UV365 nm models:



**CAUTION:**

Risk Group 1: UV Emitted from this product.

Minimize exposure to eyes or skin. Use appropriate shielding and eye protection. Risk Group 1 (RG 1) products are safe for most use applications, except for very prolonged exposures where direct ocular exposures may be expected.

- IEC 62471

The following caution applies to UV395 nm models:



**CAUTION:**

Risk Group 2: UV Emitted from this product.

Eye or skin irritation may result from exposure. Use appropriate shielding and eye protection. Risk Group 2 (RG 2) products generally do not pose a realistic optical hazard if aversion responses limit the exposure duration or where lengthy exposures are unrealistic.

- IEC 62471

## Specifications

### Supply Voltage and Current

- 290 mm Models: 24 V dc ± 10% at 1 A maximum
- 435 mm Models: 24 V dc ± 10% at 1.5 A maximum
- 580 mm Models: 24 V dc ± 10% at 2 A maximum
- 870 mm Models: 24 V dc ± 10% at 3 A maximum
- 1160 mm Models: 24 V dc ± 10% at 4 A maximum
- Strobe Voltage: 5 V dc to 24 V dc
- Built-in constant current regulator for LEDs

### Light Source

LED Color	Wavelength	Optional Filter <sup>2</sup>
Infrared	850 nm	FLTI
Red	620 nm to 630 nm	FTLR
Blue	465 nm to 485 nm	FLTB
Green	520 nm to 535 nm	FLTG
White	5000 K to 8300 K	FLTB or FLTG
UV	365 nm	FLTB
	395 nm	

### Operating Conditions

0 °C to +50 °C (+32 °F to +122 °F)

### Connections

Integral 5-pin threaded M12/Euro-style male quick disconnect, accessory cordset required

### Construction

Housing: black anodized aluminum  
Window: acrylic or glass, depending on model

### Mounting

4 M5 T-nuts included, brackets available

### Useful Life

When operated within specifications, output will decrease less than 30% after 50,000 hours for visible and IR models; 20,000 hours for UV models

### Environmental Rating

IEC IP50


### Certification



<sup>1</sup> UV365 Only available with glass window.

<sup>2</sup> Recommended Ambient Light filter kit for use with PresencePLUS Cameras.

## Dimensions

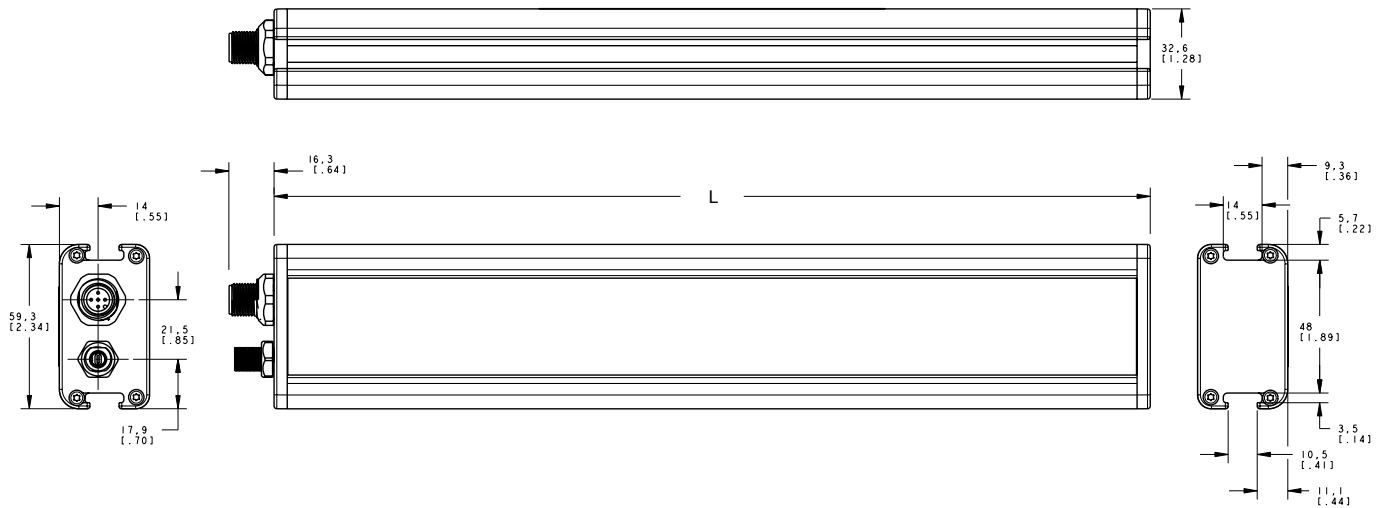

Array Length	Length "L"
290 mm	316.5 mm (12.46 in)
435 mm	462 mm (18.19 in)
580 mm	607.5 mm (23.92 in)
870 mm	898.5 mm (35.37 in)
1160 mm	1189.5 mm (46.83 in)

All measurements are listed in millimeters (inches), unless noted otherwise.

## Wiring

Wire Purpose	Cable Wire Color <sup>3</sup>	Wire Connections	PresencePLUS Pro Controller Terminal Block
Power Wires	Brown (1)	+24 V dc	Pin 01 <sup>4</sup>
	Blue (3)	common	Pin 02
Intensity	Gray (5)	0 V dc to 10 V dc Intensity Control	N/A
Strobe Voltage Wires	White (2)	Active Low: 0 V dc = ON      +5 V dc to 24 V dc = OFF	Pin 04
		Active High: 0 V dc = OFF      +5 V dc to 24 V dc = ON	
	Black (4)	Strobe common	Pin 02

Figure 1. Pinouts for Mating Cable



NOTE: Connection to earth ground recommended.

<sup>3</sup> For Banner-supplied wire.

<sup>4</sup> When connecting the light to a PresencePLUS Pro controller terminal block, the controller supply must be 24 V dc ± 10%.

## Accessory Cordsets

5-Pin Threaded M12/Euro-Style Cordsets				
Model	Length	Style	Dimensions	Pinout (Female)
MQDC20-506	1.83 m (6 ft)	Straight		
MQDC20-515	4.57 m (15 ft)			
MQDC20-530	9.14 m (30 ft)			

## Accessory Brackets

<p><b>SMBLAXRA</b></p> <ul style="list-style-type: none"> <li>Right-angle stainless steel bracket</li> <li>May be used individually or in combination with SMBLAXU to provide swivel adjustment</li> </ul> <p>Includes:</p> <ul style="list-style-type: none"> <li>2 Brackets</li> <li>4 M5 screws (socket drive, button head)</li> <li>4 M5 T-nuts</li> </ul>		<p><b>SMBLAXU</b></p> <ul style="list-style-type: none"> <li>U-shaped stainless steel bracket</li> <li>For use with SMBLAXRA to provide swivel adjustment</li> </ul> <p>Includes:</p> <ul style="list-style-type: none"> <li>2 Brackets</li> <li>4 M5 screws (socket drive, button head)</li> <li>4 M5 T-nuts</li> <li>Four each stainless steel ¼-20 screws (socket drive, button head), lock nuts, washers</li> </ul>	
			<p>Combination View</p>

## Replacement Windows

Array Length	Clear Glass	Clear Acrylic	Diffuse Acrylic	White Diffuse Acrylic
290 mm	LEDLA290XW-G	LEDLA290XW-P	LEDLA290XCDW-P	LEDLA290XWDW-P
435 mm	LEDLA435XW-G	LEDLA435XW-P	LEDLA435XCDW-P	LEDLA435XWDW-P
580 mm	LEDLA580XW-G	LEDLA580XW-P	LEDLA580XCDW-P	LEDLA580XWDW-P
870 mm	LEDLA870XW-G	LEDLA870XW-P	LEDLA870XCDW-P	LEDLA870XWDW-P
1160 mm	LEDLA1160XW-G	LEDLA1160XW-P	LEDLA1160XCDW-P	LEDLA1160XWDW-P

## Banner Engineering Corp Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp.