



INSTALLATION GUIDE: FLUSH MOUNT ROUND LED LIGHT




VONN LIGHTING

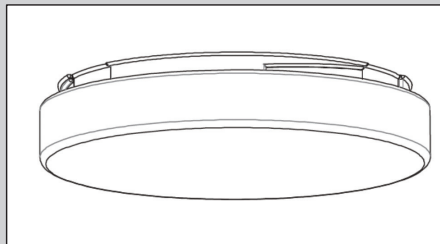

TOOLS YOU MAY NEED

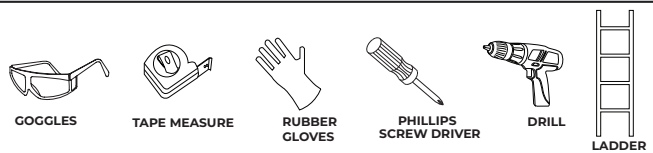

CIRCUIT BOX



LED INFO & WARNINGS ⚠

| | |
|---|--|
| Please read and understand the entire manual before attempting to assemble, operate, or install the product. | Make sure that you have all necessary parts by checking the parts list. If any part is missing or damaged please contact VONN LIGHTING CUSTOMER SERVICE at 888-604-8666 for a replacement. |
| All parts must be used as indicated in these instructions. Do not substitute any parts, leave parts out, or use any parts that are worn or broken. | Inspect the LED fixture prior to installation to make sure that it has not been damaged during shipping. |
| Please handle the LED light with care when unpacking. Do not apply pressure to the LED's, do not open any factory sealed compartments, and do not touch the LEDs with your hands. | VONN highly recommends to use a qualified, licensed electrician to install the fixture. ⚠ |
| VONN recommends to install the fixture on its own independent circuit. Do not install the fixture on the same circuit with the other appliances, or HVAC systems. | Do not remove or replace VONN manufactured parts that is provided with the fixture. |
| Place the wall switch in the "OFF" position of the room you are installing the fixture. | Shut "OFF" the electricity at main fuse box. |

Instructions



BEFORE YOU BEGIN

Read this instructions completely and carefully.



WARNING/AVERTISSEMENT

RISK OF ELECTRIC SHOCK

- ℓ Turn power off before inspection, installation or removal.
- ℓ Properly ground electrical enclosure.

RISK OF FIRE

- ℓ Follow all NEC and local codes.
- ℓ Use only UL or IEC approved wire for input/output connections. Minimum size 18 AWG (0.75 mm²)
- ℓ Do not install insulation within 3 inches (76mm) of luminaire top.

RISQUES DE DECHARGES ELECTRIQUES

- ℓ Coupez l'alimentation avant d'inspecter, installer ou déplacer le luminaire.
- ℓ Assurez-vous de correctement mettre à la terre le boîtier d'alimentation électrique

RISQUES D'INCENDIE

- ℓ Respectez tous les codes NEC et codes locaux.
- ℓ N'utilisez que des fils approuvés par UL pour les entrées/sorties de connexion. Taille minimum 18 AWG (0.75 mm²)
- ℓ Maintenir une distance de 76mm (3 pouces) entre le luminaire et l'isolant.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This Class (A) RELED complies with the Canadian standard ICES-003. Ce DEFR de la classe (A) est conforme à la NMB-003 du Canada.

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Save These Instructions

Use only in the manner intended by the manufacturer.

If you have any questions, contact the manufacturer.

⚠ WARNING: RISK OF INJURY, RISK OF DAMAGE!

Luminaire may fall if inner bezel is not secured properly to outer bezel.

Ensure that the whole loop is positioned and secured under the washer.

The product package includes the following components:

- 1 - Round Flushmount Housing
- 1 - Round Flushmount Diffuser (shipped as part of flushmount housing)
- 3 - Wirenuts (in parts bag)
- 2 - 1 1/2" Electrical Box Screws (in parts bag)
- 1 - Installation Manual

Instructions



Prepare Electrical Wiring



Electrical Requirement

The LED luminaire must be connected to the mains
Supply according to its ratings on the product label.



Grounding Instructions

The grounding and bonding of the overall system shall be done in accordance to
local electric code at the country where the luminaire is installed.


Installation Instructions

1. Tools and material needed: screwdriver, pliers, wire nuts, electrical tape.
2. To help prevent the possibility of electrical shock, the use of rubber sole shoes is recommended.
3. Exercise care when handling the fixture to avoid cuts or abrasions.
4. If a ladder is needed, make sure to use a sturdy wooden one.
5. Screw the long mounting screws into electrical box about two complete turns. (Mounting screws included)
6. Electrical connection: Make sure electricity to the circuit is turned off. Connect green/or bare copper wire to Ground screw (Ground must be properly installed or unit may not work). Connect white wire to white supply wire cover with nut/or twist together and cover really well with electrical tape. Connect black wire supply wire cover with a wire nut/or twist together and cover really well with the electrical tape.
7. Align the canopy base over the long mounting screws so that the screw comes through the keyhole slots. Spin the canopy slightly until screws are at the small end of the keyhole slots. Tighten the self-topping screws until the canopy fits snug to the ceiling.
8. Align diffuser evenly on canopy, then place metal ring on diffuser, let 3 screws from decorative tubes come out of the decorative ring. Twist 3 decorative nuts on top to tighten the ring and diffuser.
9. Turn power on.

Instructions

VONN

Fig. 1

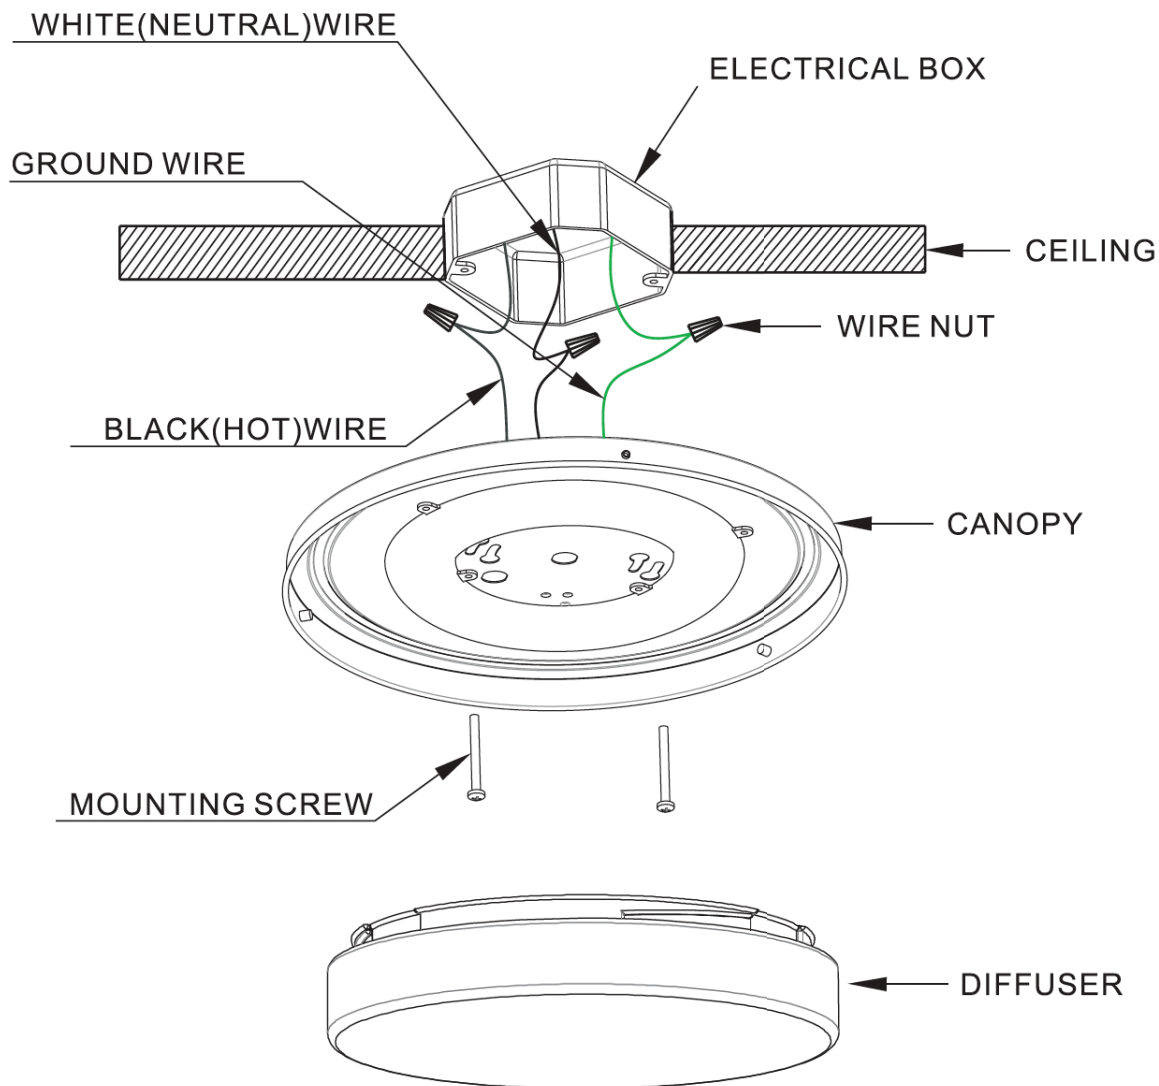

Circuit Box

