


INSTALLATION GUIDE:

Wall Mount Linear LED

2FT and 4FT - Wattage Adjustable

VSL22ICCTADWM / VSL42ICCTADWM



TOOLS YOU MAY NEED



GOGGLES



TAPE MEASURE




RUBBER
GLOVES



PHILLIPS
SCREW DRIVER




DRILL




LADDER



FOR YOUR SAFETY, READ AND UNDERSTAND FOLLOW INSTRUCTIONS!
KEEP THE INSTRUCTIONS IN SAFE PLACE FOR FUTURE REFERENCE!

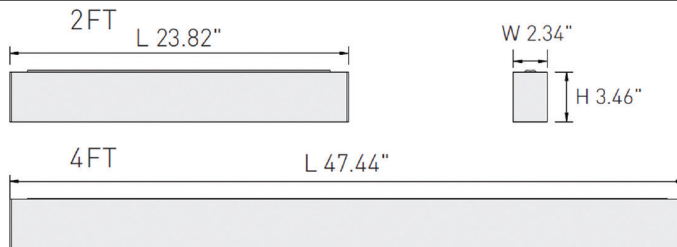


CIRCUIT BOX



LED INFO & WARNINGS !

Please read and understand the entire manual before attempting to assemble, operate, or install the product.	Make sure that you have all necessary parts by checking the parts list. If any part is missing or damaged please contact VONN LIGHTING CUSTOMER SERVICE at 888-604-8666 for a replacement.
All parts must be used as indicated in these instructions. Do not substitute any parts, leave parts out, or use any parts that are worn or broken.	Inspect the LED fixture prior to installation to make sure that it has not been damaged during shipping.
Please handle the LED light with care when unpacking. Do not apply pressure to the LED's, do not open any factory sealed compartments, and do not touch the LEDs with your hands.	VONN highly recommends to use a qualified, licensed electrician to install the fixture. !
VONN recommends to install the fixture on its own independent circuit. Do not install the fixture on the same circuit with the other appliances, or HVAC systems.	Do not remove or replace VONN manufactured parts that is provided with the fixture.
Place the wall switch in the "OFF" position of the room you are installing the fixture.	Shut "OFF" the electricity at main fuse box.



Instructions



WALL MOUNT LED




RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.


IMPORTANT

1. Read all instructions.
2. Install in accordance with national and local electrical code regulations.
3. This product is intended to be installed and serviced by a qualified, licensed electrician.
4. Do not install in wet locations. For dry and damp use only.
5. Turn off electrical power before installing or servicing fixture in any way.
6. To reduce the risk of fire and overheating, make sure all connections are tight.
7. Under no circumstances can the lighting fixture be covered with heat insulation gasket or similar materials.
8. The maximum connection of each input line is 40FT(1200CM) in 120AC, 80FT(2400CM) in 230AC, 100FT(3000CM) in 277AC.


ACCESSORY




Wire Nut




Square plate
(Optional accessory)
Noted: Square plate
Compatible for 4"
octagon, 4" round,
4" square and 2x4"
rectangle junction
boxes.




Male quick
connector
(5 holes)



Anchor




Screw



Screw




Screw

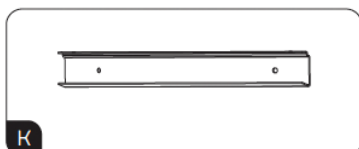

Wall Mounting Bracket

WIRING

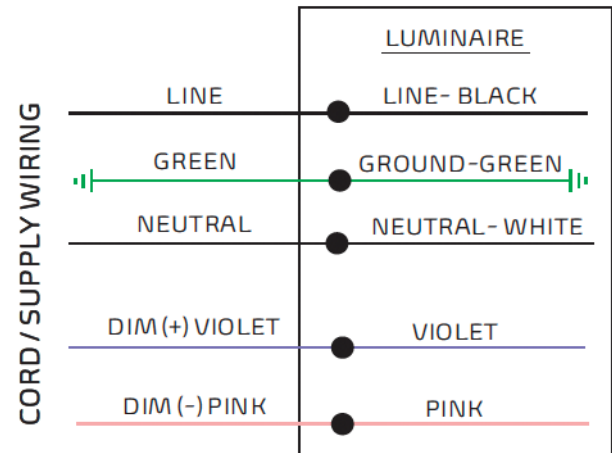

Please isolate two dimming wires by P2 terminal individually if no need dimming; **MUST** connect wires with corresponding colors as shown.

Instructions

VONN


WALL MOUNT LED



RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

INDEPENDENT INSTALLATION


1 Assemble Power Cord

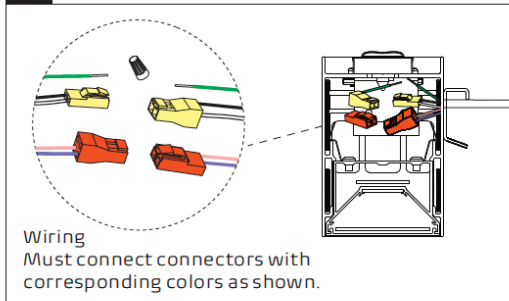


Wiring
Must connect connectors with corresponding colors as shown.

Take off the end cap and LED modular, thread the power cord out of the housing as shown. Wiring and then remount LED modular and end cap.

2 Install mounting point on wall

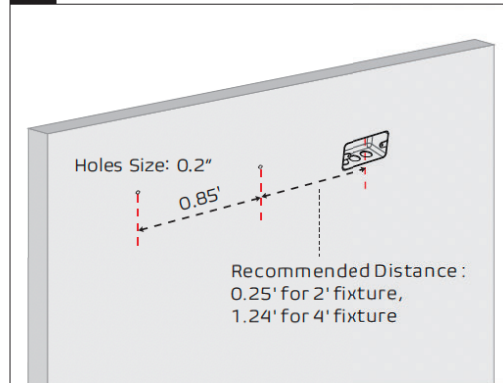


3 Install plate and bracket

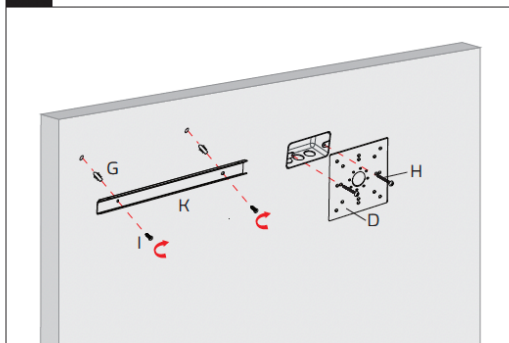

2-1: Insert Anchor "G" into hole and fix the wall mounting bracket "K" with screw "I".

2-2: Mount the square cover plate "D" onto J-box with screw "H", then plastering.


4 Wiring

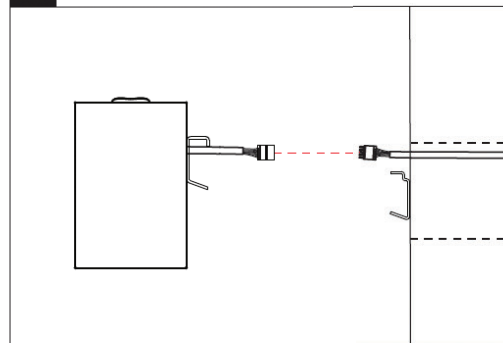

3-1: Plug in AC wires, dimming wires and ground wire into the male quick connector (5 holes) "E" according to label instructions.


3-2: Plug in the male and female connector together, hide all wires into the junction box.

5 Mounting

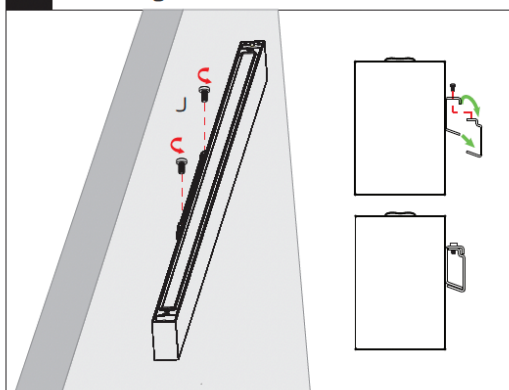

Match the hole position of the fixture and "wall mounting bracket", and mount the fixture onto wall with screw "J".

6 Complete

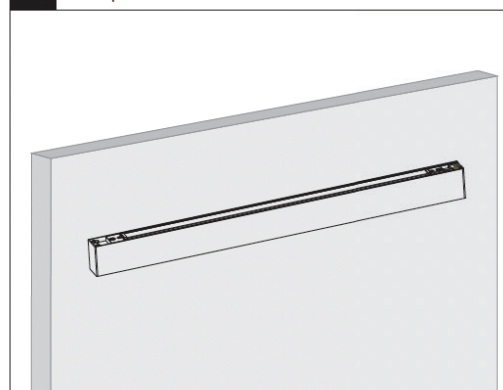

Instructions




WALL MOUNT LED



RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

ACCESSORY



"—" Joiner



Silicone Seal


Noted: Silicone Seal is used to seal seams that may appear at both ends of luminaires when multiple connections.

BEFORE CONNECTING

Disassemble luminaires



Start of run (SoR): Remove the end cap without power code, insert the joiner and fix it with screw.




Middle of run (MoR): Remove both end caps, insert the joiner and fix it with screw.




End of run (EoR): Remove the end cap with power code, insert the joiner and fix it with screw.

MULTIPLE LUMINAIRES CONNECTION


1 Install mounting point on wall

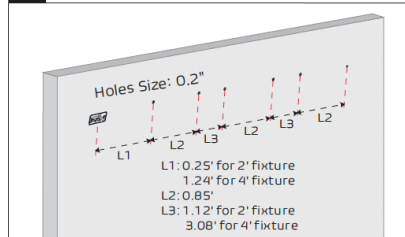

2 Install plate and bracket from SoR to EoR

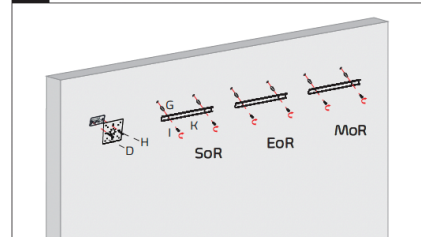


3 Wiring – SoR

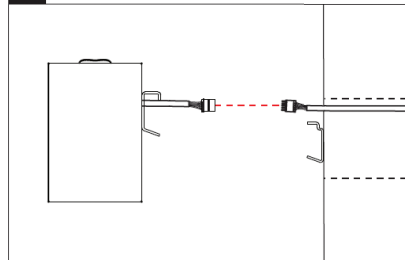

3-1: Plug in AC wires, dimming wires and ground wire into the male quick connector (5 holes) "E" according to label instructions.


3-2: Plug in the male and female connector together, hide all wires into the junction box.

4 Mounting

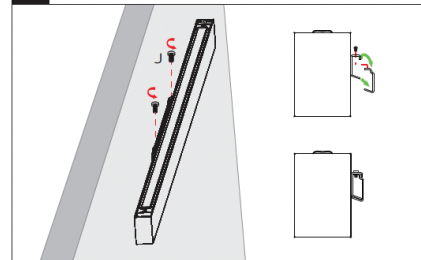


Match the hole position of the fixture and "wall mounting bracket", and mount the fixture onto wall with screw "J".

5 Repeat install and join steps - MoR to EoR

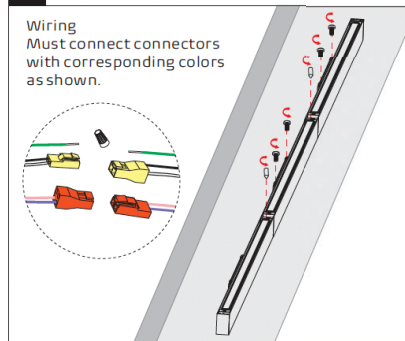

6 Complete

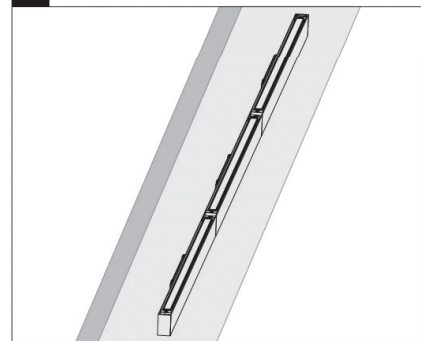

Optional 42' Diffuser Lens Roll

