

INSTALLATION GUIDE:

META Up/Down Linear

Pendant | Architectural LED Linear

VUD4CCT / VUD8CCT



TOOLS YOU MAY NEED



GOGGLES



TAPE MEASURE




RUBBER GLOVES




PHILLIPS SCREW DRIVER



DRILL




LADDER

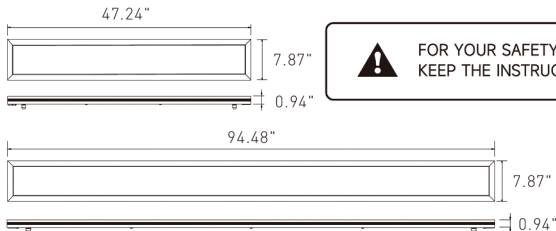

FOR YOUR SAFETY, READ AND UNDERSTAND FOLLOW INSTRUCTIONS!
KEEP THE INSTRUCTIONS IN SAFE PLACE FOR FUTURE REFERENCE!

CIRCUIT BOX

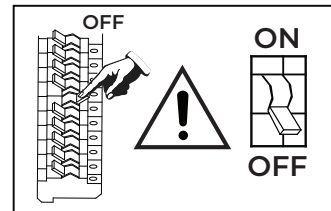

LED INFO & WARNINGS !

Please read and understand the entire manual before attempting to assemble, operate, or install the product.	Make sure that you have all necessary parts by checking the parts list. If any part is missing or damaged please contact VONN LIGHTING CUSTOMER SERVICE at 888-604-8666 for a replacement.
All parts must be used as indicated in these instructions. Do not substitute any parts, leave parts out, or use any parts that are worn or broken.	Inspect the LED fixture prior to installation to make sure that it has not been damaged during shipping.
Please handle the LED light with care when unpacking. Do not apply pressure to the LED's, do not open any factory sealed compartments, and do not touch the LEDs with your hands.	VONN highly recommends to use a qualified, licensed electrician to install the fixture. !
VONN recommends to install the fixture on its own independent circuit. Do not install the fixture on the same circuit with the other appliances, or HVAC systems.	Do not remove or replace VONN manufactured parts that is provided with the fixture.
Place the wall switch in the "OFF" position of the room you are installing the fixture.	Shut "OFF" the electricity at main fuse box.

Instructions




UP/DOWN PENDANT LED

ARCHITECTURAL LED LINEAR LUMINAIRE
INSTALLATION INSTRUCTIONS



RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

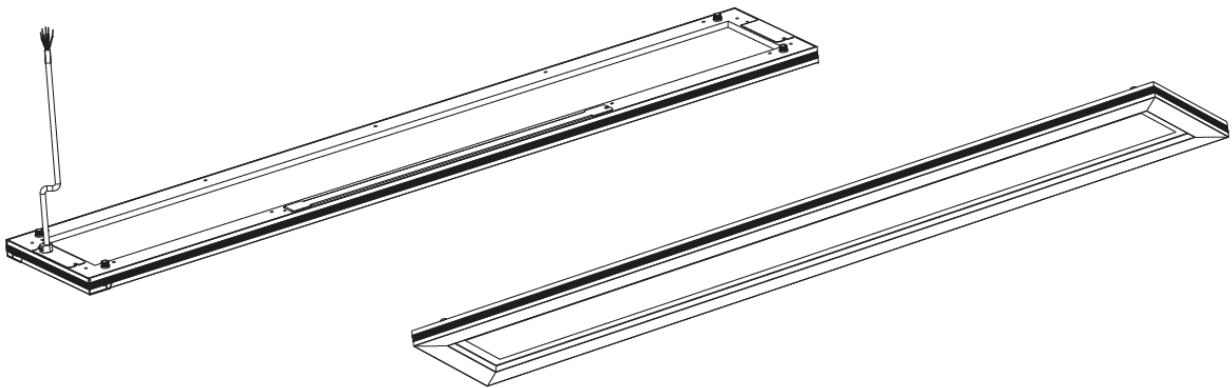

IMPORTANT


1. Read all instructions.
2. Install in accordance with national and local electrical code regulations.
3. This product is intended to be installed and serviced by a qualified, licensed electrician.
4. Do not install in wet locations. For dry and damp use only.
5. Turn off electrical power before installing or servicing fixture in any way.
6. To reduce the risk of fire and overheating, make sure all connections are tight.
7. Under no circumstances can the lighting fixture be covered with heat insulation gasket or similar materials.
8. Seamless continue runs per power feed:
40W: Up to 10pcs in 120V AC, 20pcs in 230V AC and 25pcs in 277V AC
54W: Up to 8pcs in 120V AC, 15pcs in 230V AC and 18pcs in 277V AC
80W: Up to 5pcs in 120V AC, 10pcs in 230V AC and 12pcs in 277V AC

ATTENTION




SHOCK HAZARD!

May result in serious injury or death.
Turn power OFF at circuit breaker
prior to installation or servicing.



Once final building cleanup
has been completed,
remove remaining lens
protective film.

WIRING

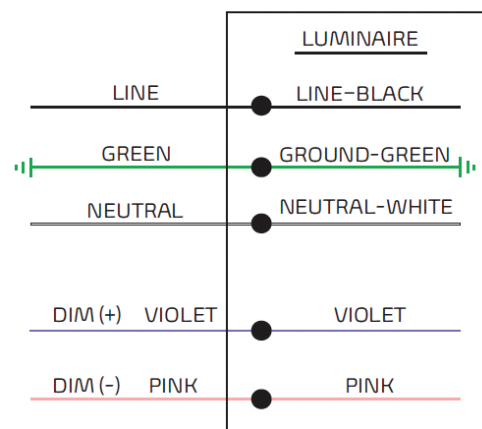

Instructions

VONN


DRY CEILING PENDANT LED

ARCHITECTURAL LED LINEAR LUMINAIRE
INSTALLATION INSTRUCTIONS




RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

POWER FEED

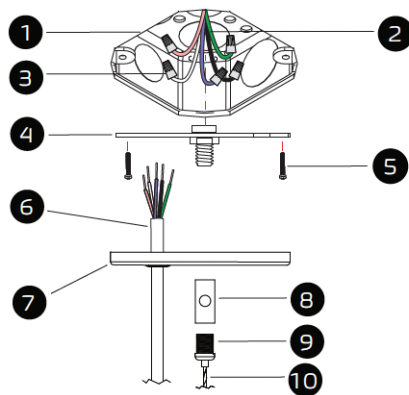


NON POWER SUSPENSION

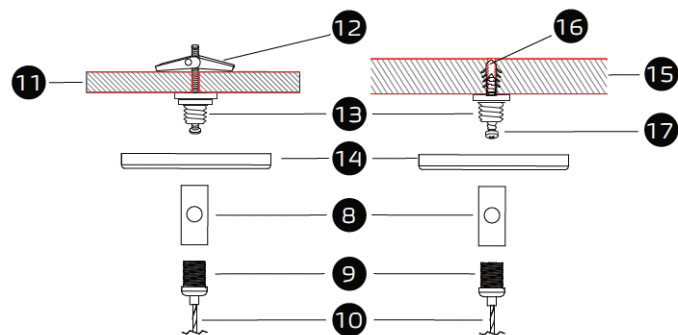


PARTS LIST


- 1 4" Octagon Junction Box (By Others)
- 2 Power Cord (By Others)
- 3 Wire Nut
- 4 Junction Box Crossbar
- 5 Screw PM4*22
- 6 Power Cord
- 7 4" Power Canopy Kit
- 8 Cable Holder
- 9 Strain Relief Thread Nut
- 10 Aircraft Cable
- 11 Drywall Ceiling (By Others)
- 12 Butterfly Drywall Anchor
- 13 Crimp Stud
- 14 2" Canopy
- 15 Solid Ceiling (By Others)
- 16 Anchor
- 17 Screw PA4*30




Wire Nut




Junction Box Crossbar




Screw PM4*22




Power Cord




4" Canopy Power Feed




Cable Holder



Strain Relief Thread Nut




Aircraft Cable



Butterfly Drywall Anchor




Crimp Stud



2" Canopy



Anchor



Screw PA4*30

Instructions

VONN


DROP CEILING PENDANT LED

ARCHITECTURAL LED LINEAR LUMINAIRE
INSTALLATION INSTRUCTIONS




RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

► POWER FEED

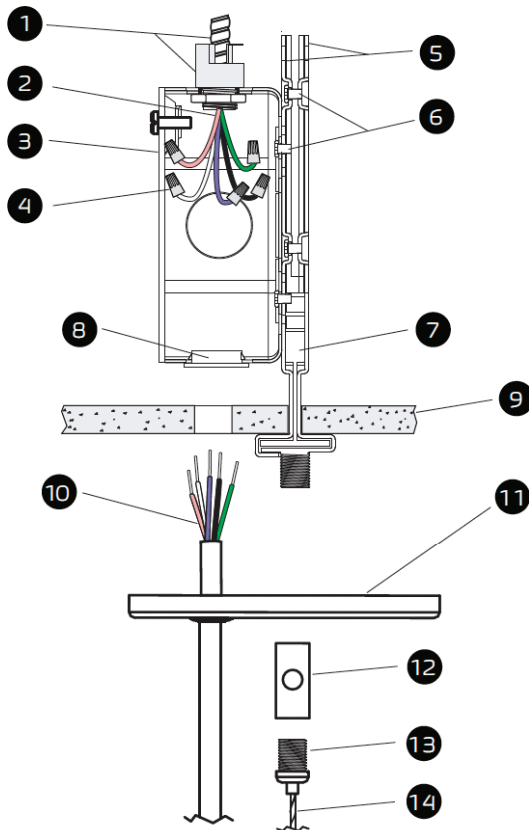


► NON POWER SUSPENSION

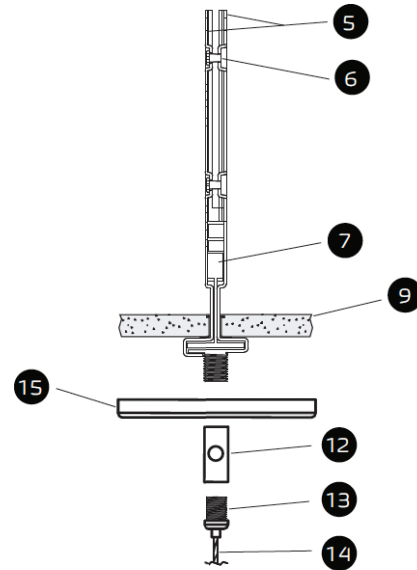


► PARTS LIST


- 1 Armored Cable & Connector (By Others)
- 2 Power Cord (By Others)
- 3 4" Octagon Junction Box
- 4 Wire Nut
- 5 Assembled T-grid Clips
- 6 Screw 6#*4
- 7 T-grid (By Others)
- 8 Plastic Grommet
- 9 Ceiling Tile (By Others)
- 10 Power Cord
- 11 4" Canopy Power Feed
- 12 Cable Holder
- 13 Strain Relief Thread Nut
- 14 Aircraft Cable
- 15 2" Canopy




Assembled T-grid Clips




Screw 6#*4




Plastic Grommet




Power Cord




4" Canopy Power Feed




Cable Holder



Strain Relief Thread Nut



Aircraft Cable



2" Canopy


Instructions

VONN

INDEPENDENT PENDANT LED ARCHITECTURAL LED LINEAR LUMINAIRE INSTALLATION INSTRUCTIONS



RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

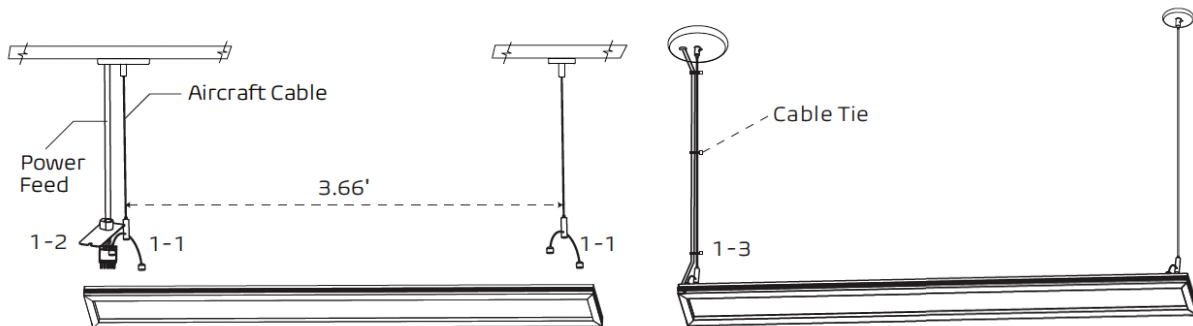


1-1: Screw aircraft cables clockwise on the top of luminaire.

1-2: Connect the quick connectors properly.

1-3: Zip tight power cord & aircraft suspension cable with the cable tie if needed.



Adjust the height of luminaire. Luminaire can be raised by pulling cable through the gripper and can be lowered by depressing the top cylinder on the gripper which pulls the luminaire down.

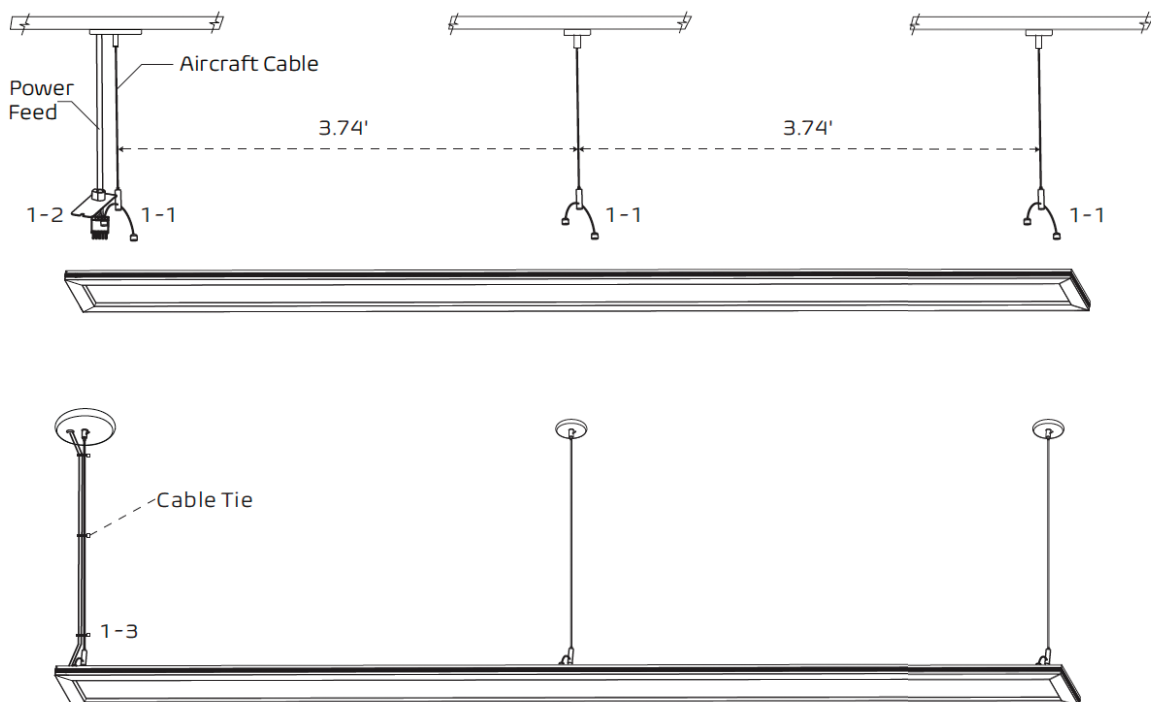

Instructions




MULTIPLE LUMINAIRES CONNECTION | PENDANT | LED




RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

► 4' UP/DOWN LUMINAIRE

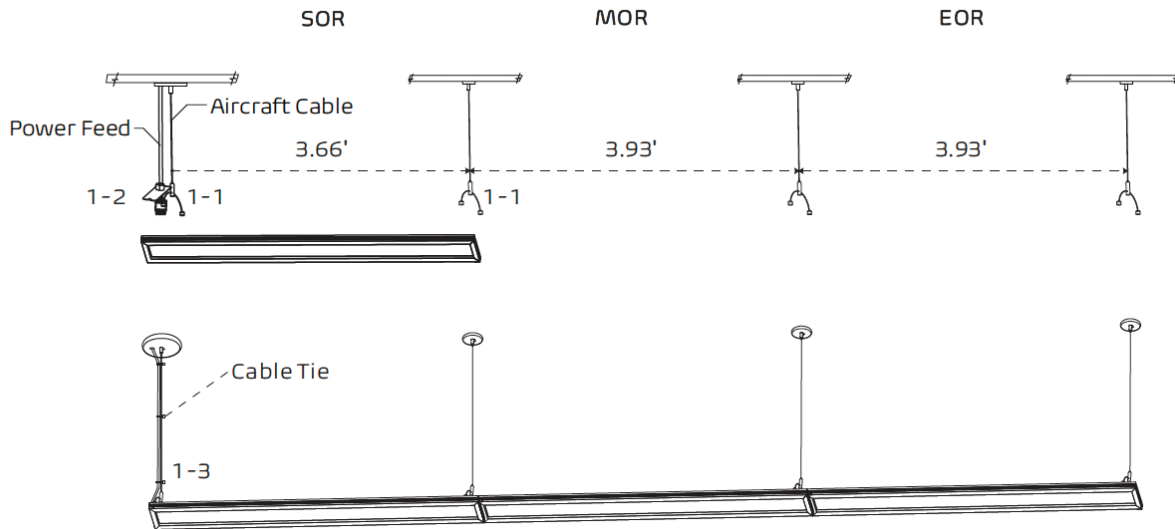

► 8' UP/DOWN LUMINAIRE

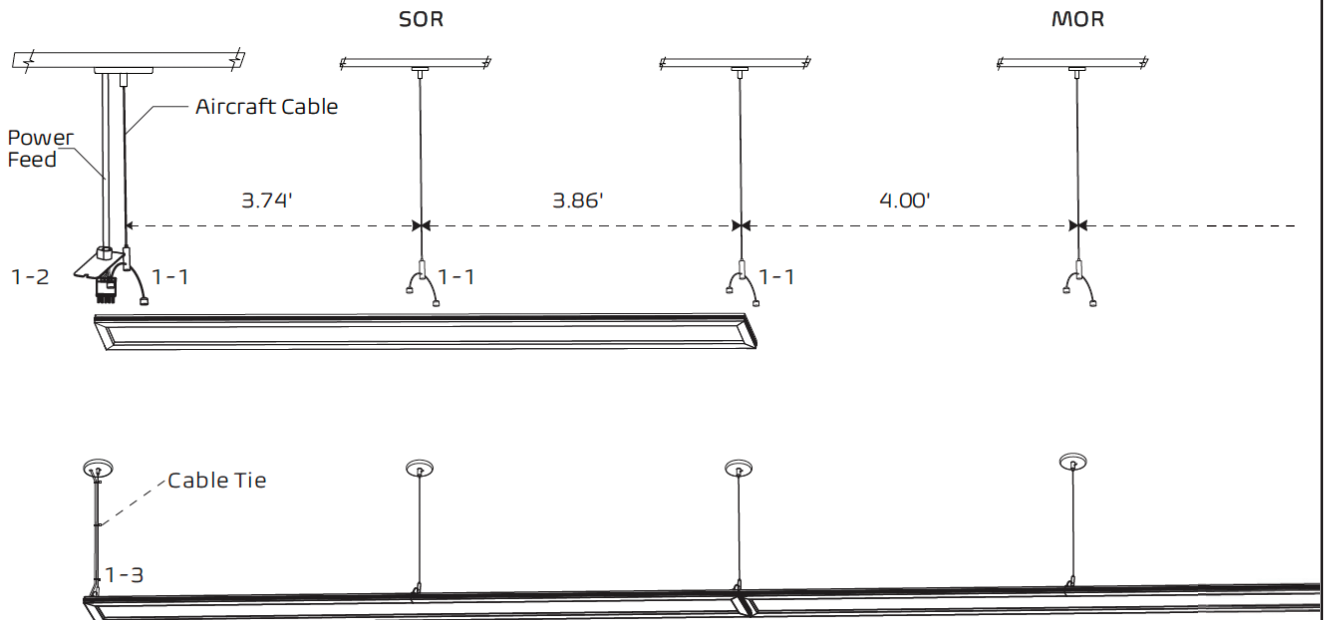

Instructions

VONN

MULTIPLE LUMINAIRES CONNECTION PENDANT LED



RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

Hang Luminaires


- 1-1: Screw aircraft cables clockwise on the top of luminaires.
- 1-2: Connect the quick connectors properly.
- 1-3: Zip tight power cord & aircraft suspension cable with the cable tie if needed.




Adjust the height of luminaire. Luminaire can be raised by pulling cable through the gripper and can be lowered by depressing the top cylinder on the gripper which pulls the luminaire down.

Seamless Continue Runs Per Power Feed


- 40W: Up to 10pcs in 120V AC, 20pcs in 230V AC and 25pcs in 277V AC
- 54W: Up to 8pcs in 120V AC, 15pcs in 230V AC and 18pcs in 277V AC
- 80W: Up to 5pcs in 120V AC, 10pcs in 230V AC and 12pcs in 277V AC

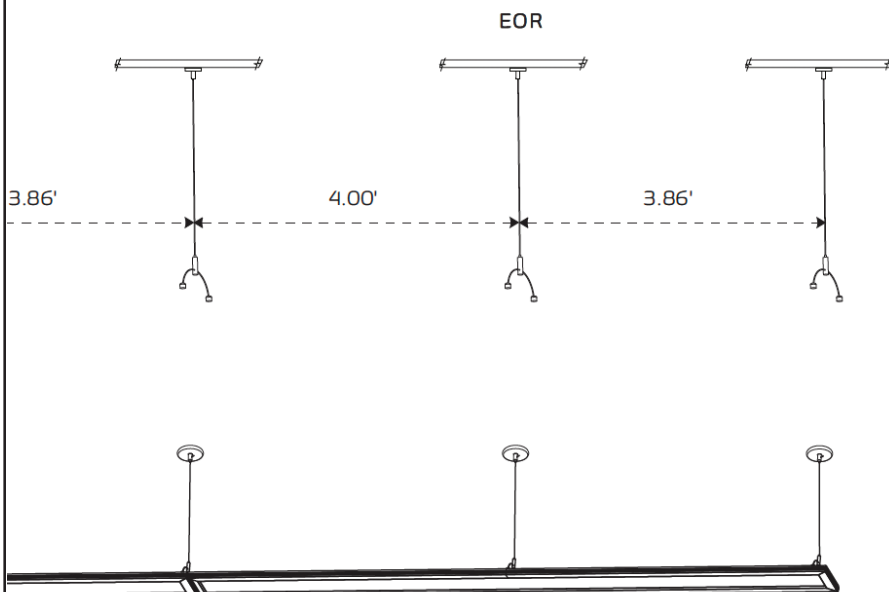


Joint Steps

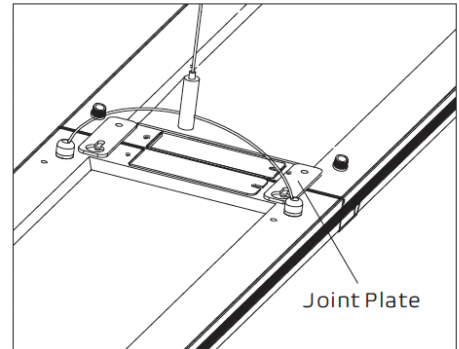

- ① Joint two luminaires together by mounting the Joint plate on the both sides as shown.

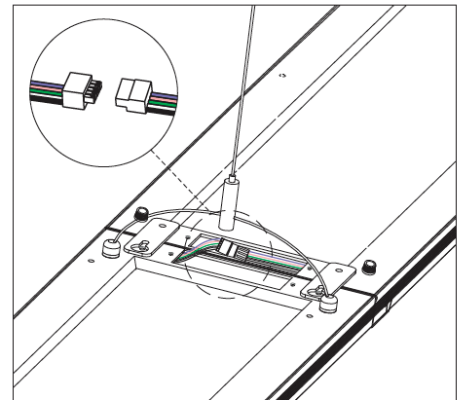

- ② Remove the existing covers, then connect the quick connectors properly.

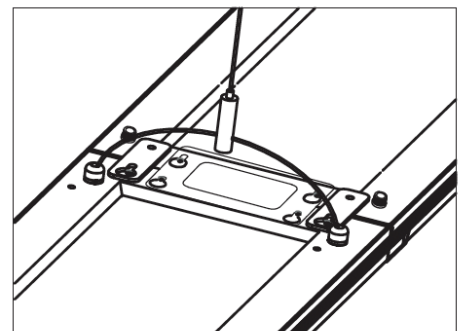

- ③ Mount the joint cover by screw.