EAZYZAP

Glue Board Fly Killer

Instruction manual



Model:

CT870-A

Safety Instructions

- A service agent/qualified technician should carry out installation and any repairs if required. Do not remove any components on this product.
- Consult Local and National Standards to comply with the following:
  - Health and Safety at Work Legislation
  - Fire Precautions
  - Wiring Regulations
  - Building Regulations
- Always switch off and disconnect the power supply to the appliance before cleaning.
- Install the appliance out of the reach of children.
- Never insert hands or other objects into the appliance while it is connected to the power supply.
- Install the appliance at least 1 metre away from food preparation areas.
- Never use near flammable objects.
- Keep all packaging away from children. Dispose of the packaging in accordance to the regulations of local authorities.
- If the power cord is damaged, it must be replaced by an EAZYZAP agent or a recommended qualified technician in order to avoid a hazard.
- EAZYZAP recommend that this appliance should be periodically tested (at least annually) by a Competent Person. Testing should include, but not be limited to: Visual Inspection, Polarity Test, Earth Continuity, Insulation Continuity and Functional Testing.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- Children should be supervised to ensure that they do not play with the appliance.
- For INDOOR use only.

CT870-A_A5_v2_20220325.indb 2 2022/3/25 11:35

- The appliance is not to be used in locations where flammable vapour or explosive dust is likely to exist.
- Do not use in barns , stables and similar locations.

Introduction

Please take a few moments to carefully read through this manual. Correct maintenance and operation of this machine will provide the best possible performance from your EAZYZAP product.

Pack Contents

The following is included:

- EAZYZAP Glue board fly killer
- Detachable power cord
- Instruction manual

EAZYZAP prides itself on quality and service, ensuring that at the time of unpacking the contents are supplied fully functional and free of damage.


Should you find any damage as a result of transit, please contact your EAZYZAP dealer immediately.

Installation


1. Remove all packaging and protective film from the appliance.
2. For best results, locate the appliance in the darkest part of the room, but at least 1 metre away from food preparation areas.

Note: Close proximity to other light sources such as sky lights and windows will reduce the effectiveness of the appliance.
Prepare the mounting fixings (not supplied) before installation. If in doubt seek professional advice or assistance.

3. Upon necessity you can install the appliance onto the wall as instructed below.

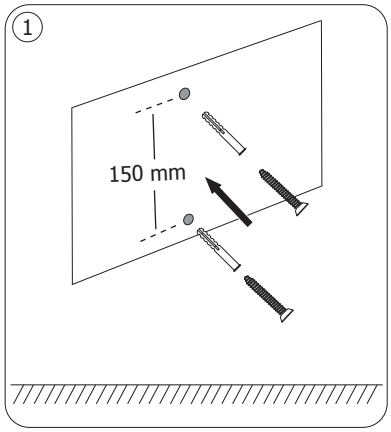

- Drill 2 holes on the wall. Ensure there is no electric/water pipe beneath the holes.
- Insert wall plugs and screws into the holes consecutively (Fig. 1).

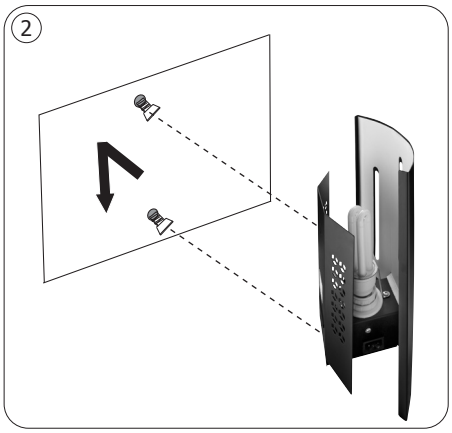

- Hang the appliance on the screws and ensure it rests in place (Fig. 2).

CT870-A_A5_v2_20220325.indb 3 2022/3/25 11:36

Operation

WARNING: Under no circumstances should hands be placed anywhere near the appliance when it is in operation.

The appliance uses the specified wavelength of black light tube to attract insects. Then the insects are drawn towards glue board and can't escape the strength of the glue.

The appliance is highly efficient and harmless to humans and pets. To use the appliance:

1. Connect the power cord to the appliance then to the mains power.
2. The light will come on and ready for use.

Cleaning, Care & Maintenance

Always switch off the power and disconnect the appliance from the power supply before cleaning and maintenance.


- DO NOT immerse the appliance in water. Wipe the safety guard and external casing with a damp cloth.

Changing the glue board and light

WARNING: Always turn Off the appliance and disconnect from the power supply before changing the glue board or light.

Replace the glue board regularly (on a monthly basis). To change the glue board, simply pull it out (Fig. 3). Replace with a new one.

To change the light:
1. Remove the 2 screws on the metal support that is fixing the light tube.
2. Remove the metal support.
3. Twist the light tube anti-clockwise from its socket.
4. Insert the new light and twist clockwise until tight.
5. Re-put the metal support in place.

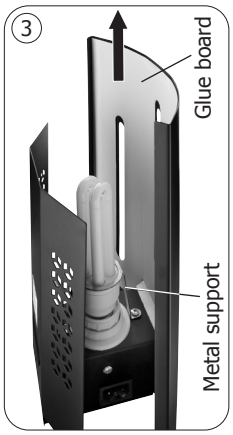

Troubleshooting

A qualified technician must carry out repairs if required.

Fault	Probable Cause	Solution
The appliance is not working	Unit is not switched on	Check the unit is plugged in correctly
	Plug or lead is damaged	Replace plug or lead
	Mains power supply fault	Check mains power supply
	Tube has expired	Refer to the 'Changing the glue board and light' section
	Tube is faulty or has not been fitted correctly	

CT870-A_A5_v2_20220325.indb 4 2022/3/25 11:36

Technical Specifications

Model	Voltage	Power	Dimensions h x w x d (mm)	Weight	Lamp type
CT870-A	220-240V~ 50/60Hz	13W	325 x 235.8 x 122	0.85kg	E27 13W UVA energy saving lamp

Electrical Wiring

The plug is to be connected to a suitable mains socket.

This appliance is wired as follows:

- Live wire (coloured brown) to terminal marked L
- Neutral wire (coloured blue) to terminal marked N
- Earth wire (coloured green/yellow) to terminal marked E

This appliance must be earthed.



If in doubt consult a qualified electrician.

Electrical isolation points must be kept clear of any obstructions. In the event of any emergency disconnection being required they must be readily accessible.

Compliance

The product must not be disposed of as household waste. To help prevent possible harm to human health and/or the environment, the product must be disposed of in an approved and environmentally safe recycling process. For further information on how to dispose of this product correctly, contact the product supplier, or the local authority responsible for waste disposal in your area.

EAZYZAP parts have undergone strict product testing in order to comply with regulatory standards and specifications set by international, independent, and federal authorities.

EAZYZAP products have been approved to carry the following symbol:



All rights reserved. No part of these instructions may be produced or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without the prior written permission of EAZYZAP.
Every effort is made to ensure all details are correct at the time of going to press, however, EAZYZAP reserve the right to change specifications without notice.

CT870-A_A5_v2_20220325.indb 5 2022/3/25 11:36

DECLARATION OF CONFORMITY

• Conformiteitsverklaring • Déclaration de conformité • Konformitätserklärung • Dichiarazione di conformità • • Declaración de conformidad • Declaração de conformidade

Equipment Type • Uitrustingstype • Type d'équipement • Gerätetyp • Tipo di apparecchiatura • Tipo de equipo • Tipo de equipamento		**Model** • Modèle • Modell • Modello • Modelo • Malli
Eazyzap Glue Board Fly Killer		CT870 (& -E -A)
Application of Territory Legislation & Council Directives(s) Toepassing van Europese Richtlijn(en) • Application de la/des directive(s) du Conseil • Anwendbare EU-Richtlinie(n) • Applicazione delle Direttive • Aplicación de la(s) directiva(s) del consejo • Aplicação de directiva(s) do Conselho	**Low Voltage Directive (LVD) - 2014/35/EU** **Electrical Equipment (Safety) Regulations 2016** EN 60335-1:2012 +A11:2014 +A13:2017 +A1:2019 +A14:2019 +A2:2019 EN 60335-2-59:2003 +A1:2006 +A2:2009 +A11:2018 EN 62233:2008 **Electro-Magnetic Compatibility (EMC) Directive 2014/30/EU - recast of 2004/108/EC** **Electromagnetic Compatibility Regulations 2016 (S.I. 2016/1091)** EN55014-1:2017 EN55014-2:2015 EN IEC 61000-3-2: 2019 EN 61000-3-3: 2013 +A1:2019 **Restriction of Hazardous Substances Directive (RoHS) 2015/863 amending Annex II to Directive 2011/65/EU** **Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (S.I. 2012/3032)**	**Electrical Safety** IEC 60335-1:2010 +A1:2013 +A2:2016 IEC 60335-2-59:2002 +A1:2006 +A2:2009 **Electromagnetic Compatibility** EN55014-1:2017 EN55014-2:2015 EN IEC 61000-3-2: 2019 EN 61000-3-3: 2013 +A1:2019
Producer Name • Naam fabrikant • Nom du producteur • Name des Herstellers • Nome del produttore • Nombre del fabricante • Nome do fabricante		**Eazyzap**

I, the undersigned, hereby declare that the equipment specified above conforms to the above Territory Legislation, Directive(s) and Standard(s).
Ik, de ondergetekende, verklaar hierbij dat de hierboven gespecificeerde uitrusting goedgekeurd is volgens de bovenstaande Richtlijn(en) en Standaard(en).
Je soussigné, confirme la conformité de l'équipement cité dans la présente à la / aux Directive(s) et Norme(s) ci-dessus
Ich, der/die Unterzeichnende, erkläre hiermit, dass das oben angegebene Gerät der/den oben angeführten Richtlinie(n) und Norm(en) entspricht.
Il sottoscritto dichiara che l'apparecchiatura di sopra specificata è conforme alle Direttive e agli Standard sopra riportati.
El abajo firmante declara por la presente que el equipo arriba especificado está en conformidad con la(s) directiva(s) y estándar(es) arriba mencionadas.
Eu, o abaixo-assinado, declaro que o equipamento anteriormente especificado está em conformidade com a(s) anterior(es) Directiva(s) e Norma(s)

Date • Data • Date • Datum • Data • Fecha • Data	**29th April 2021**		
Signature • Handtekening • Signature • Unterschrift Firma • Firma • Assinatura	DocuSigned by: Ashley Hooper B39382C9FD9C478...	DocuSigned by: Eoghan Donnellan D352874F7FAB460...	DocuSigned by: Josie Holt 3582E210C4054DA...
Full Name • Volledige naam • Nom et prénom • Vollständiger Name • Nome completo • Nombre completo • Nome por extenso	**Ashley Hooper**	**Eoghan Donnellan**	**Josie Holt**
Position • Functie • Fonction • Position • Qualifica • Posición • Função	**Technical & Quality Manager**	**Commercial Manager/ Importer**	**Commercial Manager/ Responsible Supplier**
Producer Address • Adres fabrikant • Adresse du producteur • Anschrift des Herstellers • Indirizzo del produttore • Dirección del fabricante • Morada do fabricante	**Fourth Way, Avonmouth, Bristol, BS11 8TB United Kingdom**	**Unit 9003, Blarney Business Park, Blarney, Co. Cork Ireland**	**15 Bagdally Road, Campbelltown NSW 2560**



CT870-A_A5_v2_20220325