



Insect Killer

Instruction manual



Model:
FD496-A / FD497-A / FD498-A

Safety Instructions

- A service agent/qualified technician should carry out installation and any repairs if required. Do not remove any components on this product.
- Consult Local and National Standards to comply with the following:
 - Health and Safety at Work Legislation
 - Fire Precautions
 - Wiring Regulations
 - Building Regulations
- Always switch off and disconnect the power supply to the appliance before cleaning.
- Install the appliance out of the reach of children.
- Never insert hands or other objects into the appliance while it is connected to the power supply.
- Install the Insect killer at least 1 metre away from food preparation areas.
- Never use near flammable objects.
- For INDOOR use only.
- Keep all packaging away from children.
- If the power cord is damaged, it must be replaced by an EAZYZAP agent or a recommended qualified technician in order to avoid a hazard.
- EAZYZAP recommend that this appliance should be periodically tested (at least annually) by a Competent Person. Testing should include, but not be limited to: Visual Inspection, Polarity Test, Earth Continuity, Insulation Continuity and Functional Testing.
- **Danger - High voltage!** 
- The appliance emits UV radiation. Do not stare at the light.

- The appliance is not to be used in locations where flammable vapour or explosive dust is likely to exist.
- Do not use in barns, stables and similar locations.

2. For best results, locate the Insect killer in the darkest part of the room, but at least 1 metre away from food preparation areas.

Note: Close proximity to other light sources such as sky lights and windows will reduce the effectiveness of the Insect killer.

3. Connect the appliance to mains power.

Product Description

FD496-A - LED Insect Killer - Small

FD497-A - LED Insect Killer - Medium

FD498-A - LED Insect Killer - Large

Introduction

Please take a few moments to carefully read through this manual. Correct maintenance and operation of this machine will provide the best possible performance from your EAZYZAP product.

Pack Contents

The following is included:

- Insect Killer
- Instruction manual
- Hanging chain

EAZYZAP prides itself on quality and service, ensuring that at the time of packaging the contents are supplied fully functional and free of damage.

Should you find any damage as a result of transit, please contact your EAZYZAP dealer immediately.

Installation

Note: Ensure the mounting substrate and the fixings used can support the weight of the appliance. If in doubt seek professional advice or assistance.

1. Remove all packaging and protective film from the Insect killer.

Operation



WARNING: Under no circumstances should hands be placed anywhere near the high voltage grid when the appliance is operational.

The insect killer works by luring insects on to an electrified metal grid using ultra-violet light. It uses no chemicals and is pollution free. To use the Insect killer:

1. Press the switch to the ON (**I**) position. Ensure it is set to OFF (**O**) before plugging into mains.
2. The light will come on and the grid will become electrically charged.

Cleaning, Care & Maintenance




Always switch off the power and disconnect the appliance from the power supply before cleaning.

- Clean the collection tray regularly with warm soapy water.
- DO NOT immerse the appliance in water. Wipe the safety guard and external casing with a damp cloth.
- Change the bulbs every 12 months.


Changing the Bulb

WARNING: Always turn Off the appliance and disconnect from the power supply before changing the bulb.

1. Remove the collection tray.
2. Lay the appliance face down.
3. Unscrew the two screws holding the safety guard at the rear of the Insect killer [Fig. 1].

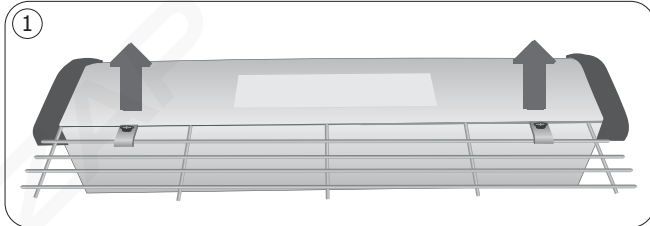

4. Lift up the guard rail [Fig. 2].

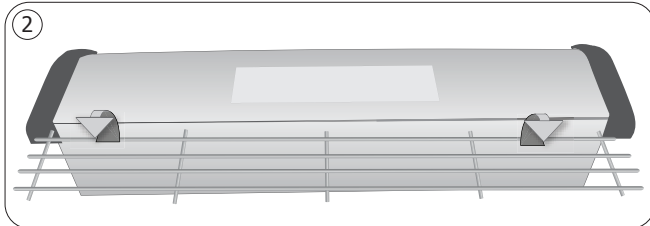

5. Holding the ends of the bulb, twist it 'forwards' in its socket until it clicks [Fig. 3].



6. Slide the bulb up out of its sockets [Fig. 4].
7. Replace with a new bulb.
8. Twist the new bulb 'backwards' to lock it back in place.
9. Replace the guard rail and the two screws.



Troubleshooting

A qualified technician must carry out repairs if required.

Fault	Probable Cause	Solution
The appliance is not working	The unit is not switched on	Check the unit is plugged in correctly and switched on
	Plug or lead is damaged	Replace plug or lead
	Power supply	Check power supply
	Tube has expired	Refer to the 'Changing the Bulb' section
	Tube is faulty or has not been fitted correctly	

Technical Specifications

Model	Voltage	Power	Dimensions h x w x d (mm)	Weight
FD496-A	220-240V~ 50-60Hz	15W	272 x 350 x 86	2.05kg
FD497-A	220-240V~ 50-60Hz	19W	320 x 500 x 86	2.7kg
FD498-A	220-240V~ 50-60Hz	24W	320 x 650 x 86	3.4kg

Electrical Wiring

The plug is to be connected to a suitable mains socket.

This appliance is wired as follows:

- Live wire (coloured brown) to terminal marked L
- Neutral wire (coloured blue) to terminal marked N
- Earth wire (coloured green/yellow) to terminal marked E

This appliance must be earthed.



If in doubt consult a qualified electrician.

Electrical isolation points must be kept clear of any obstructions. In the event of any emergency disconnection being required they must be readily accessible.

Compliance

The product must not be disposed of as household waste. To help prevent possible harm to human health and/or the environment, the product must be disposed of in an approved and environmentally safe recycling process. For further information on how to dispose of this product correctly, contact the product supplier, or the local authority responsible for waste disposal in your area.

EAZYAP parts have undergone strict product testing in order to comply with regulatory standards and specifications set by international, independent, and federal authorities.

EAZYAP products have been approved to carry the following symbol:



All rights reserved. No part of these instructions may be produced or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without the prior written permission of EAZYAP.
Every effort is made to ensure all details are correct at the time of going to press, however, EAZYAP reserve the right to change specifications without notice.

DECLARATION OF CONFORMITY

- Conformiteitsverklaring • Déclaration de conformité • Konformitätserklärung • Dichiarazione di conformità •
• Declaración de conformidad • Declaração de conformidade

Equipment Type • Uitrustingstype • Type d'équipement • Gerätetyp • Tipo di apparecchiatura • Tipo de equipo • Tipo de equipamento		Model • Modèle • Modell • Modello • Modelo • Malli
LED Insect Killer 15W LED Insect Killer 19W LED Insect Killer 24W		FD496 (-E & -A) FD497 (-E & -A) FD498 (-E & -A)
Application of Territory Legislation & Council Directives(s) Toepassing van Europese Richtlijn(en) • Application de la/des directive(s) du Conseil • Anwendbare EU-Richtlinie(n) • Applicazione delle Direttive • Aplicación de la(s) directiva(s) del consejo • Aplicação de directiva(s) do Conselho	Low Voltage Directive (LVD) - 2014/35/EU Electrical Equipment (Safety) Regulations 2016 EN 60335-1:2012 +A11:2014 +A13:2017 EN 60335-2-59:2003 +A1:2006 +A2:2009 +A11:2018 EN 62233:2008	Electrical Safety IEC 60335-1:2010 +A1:2013 +A2:2016 IEC 60335-2-59:2002 +A1:2006 +A2:2009
	Electro-Magnetic Compatibility (EMC) Directive 2014/30/EU - recast of 2004/108/EC Electromagnetic Compatibility Regulations 2016 (S.I. 2016/1091) EN55014-1:2017 EN55014-2:2015 EN 61000-3-2: 2014 EN 61000-3-3: 2013	Electromagnetic Compatibility EN55014-1:2017 EN55014-2:2015 EN 61000-3-2: 2014 EN 61000-3-3: 2013
	Restriction of Hazardous Substances Directive (RoHS) 2015/863 amending Annex II to Directive 2011/65/EU Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012 (S.I. 2012/3032)	
Producer Name • Naam fabrikant • Nom du producteur • Name des Herstellers • Nome del produttore • Nombre del fabricante • Nome do fabricante		Eazyzap

I, the undersigned, hereby declare that the equipment specified above conforms to the above Territory Legislation, Directive(s) and Standard(s).

Ik, de ondergetekende, verklaar hierbij dat de hierboven gespecificeerde uitrusting goedgekeurd is volgens de bovenstaande Richtlijn(en) en Standaard(en).

Je soussigné, confirme la conformité de l'équipement cité dans la présente à la / aux Directive(s) et Norme(s) ci-dessus.

Ich, der/die Unterzeichnende, erkläre hiermit, dass das oben angegebene Gerät der/den oben angeführten Richtlinie(n) und Norm(en) entspricht. Il sottoscritto dichiara che l'apparecchiatura di sopra specificata è conforme alle Direttive e agli Standard sopra riportati.

El abajo firmante declara por la presente que el equipo arriba especificado está en conformidad con la(s) directiva(s) y estándar(s) arriba mencionadas.

Eu, o abaixo-assinado, declaro que o equipamento anteriormente especificado está em conformidade com a(s) anterior(es) Directiva(s) e Norma(s).

Date • Data • Date • Datum • Data •
Fecha • Data

Signature • Handtekening •
Signature • Unterschrift Firma •
Firma • Assinatura

Full Name • Volledige naam • Nom et prénom • Vollständiger Name •
Nome completo • Nombre completo •
Nome por extenso

Position • Functie • Fonction •
Position • Qualifica • Posición •
Função

Producer Address • Adres fabrikant • Adresse du producteur • Anschrift des Herstellers • Indirizzo del produttore • Dirección del fabricante •
Morada do fabricante

28th April 2021

DocuSigned by:

Ashley Hooper
B39382C9FD9C478...

DocuSigned by:

Eoghan Donnellan
D352874F7FAB460...

DocuSigned by:

Josie Holt
3582E210C4054DA...

Ashley Hooper

Eoghan Donnellan

Josie Holt

Technical & Quality
Manager

Commercial
Manager/ Importer

Commercial Manager/ Responsible
Supplier

Fourth Way,
Avonmouth,
Bristol,
BS11 8TB
United Kingdom

Unit 9003
Blarney Business Park
Blarney
Co. Cork, Ireland

15 Bagdally Road,
Campbelltown
NSW 2560





FD496-A-FD497-A-FD498-A_A5_v2_2022/07/05