

SPECIFICATION

Device Name : IGBT Module

Type Name : 1MB1600PX-120-03

Spec. No. : MS5F4504

This material and the information herein is the property of Fuji Electric Co.Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party, nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

Fuji Electric Co., Ltd.
Matsumoto Factory

		DATE	NAME	APPROVED	Fuji Electric Co.,Ltd.		
DRAWN	Jan. - 21 - '99	J. Hayauma			DWG. NO.	MS5F4504	1/8
CHECKED	Jan. - 22 - '99	J. Isono		J. Isono			
							a

Revised Records

[illegible]

This material and the information herein is the property of Fuji Electric Co. Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co. Ltd.

Fuji Electric Co., Ltd.

DWG.NO.:

MS5F4504

 $\frac{2}{8}$


A

H04-004-06


1MBI600PX-120-03

1. Outline Drawing

Unit : mm

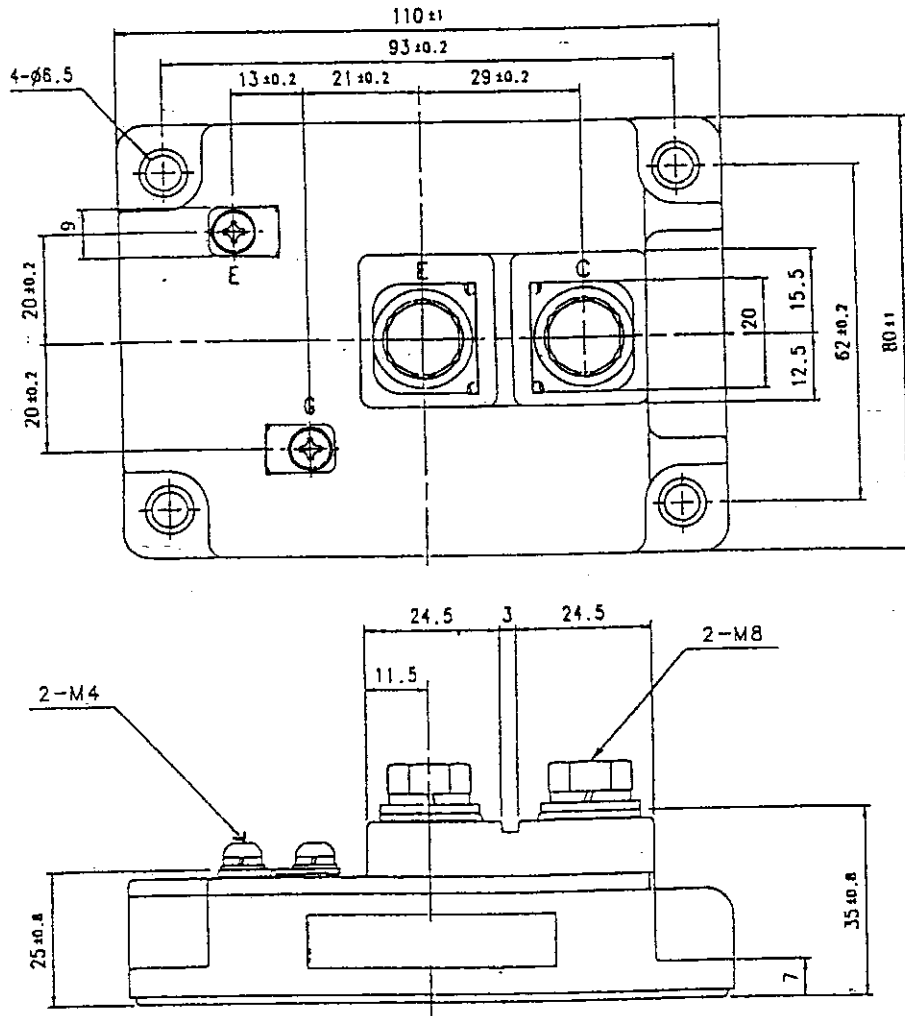

2. Equivalent circuit

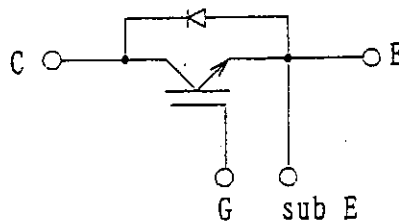

Fuji Electric Co.,Ltd.

DWG NO.

MS5F4504

3/8

1a

H04-004-03

3. Absolute Maximum Ratings (at Tc=25°C unless otherwise specified)

Items			Symbols	Ratings	Units
Collector-Emitter voltage			V _{CE}	1200	V
Gate-Emitter voltage			V _{GE}	±20	V
Collector current	Continuous	T _C =25℃	I _C	800	A
		T _C =80℃		600	
	1ms	T _C =25℃	I _C pulse	1600	
		T _C =80℃		1200	
			-I _C	600	
	1ms		-I _C pulse	1200	
	Max. power dissipation			P _C	
Operating temperature			T _j	+150	℃
Storage temperature			T _{stg}	-40~+125	℃
Isolation voltage (rms) #4			V _{is}	AC 2500 (1min.)	V
Screw torque			Mounting #1	4.5	N · m
			Terminals #2	11.0	
			Terminals #3	1.7	

Note : #1 Recommendable value : 4.0±0.5 N·m (M6) #4: All terminals should be connected together when isolation test will be done.
 Note : #2 Recommendable value : 10.0±1.0 N·m (M8)
 Note : #3 Recommendable value : 1.50±0.2 N·m (M4)

4. Electrical characteristics (at Tj=25°C unless otherwise specified)


Items	Symbols	Characteristics			Conditions	Units
		min.	typ.	max.		
Zero gate voltage Collector current	I _{CE}	—	—	0.5	V _{GE} =0V, V _{CE} =1200V	mA
Gate-Emitter leakage current	I _{GES}	—	—	±0.5	V _{CE} =0V, V _{GE} =±20V	μA
Gate-Emitter threshold voltage	V _{GE(th)}	6.0	8.0	9.0	V _{CE} =20V, I _C =600mA	V
Collector-Emitter saturation voltage	V _{CE(sat)}	—	2.85	3.2	V _{GE} =15V, I _C =600A	V
Input capacitance	C _{ies}	—	60	—	V _{GE} =0V	nF
Output capacitance	C _{oes}	—	9	—	V _{CE} =10V	
Reverse transfer capacitance	C _{res}	—	4	—	f=1MHz	
Turn-on time	t _{on}	—	750	1200	V _{CC} =600V	ns
	t _r	—	200	600	I _C =600A	
Turn-off time	t _{off}	—	650	1000	V _{GE} =±15V	
	t _f	—	100	300	R _G =2.0Ω	
Diode forward on voltage	V _F	—	—	3.4	I _F =600A, V _{GE} =0V	V
Reverse recovery time	t _{rr}	—	—	350	I _F =600A	ns

5. Thermal resistance characteristics

Items	Symbols	Characteristics			Conditions	Units
		min.	typ.	max.		
Thermal resistance	R _{th(j-c)}	—	—	0.03	IGBT	°C/W
	R _{th(j-c)}	—	—	0.06	Diode	
	※	—	0.0063	—	the base to cooling fin	
	R _{th(c-f)}	—	—	—	—	

※ This is the value which is defined mounting on the additional cooling fin. with thermal compound.

6. Indication module (モジュール表示)

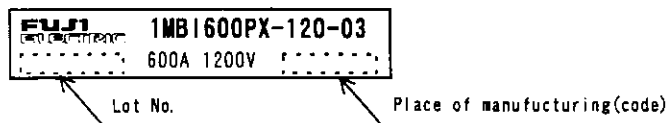

7. Applicable category (適用範囲)

This specification is applied to IGBT module named 1MBI600PX-120-03.
本納入仕様書は、IGBTモジュール 1MBI600PX-120-03 に適用する。

8. Storage and transportation notes (保管, 運搬上の注意事項)

- This IGBT module should be stored at a standard temperature of 5 to 35℃ and humidity of 45% to 75%.
常温保存が望ましい。
- Store modules in a place with few temperature changes in order to avoid condensation on the module surface.
急激な温度変化の無きこと。(モジュール表面が結露しないこと)
- Avoid exposure to corrosive gases and dust.
腐蝕性ガスの発生場所、塵埃の多い場所は避けること。
- Avoid excessive external force on the module.
製品に荷重がかからないように十分注意すること。
- Store modules with unprocessed terminals.
モジュールの端子は未加工の状態で保管すること。
- Do not drop or otherwise shock the modules when transporting.
製品の運搬時に衝撃を与えたり、落下させたりしないこと。

9. Specification of solder void. (半田ボイドの仕様)

- Under chips. (チップ下) : $\leq 5\%$ (5%以下)
- Under DBCs of chip area. (チップ直下の範囲のDBC下) : $\leq 10\%$ (10%以下)
- Under DBCs ~~except chip area.~~ (チップ直下以外の範囲のDBC下) : $\leq 10\%$ (10%以下)

10. Specification of Soldering.

- Vacuum soldering.

Fuji Electric Co.,Ltd

DWG.NO.







MS574504

5/8







a

H04-004-03



Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party, nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

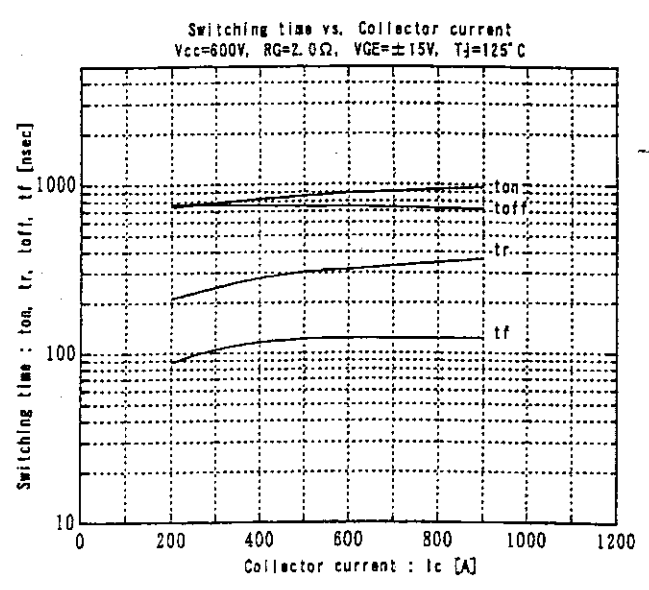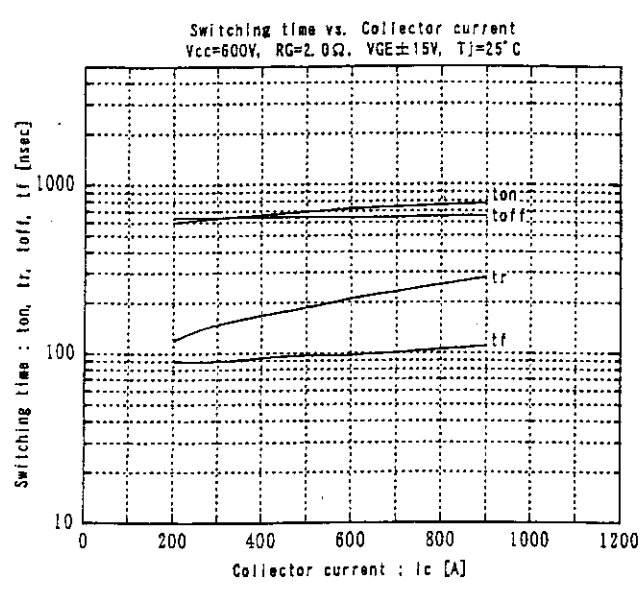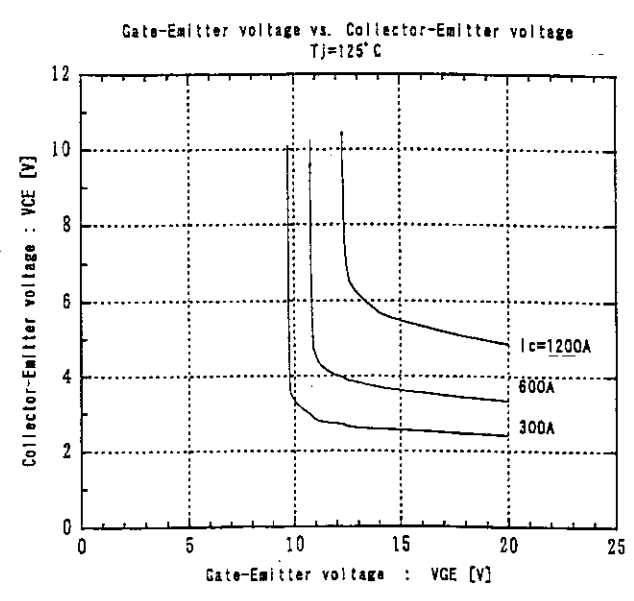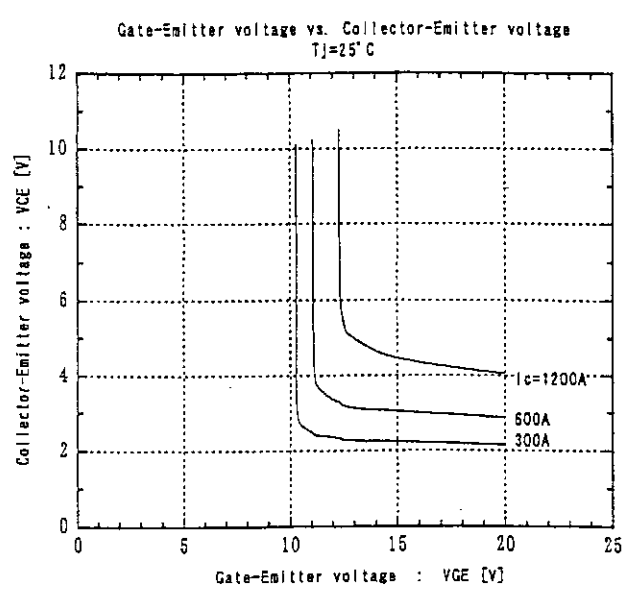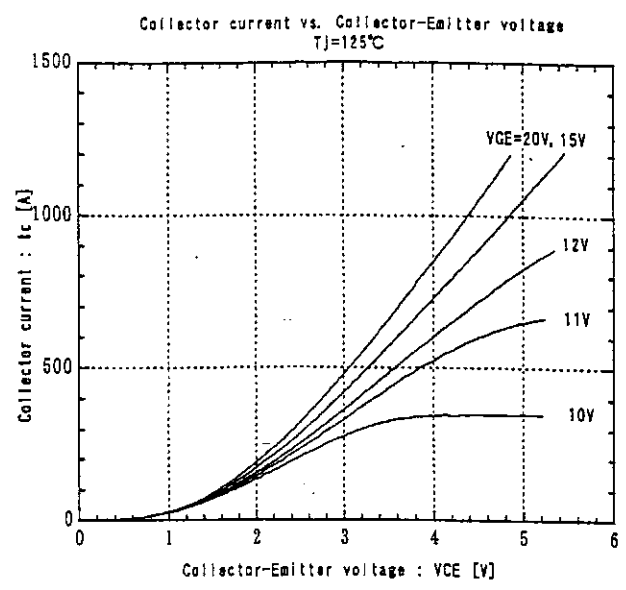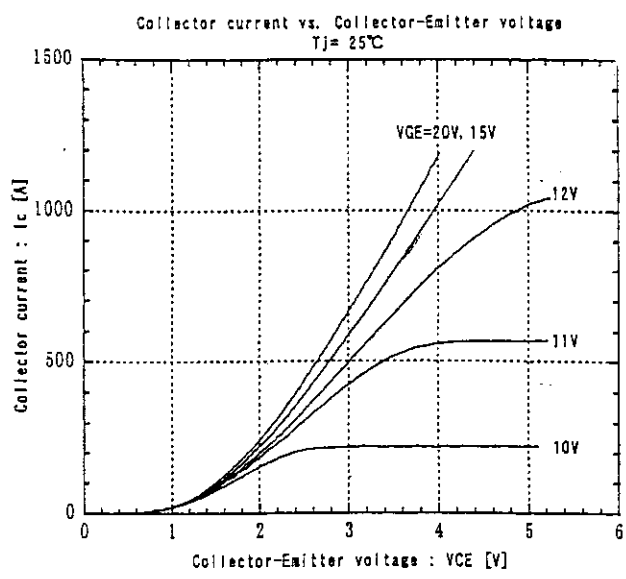

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party, nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

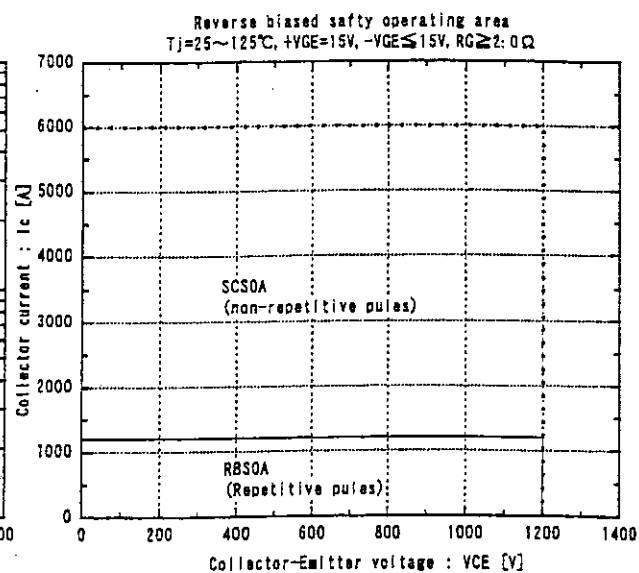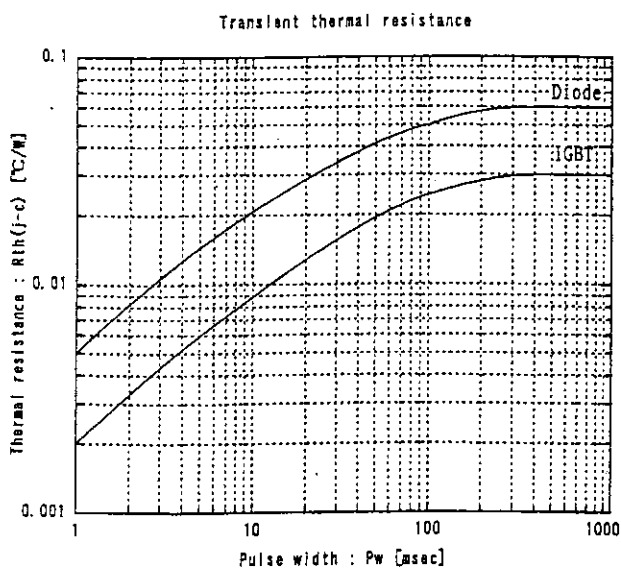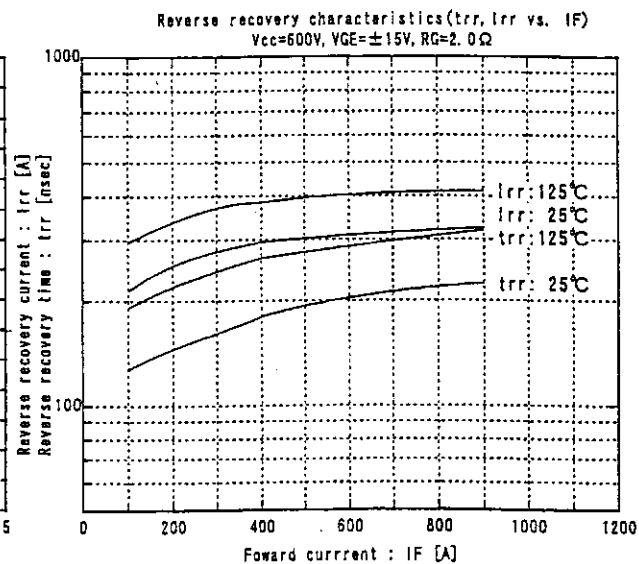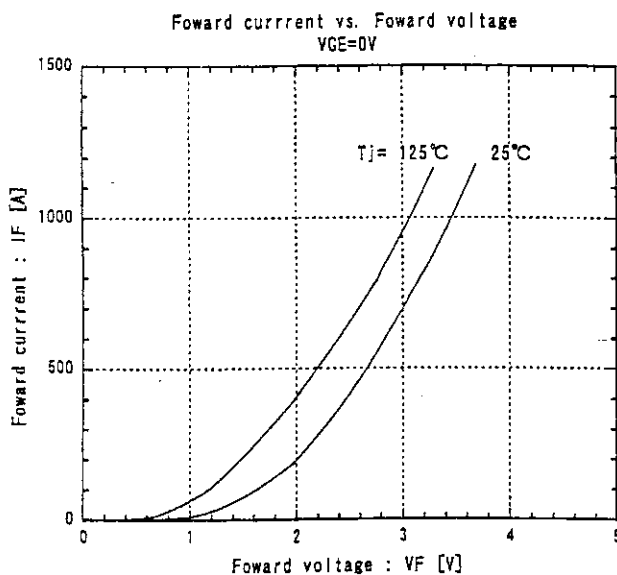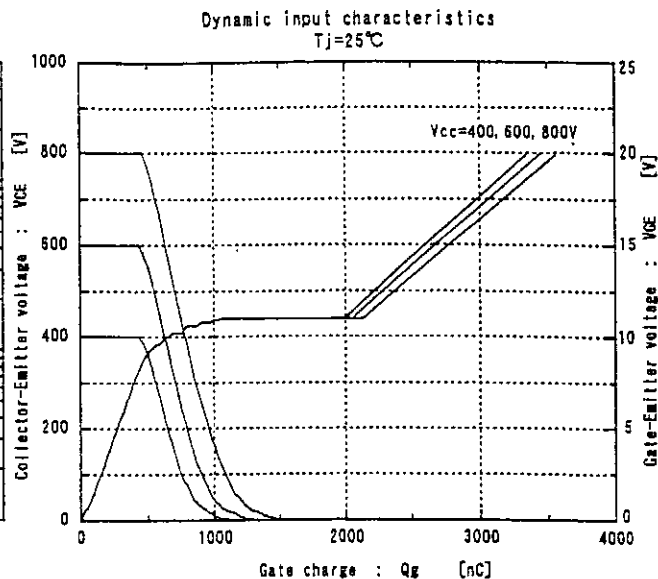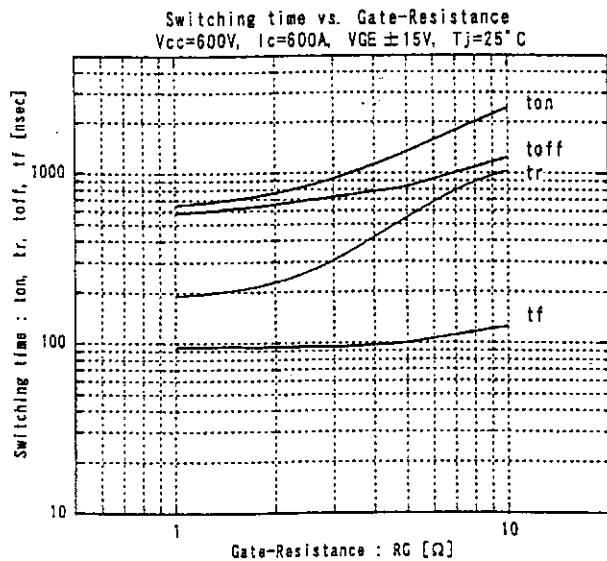

These drawings and the enclosed data are the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party, nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

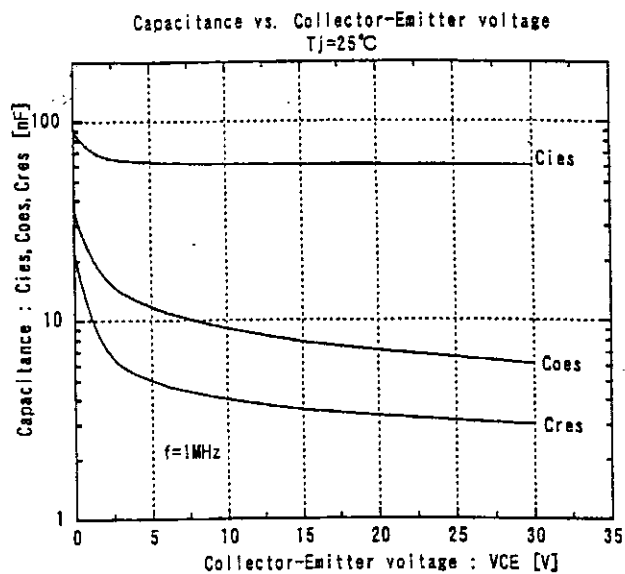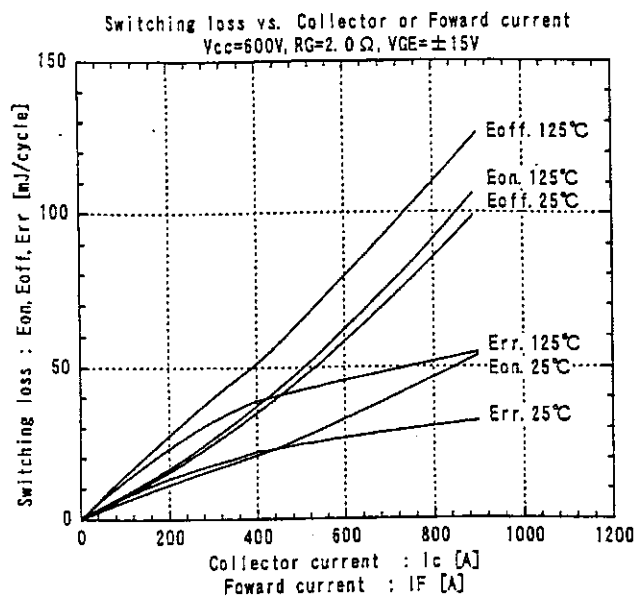

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.