


FEATURES

- Hermetically Sealed Case
- High Reliability Device
- Low Forward Power Loss, High Efficiency
- High Surge Capability
- 30 Volts through 60 Volts Types Available

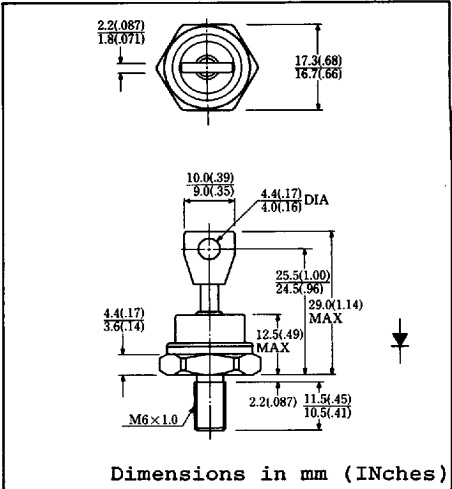

Approx. Net Weight : 18 Grams

MAXIMUM RATINGS

Voltage Rating	TYPE Symbol	61MQ40	---	Unit
Repetitive Peak Reverse Voltage	V_{RRM}	40	---	V
Non-Repetitive Peak Reverse Voltage	V_{RSM}	45	---	V
Electrical Rating	Symbol	Condition	Rating	Unit
Average Rectified Output Current	I_O	180° rectangular wave conduction $T_C = 74^{\circ}C$	66	A
		180° sinusoidal wave conduction $T_C = 86^{\circ}C$	60	
RMS Forward Current	$I_{F(RMS)}$		94	A
Peak One-cycle Forward Surge Current	I_{FSM}	50Hz half sine wave, non-repetitive	800	A
Operating Junction Temperature Range	T_{jw}		-40 to 125	°C
Storage Temperature Range	T_{stg}		-40 to 125	°C
Mounting Torque	F_{tor}	Base Hex (recommend torque)	2.4 (24.5)	N•m (kgf•cm)
		Stud Nut (recommend torque)	1.6 (16.3)	

ELECTRICAL & THERMAL CHARACTERISTICS

Characteristics	Symbol	Test Condition	Max.	Unit
Peak Forward Voltage	V_{FM}	$I_{FM} = 60A$ $T_j = 25^{\circ}C$	0.58	V
Peak Reverse Current	I_{RM}	$V_{RM} = V_{RRM}$ $T_j = 25^{\circ}C$	40	mA
Thermal Resistance	$R_{th(j-c)}$	Junction to Case	0.75	°C/W
	$R_{th(c-f)}$	Case to Fin	0.25	



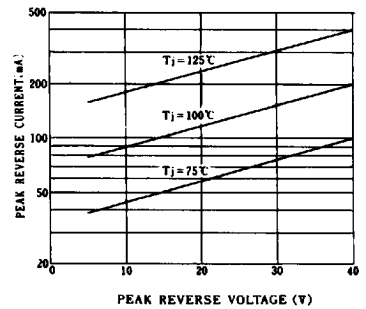


FIG.1-FORWARD VOLTAGE
VS. FORWARD CURRENTFIG.2-AVERAGE FORWARD POWER
DISSIPATIONFIG.3-PEAK REVERSE CURRENT
VS. PEAK REVERSE VOLTAGEFIG.4-AVERAGE REVERSE POWER
DISSIPATIONFIG.5-AVERAGE FORWARD CURRENT
VS. CASE TEMPERATURE

FIG.6-TRANSIENT THERMAL IMPEDANCE

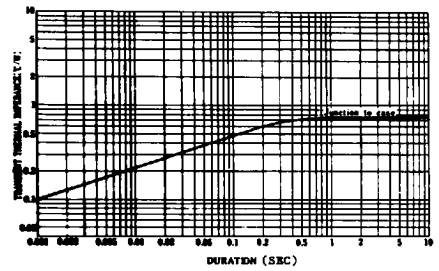
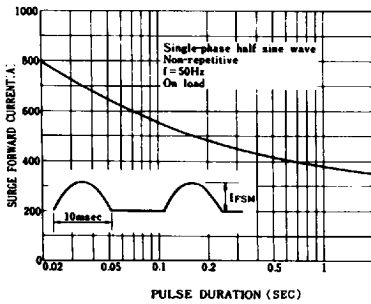
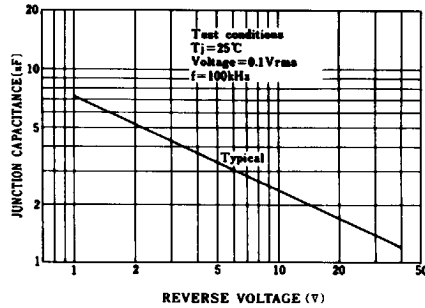


FIG.7-SURGE CURRENT RATINGS

FIG.8-JUNCTION CAPACITANCE
VS. REVERSE VOLTAGE

6615123 0001924 483