


CIRCUITS AND IDENTIFICATION

| | | Contact No. | Circuit | Circuit Conductor Colour |
|-------------------|------------------|-------------|---|--------------------------|
| 12 Pin Connector* | 7 Pin Connector* | 1 | Left-hand turn | Yellow |
| | | 2 | Reversing signal/Auxiliary circuit | Black |
| | | 3 | Earth return | White |
| | | 4 | Right-hand turn | Green |
| | | 5 | Service brakes | Blue |
| | | 6 | Stop lamps | Red |
| | | 7 | Rear lamps, clearance & side marker lamps | Brown |
| | | 8 | Battery supply | Orange |
| | | 9 | Fridge | Pink |
| | | 10 | Earth return | White |
| | | 11 | Brakesafe + Pos | Grey |
| | | 12 | Brakesafe - Neg | Violet |

NOTE: Always refer to wiring specifications of trailer braking system before connection of service brakes.




12 Pin Plug

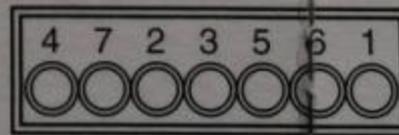

7 Pin Plug



12 Pin Socket

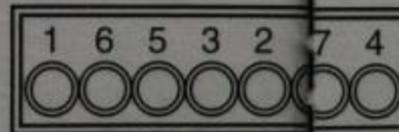

7 Pin Socket