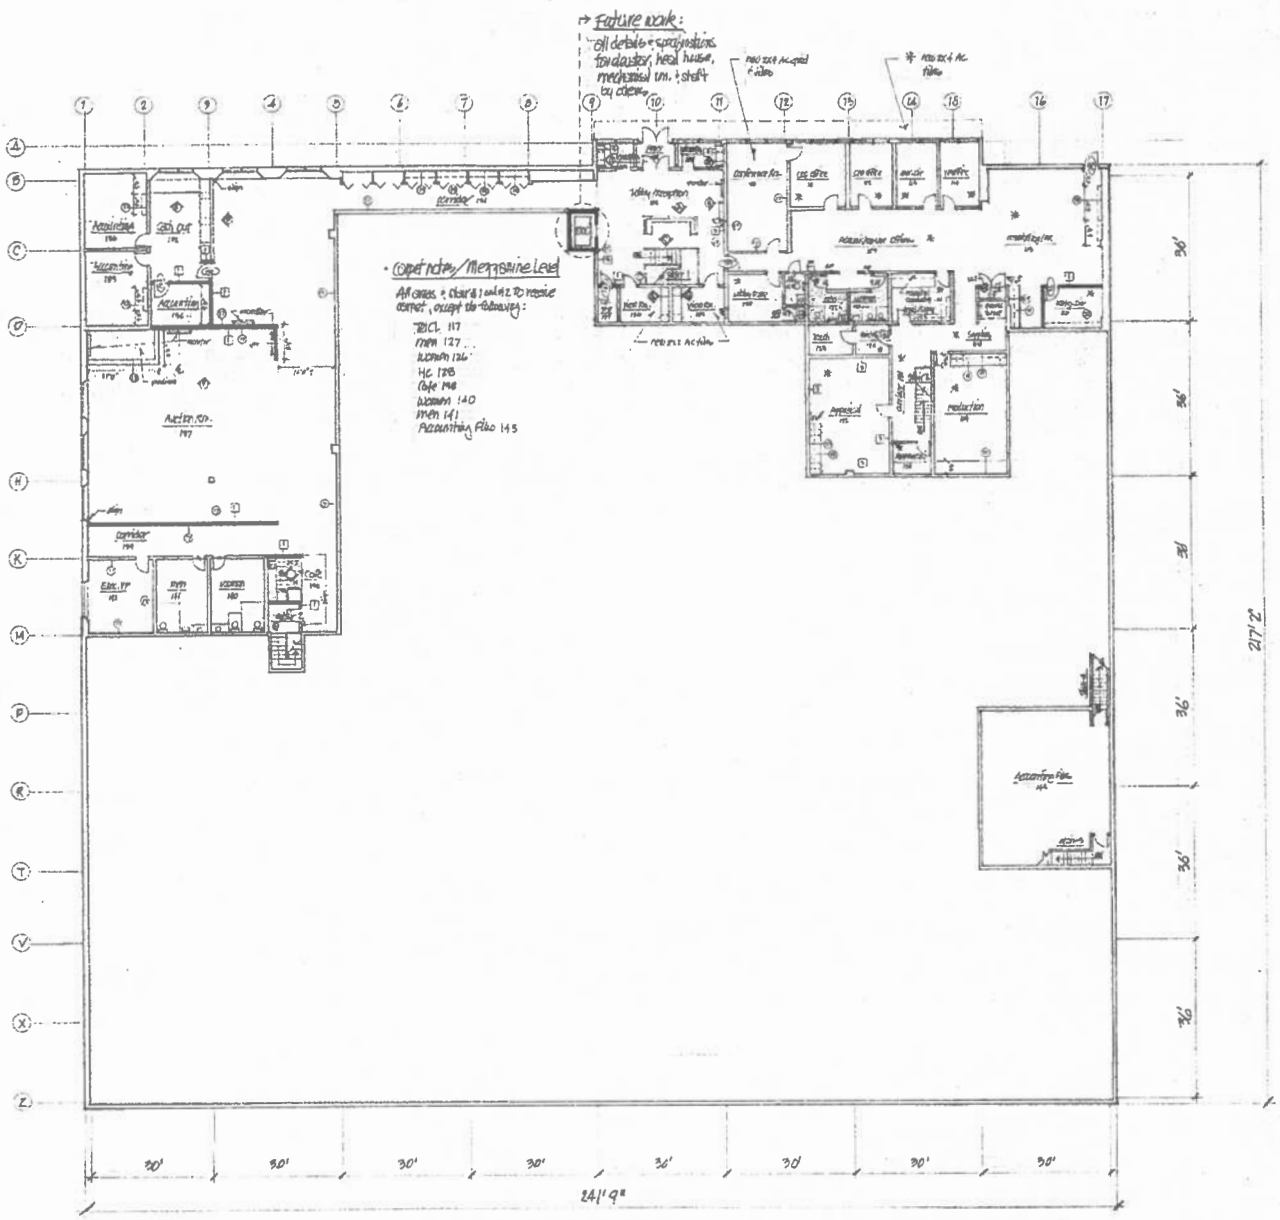


- Carpet note/Mezzanine Level

All areas + closets 1 and 2 to receive carpet, except the following:

Elev. 117
Men 127
Women 126
HC 128
Cafe 148
Women 140
Men 141
Accounting Files 145

Mezzanine Level Floor Plan

scale: 1/16" = 1'0"

Partition Types:

1 3-5/8" 25 gauge metal studs, 16" o.c. with lateral bracing 4' o.c. 5/8" GWB both sides. Blocking as required

2 3-5/8" metal studs, 16" o.c. 5/8" GWB one side. Blocking as required

3 Metal furring channel 5/8" GWB one side. Blocking as required

4 Metal furring channel insulation 5/8" GWB one side

5 Full height at high bay: 6" 20 gauge metal studs, 16" o.c. with brace iron cross bracing at 5' intervals 5/8" GWB both sides. Blocking as required

Partition Details:

15 1/2" plywood, full height

16 1/2" plywood, full height 1/2" homosote, full height

Partition Sections:

Refer to Dwg. A-3

Door Schedule:

Unless otherwise indicated, existing work is to remain.


1. Relocate existing doors, frames and hardware to: #107, 216, 229, 241, 251, 307
2. Install existing door: #109
3. New doors:
   3'0" x 7'0" #116, 122, 134, 215, 230, 231, 238 231, 251
   6'0" x 7'0" #205, 243
   7'0" x 8'0" #234, 236, 244, 245, 254, 256, 270
4. Overhead coiling door with electric switch control: #244

N

Drawing A-1 Construction Plan
Scale 1/4"=1'0"
Date 9/17/08
Revisions

SKINNER INC.
274 Cedar Hill Street
Marlborough, MA 01752

Cleef Fagen Inc.
12 Post Street
Cambridge, MA
02139
T. 617-354-6800
F. 617-354-6810
E. fagen@cleefagen.com

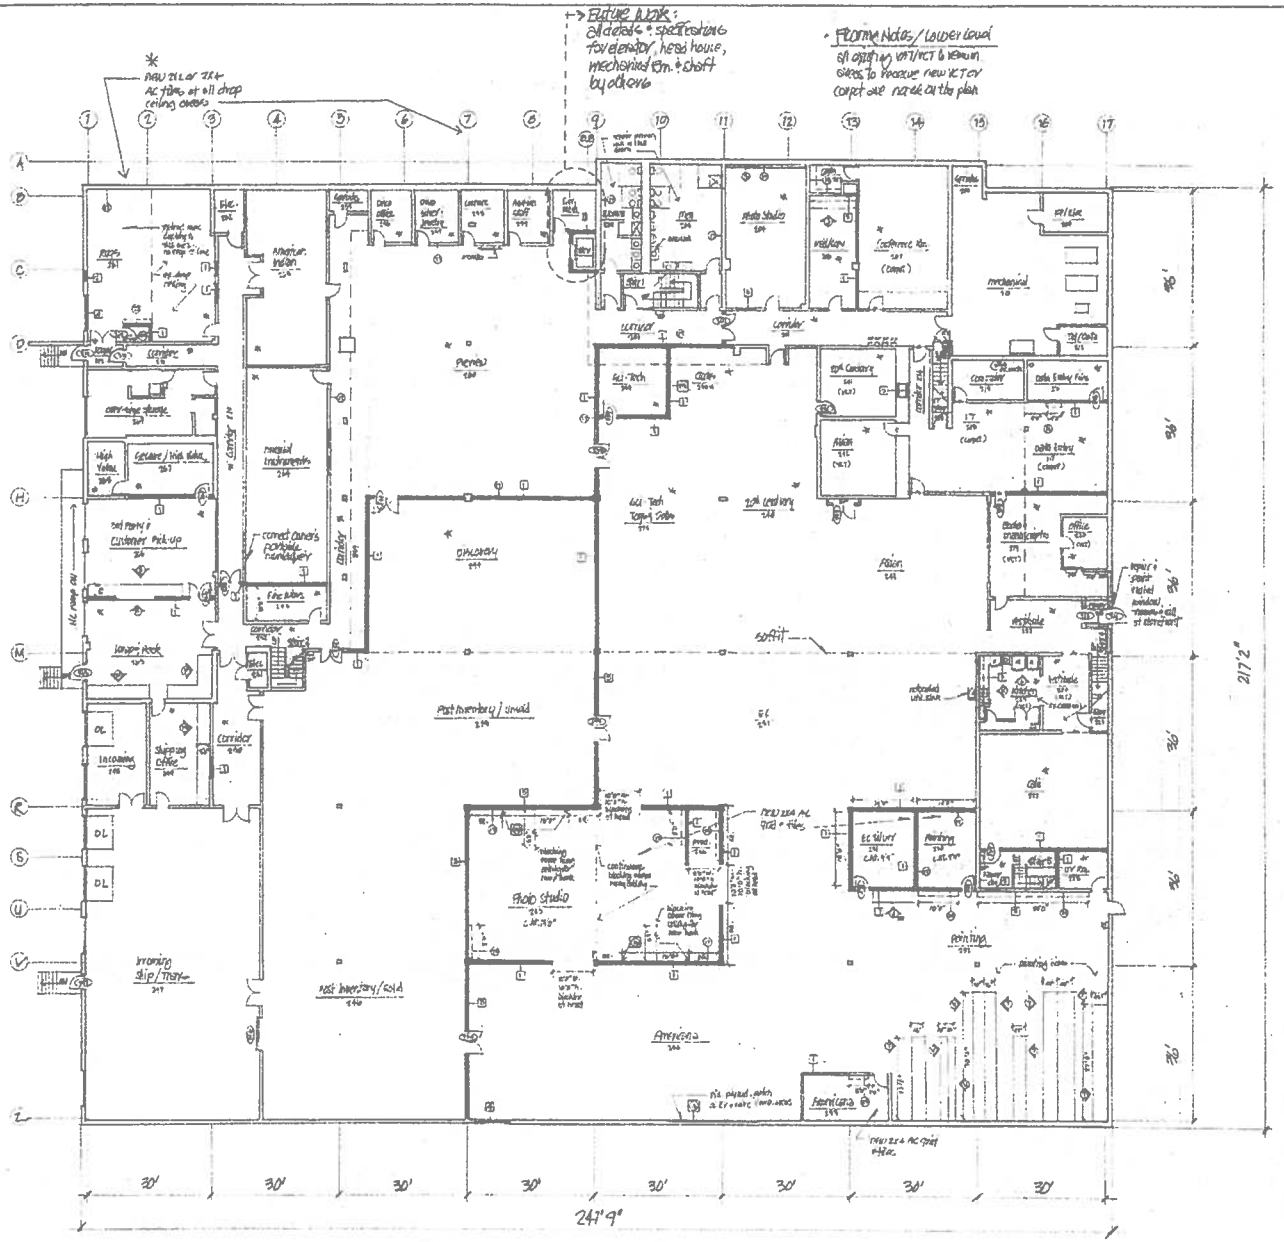

Drawing A-2 Construction Plan
Scale 1/16" = 1'0"
Date 9.17.08
Revisions

SKINNER INC.
274 Cedar Hill Street
Marlborough, MA 01752

Carol Fiore Inc.
12 Bow Street
Framingham, MA
01702
T
F
E
617.354.6500
617.354.6551
bpm@carolfiore.net