


# Lubrication Points

For the details of lubrication points and types of lubricants to be applied, refer to the Illustrated Index and various work procedures (such as Assembly/Reassembly, Replacement, Overhaul, Installation, etc.) contained in each section.

No.	LUBRICATION POINTS	LUBRICANT
1	Engine	API Service Grade: Use "Energy Conserving II" SG or SH grade oil SAE 5 W-30 preferred You can also use an oil a container that bears API CERTIFICATION mark. SAE Viscosity: See chart below.
2	Transmission Manual Automatic	API Service Grade: SF or SG SAE Viscosity: 10 W-30 or 10 W-40 Honda Premium Formula Automatic Transmission Fluid or an equivalent DEXRON® II Automatic Transmission Fluid (ATF)
3	Brake Line	Brake fluid DOT3 or DOT4
4	Clutch Line	Brake fluid DOT3 or DOT4
5	Power steering gearbox	Steering grease P/N 08733-B070E
6	Shift lever pivots (Manual transmission)	Grease with molybdenum disulfide
7	Release fork (Manual transmission)	Super High Temp Urea grease (P/N 08798-9002)
8 9 10 11 12 13 14 15 16 17 18 19 20 21	Steering boots Throttle cable end Steering ball joints Select lever (Automatic transmission) Pedal linkage Intermediate shaft Brake master cylinder pushrod Trunk hinges Door hinges upper and lower Door opening detents Fuel fill lid Engine hood hinges and engine hood latch Clutch master cylinder pushrod Change rod joint (Manual transmission)	Multi-purpose grease
22	Caliper Piston seal, Dust seal, Caliper pin, Piston	Silicone grease
23	Power steering system	Honda power steering fluid-V
24	Differential	Differential oil: Hypoid gear oil classified API service GL4 or GL5 Viscosity: SAE 90: above 0°F (-18°C) SAE 80 W-90: below 0°F (-18°C)
25	Air conditioning compressor oil	ND-OIL8 (P/N 38899-PR7-A01) (For Refrigerant HFC-134a (R-134a))



API CERTIFICATION MARK

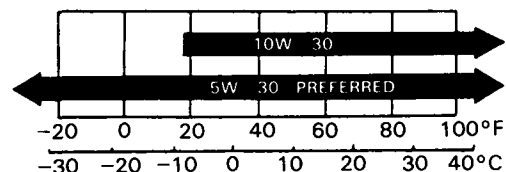

Engine oil viscosity for  
ambient temperature ranges

