


Front Seat

Removal

NOTE: Take care not to scratch the seat covers and body.

1. Remove the front seat in the numbered sequence.

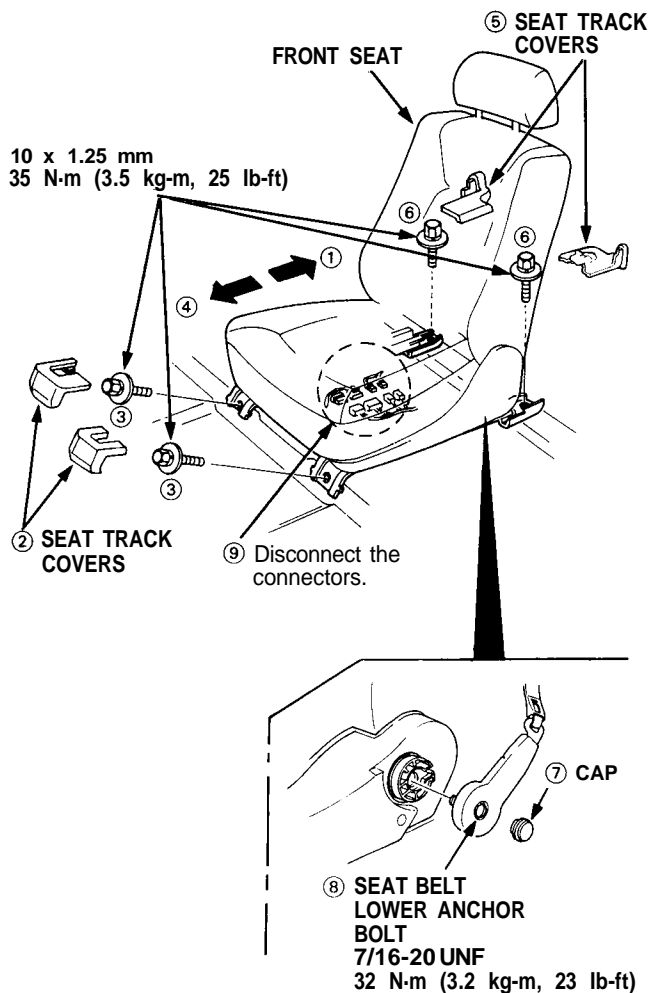

2. Installation is the reverse of the removal procedure.


NOTE: Make sure the connectors are connected properly.

Replacement

NOTE:

- Take care not to scratch the seat covers.
- Remove the front seat.

1. Remove the cushion front cover, recline cover and hight cover.

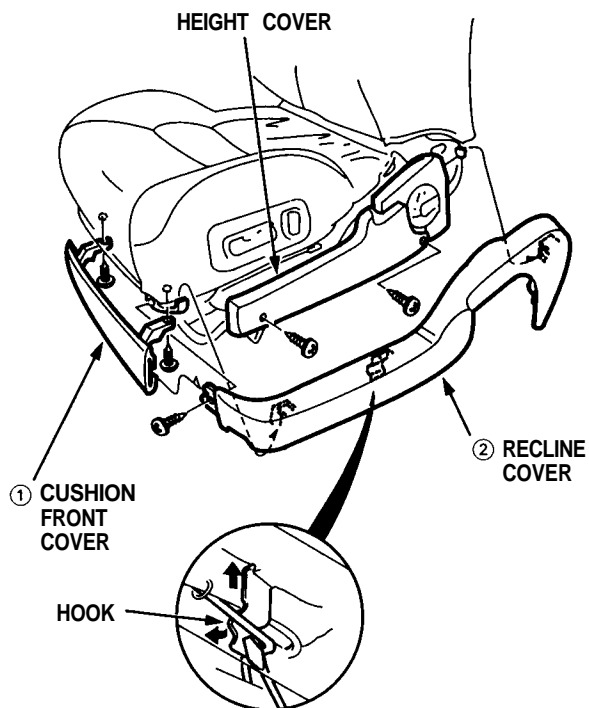

2. Pull the switch knobs. Remove the trim panel by sliding it forward. Remove the clips as shown.

NOTE: The clip installation is described on page [20-50](#).

