


Center Console

Replacement

1. To remove the center console, first remove the:
 - Center console panel (see page 20-75)
 - Center armrest (see page 20-75)
 - Stereo radio/cassette
 - Glove box lower panel (see page 20-79)
 - Glove box (see page 20-79)
 - Left glove box cover (see page 20-79)
 - Dashboard lower cover (see page 20-77)
2. Remove the 10 screws and four bolts, then remove the center console.

NOTE:

- Take care not to scratch the console and dashboard.
- Do not drop the screws and bolts inside the dashboard.

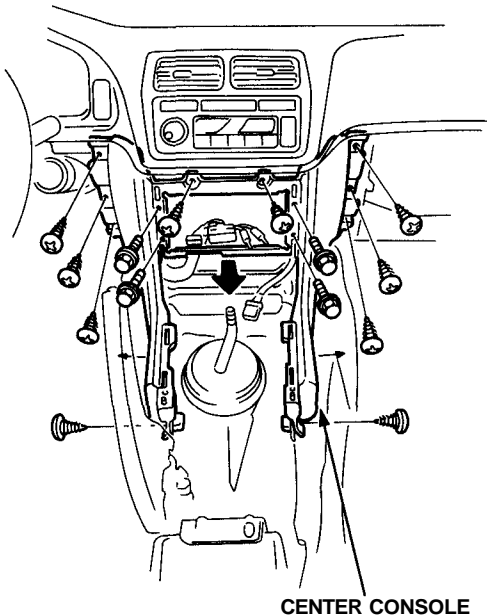

3. Installation is the reverse of the removal procedure.

Stereo Radio/Cassette

Replacement

NOTE: The original radio has a coded theft protection circuit. Be sure to get the customer's code number before — disconnecting the battery.
— removing the No. 56 (7.5 A) fuse from the under-hood fuse/relay box.
— removing the radio.


After service, reconnect power to the radio and turn it on. When the word "CODE" is displayed, enter the customer's 5-digit code to restore radio operation.

1. Remove the center console panel (see page 20-75).
2. Remove the two mounting bolts, then disconnect the ground cable. Remove the stereo radio/cassette by pulling it out of the console.

NOTE:

- Do not drop the bolts inside the dashboard.
- Take care not to scratch the console and dashboard.

3. Disconnect the connectors.

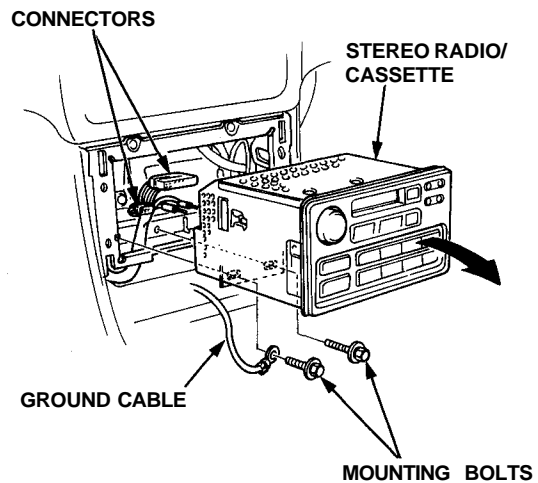

4. Installation is the reverse of the removal procedure.

NOTE: Before tightening the mounting bolts, make sure the harnesses are not pinched.