

- CERAMIC WALL TILE.
1. ALL KITCHENS TO HAVE TILE BACKSPLASH.
 2. TUB TO HAVE CERAMIC TILE SURROUND ON MOISTURE RESISTANT BOARD.


NOTE:
DETAIL REFERENCING
ON THIS UNIT IS
PROTOTYPICAL FOR
ALL UNITS.

COORDINATE KITCHEN MILLWORK
W/ MILLWORK SUPPLIER SHOP
DRAWINGS. ALL KITCHEN
MILLWORK TO INCLUDE A BANK
OF DRAWERS, AND 24" BUILT
OUT CABINETS OVER FRIDGE.

GRAB BAR BLOCKING IS TO BE
INSTALLED AS REQUIRED BY CODE
TO THE APPROPRIATE LOCATIONS

ROOM	ROOM AREA	GLAZING AREA	PERCENTAGE
LIVING/ DINING ROOM	169 sq. ft.	39.03 sq. ft.	23%
BEDROOM 1	117 sq. ft.	25.00 sq. ft.	21%
BEDROOM 2	92 sq. ft.	25.00 sq. ft.	27%

TYPICAL NOTE (SEE DETAILS):
STUD WALL REINFORCEMENT
(1) IF WOOD WALL STUDS OR SHEET STEEL WALL
STUDS ENCLOSE THE MAIN BATHROOM IN
A DWELLING UNIT, REINFORCEMENT SHALL BE
INSTALLED TO PERMIT THE FUTURE INSTALLATION OF
THE FOLLOWING:
(a) FOR A WATER CLOSET, A GRAB BAR DESCRIBED
IN CLAUSES 3.8.3.8.(3)(A) AND A GRAB BAR
DESCRIBED IN CLAUSE 3.8.3.8.(3)(C),
(b) FOR A SHOWER, A GRAB BAR DESCRIBED IN
CLAUSE 3.8.3.13.(2)(F), AND
(c) FOR A BATHTUB, A GRAB BAR DESCRIBED IN
CLAUSE 3.8.3.13.(4)(C).

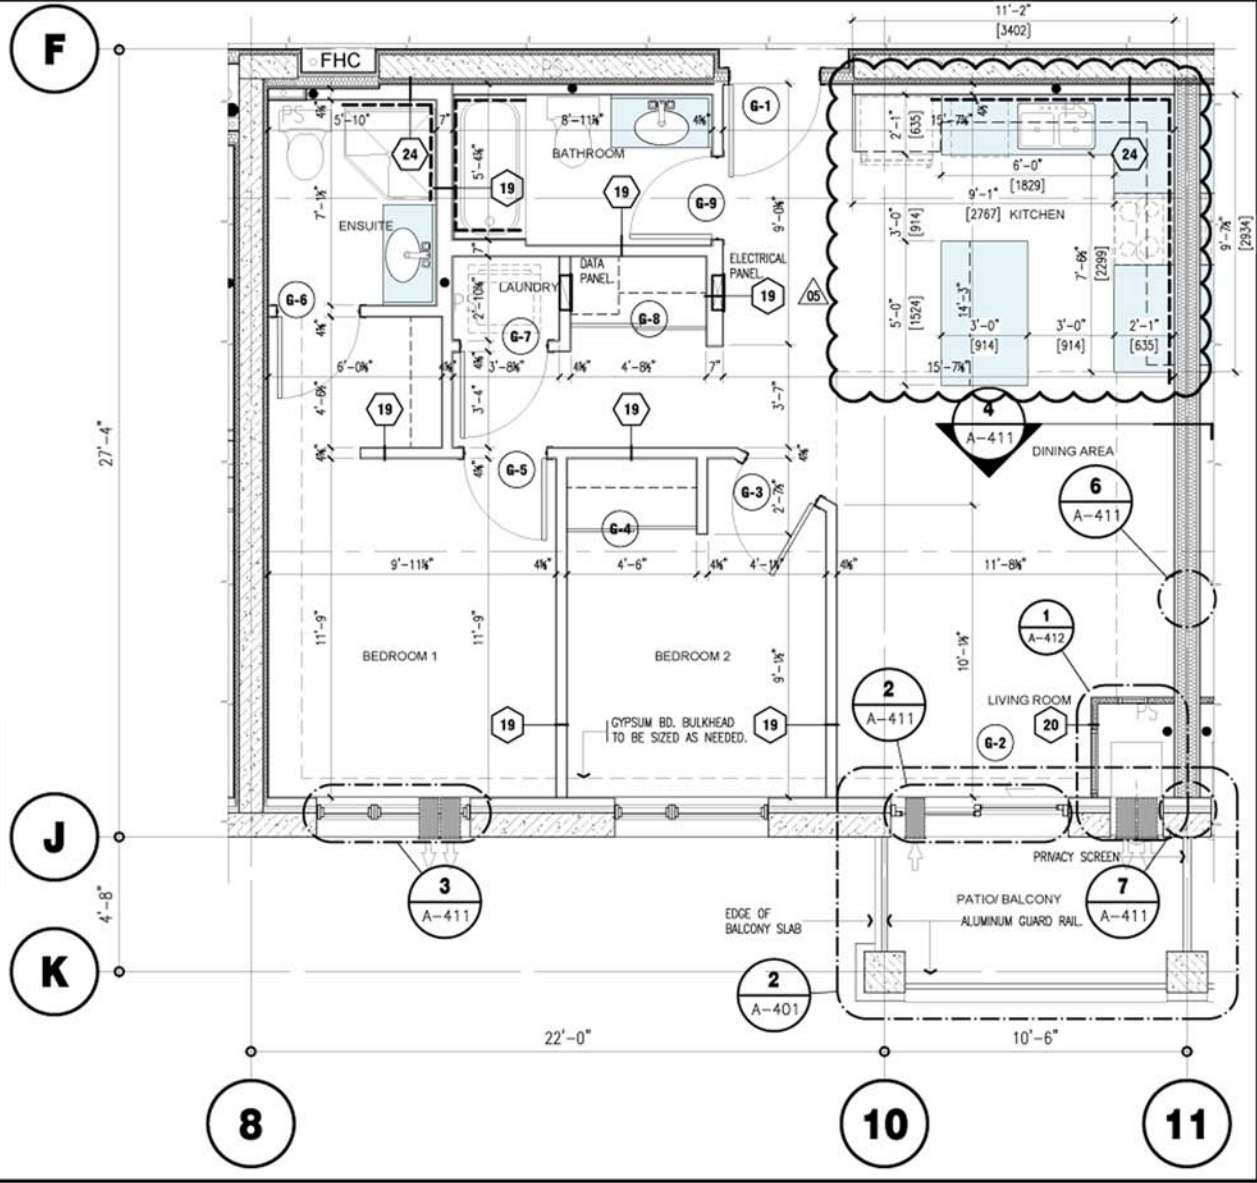

8 SUITE 'G' PLAN
scale: 1/4" = 1'-0"