



## Fan Control Unit

### Replacement

1. Remove the right door sill molding
2. Remove the small cover on the right kick panel.
3. Pull the carpet back to expose the \*ECM or PCM.
4. Remove the four nuts and ECM or PCM bracket, then disconnect the fan control unit connector.

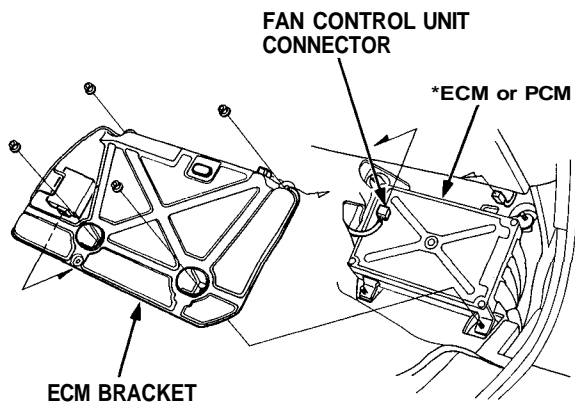

5. Remove the fan control unit from \*ECM or PCM bracket.

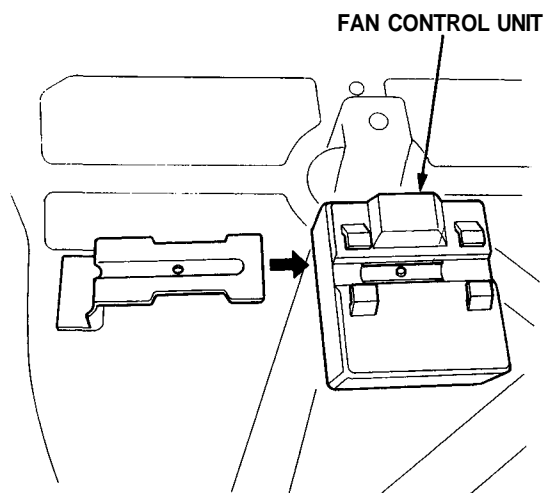

6. Install the fan control unit in the reverse order of removal.

\*ECM for M/T  
PCM for A/T

## Defroster Door

### Adjustment

Adjust the mode control motor rod so the linkage looks like this in the Defrost position.

