




Foot Well Light Replacement

Left Foot Well Light:

NOTE: The bulb or lens alone can be replaced without removing the dashboard lower cover.


1. Remove the dashboard lower cover (see page [23-79](#)).
2. Disconnect the 2-P connector from the foot well light.

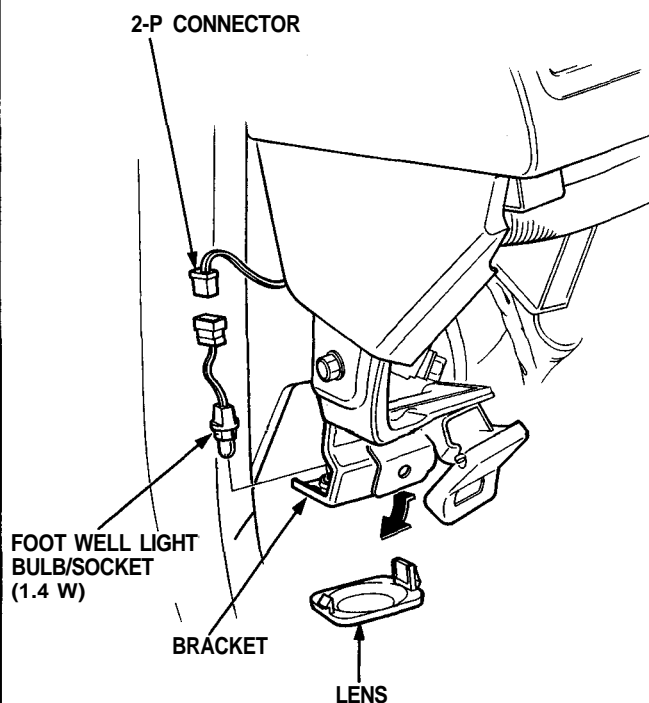

3. Remove the bulb/socket from the foot well light bracket.
4. Replace the foot well light bulb.

Right Foot Well Light (LS):

1. Remove the glove box lower panel.

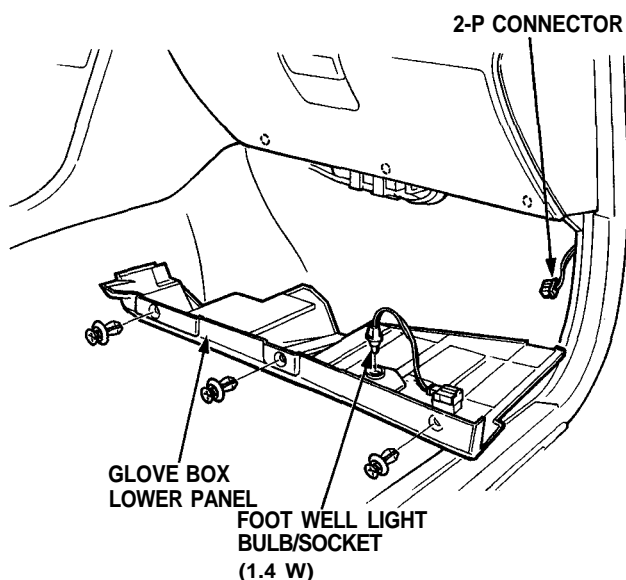

2. Disconnect the 2-P connector from the foot well light.
3. Remove the bulb/socket from the foot well light bracket.
4. Replace the foot well light bulb.