


# Stereo Sound System

## Unit Removal

### CAUTION:

- All SRS wiring harnesses are covered with yellow outer insulation.
- Before disconnecting any part of the SRS wire harness, install the short connectors (see page 23-409).
- Replace the entire affected SRS harness assembly if it has an open circuit or damaged wiring.

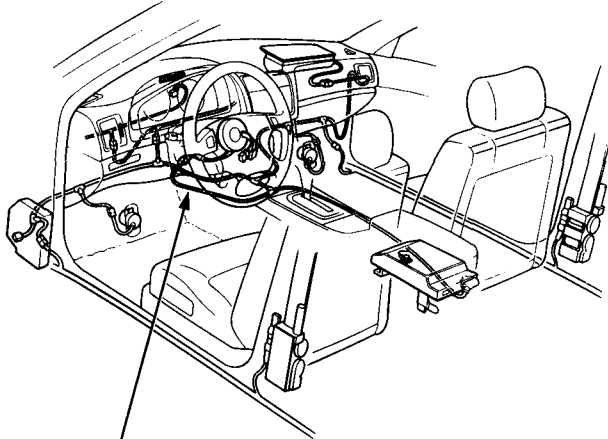


**SRS MAIN HARNESS**  
(Covered with yellow outer insulation)

**NOTE:** The original radio has a coded theft protection circuit. Be sure to get the customer's code number before


- disconnecting the battery.
- removing the No. 56 (7.5 A) fuse from the underhood fuse/relay box.
- removing the radio.

After service, reconnect power to the radio and turn it on. When the word "CODE" is displayed, enter the customer's 5-digit code to restore radio operation.

1. Remove the center console panel (see section 20).

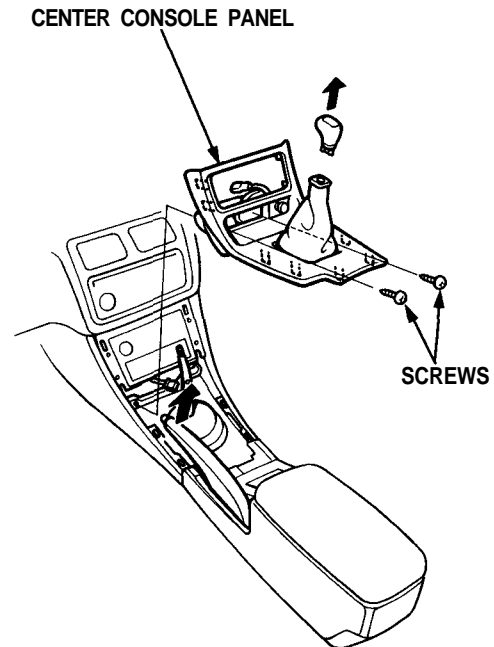

2. Remove the two mounting bolts, then disconnect the ground cable.
3. Pull out the stereo radio/cassette player.
4. Disconnect all connectors and antenna leads.

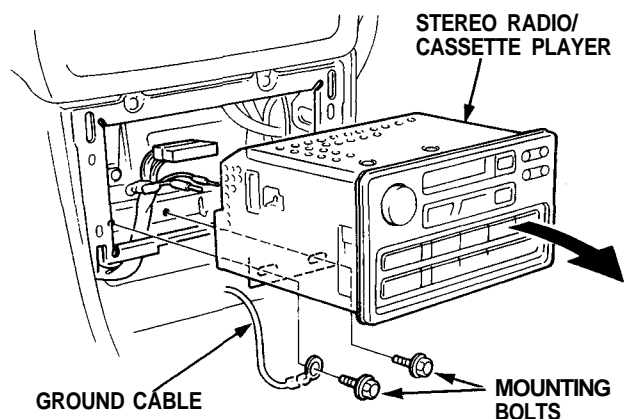

5. Install in the reverse order of removal.

**NOTE:** Before tightening the mounting bolts, make sure the harnesses are not pinched.