




SET/RESUME/CANCEL Switch Test

CAUTION: Disconnect both the negative and positive battery cables. Connect the short connector to the air-bag assembly (see page 23-409).


1. Disconnect the cable reel harness and main harness 7-P connector, and connect Test Harness C only to the cable reel harness side of the 7-P connector.

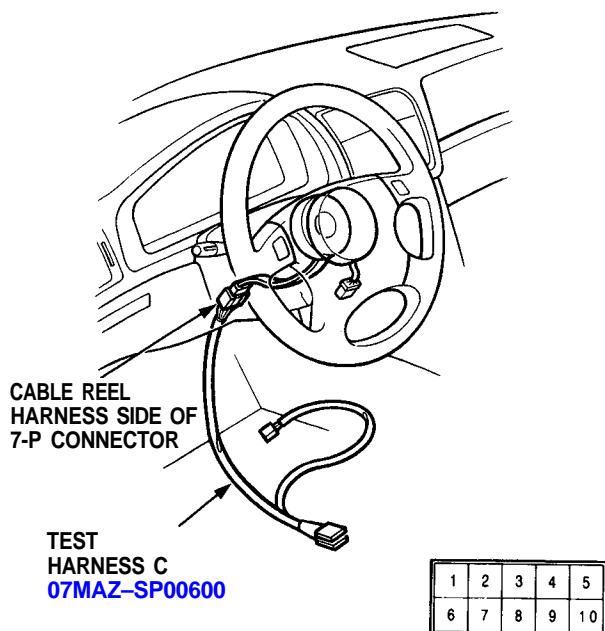

2. Check for continuity between the terminals in each switch position, according to the table.

Terminal Position	2 (BLU/RED)		1 (LT GRN/RED)	3 (LT GRN/BLK)
SET (ON)	○		○	
RESUME (ON)	○			○
CANCEL (ON)	○	→	○	○

3. Remove the switch cover from the SET/RESUME/CANCEL switch, then remove the SET/RESUME/CANCEL switch by removing the two screws.

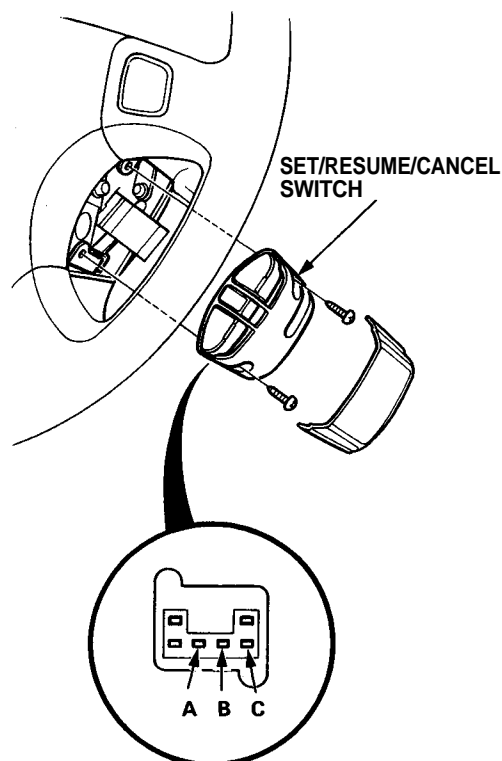

4. Check for continuity between the terminals in each switch position, according to the table.

Terminal Position	C		B	A
SET (ON)	○		○	
RESUME (ON)	○			○
CANCEL (ON)	○	→	○	○