





Tweeter Replacement

1. Remove the front ceiling light assembly (see page 23-201).
2. Remove the two screws, then disconnect the 4-P connector from the wire harness.

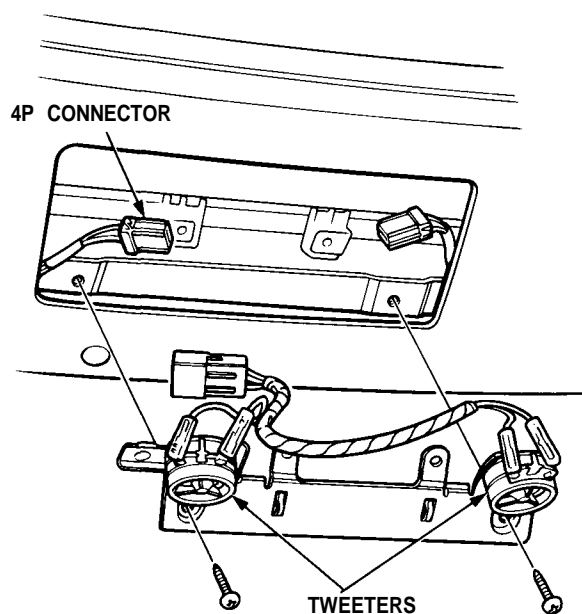


3. Disconnect the wires from the tweeter, then remove the screw.

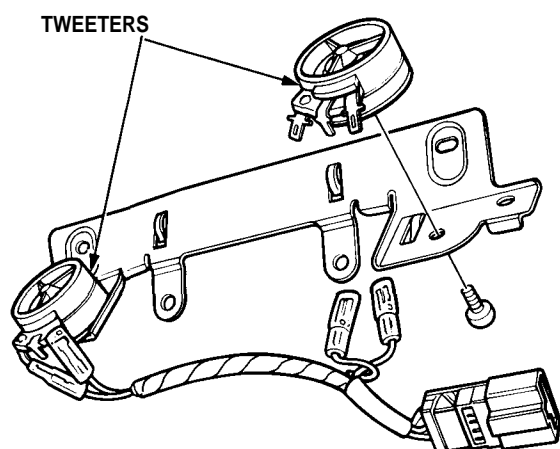

Amplifier Removal

1. Remove the rear seat.
2. Remove the three mounting bolts, then disconnect the 16-P connector, 5-P connector, and 7-P connector.
3. Take out the amplifier.

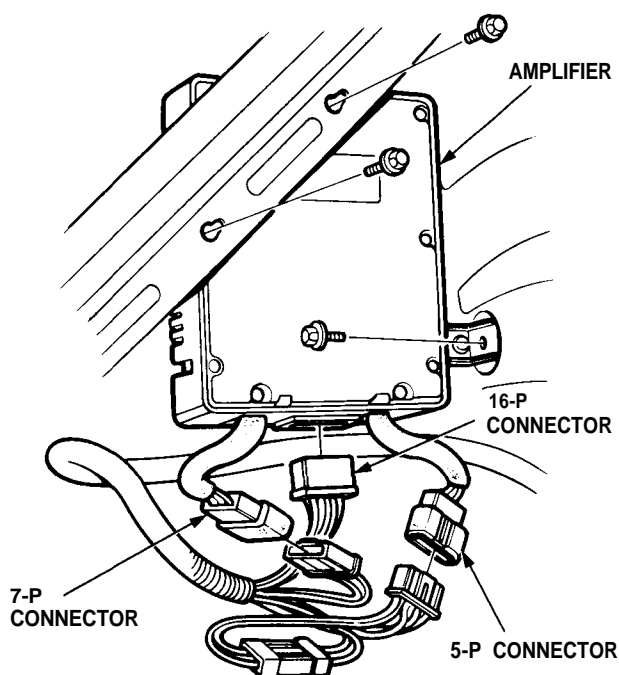

4. Install in the reverse order of removal.