

Doors

Outer Molding/Inner Molding Replacement


CAUTION: Wear gloves to remove and install the outer molding and inner molding.

1. Lower the glass fully.

NOTE:

- Take care not to twist or scratch the outer and inner moldings.
- The numbers after the part names show the quantities of the parts used.


Outer Molding:

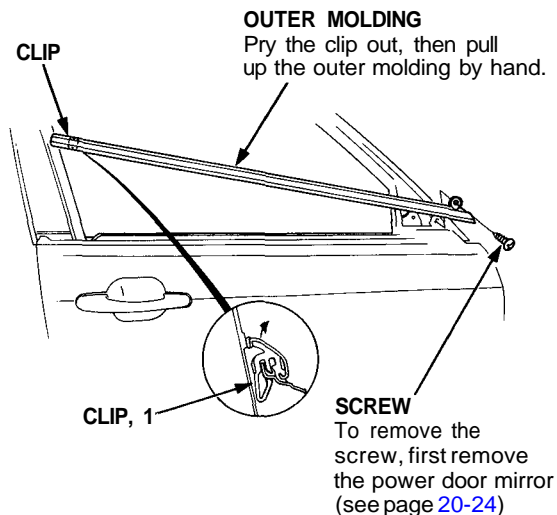

Inner Molding:

INNER MOLDING

- Remove the door panel (see page 20-4)
- Pry the clips out using a flat tip screwdriver, then pull up the inner molding.

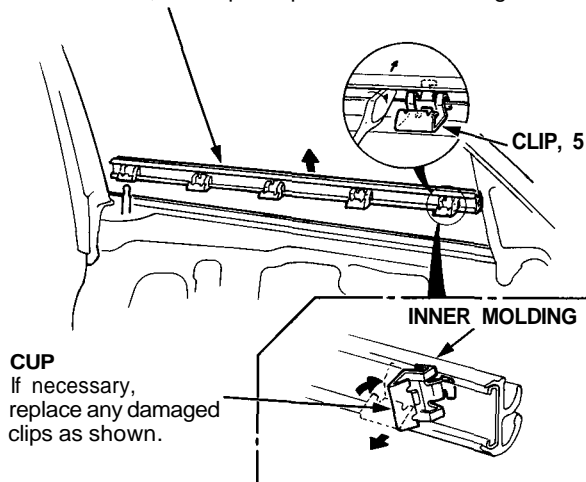


2. Installation is the reverse of the removal procedure.

Sash Trim Replacement

NOTE: Lower the glass fully.

1. Peel the outer weatherstrip out (see page 20-11), then remove the upper screw and loosen the other two screws.
2. Peel the glass run channel out and remove the screws, then remove the sash trim by hand.

NOTE: Take care not to scratch the sash trim.

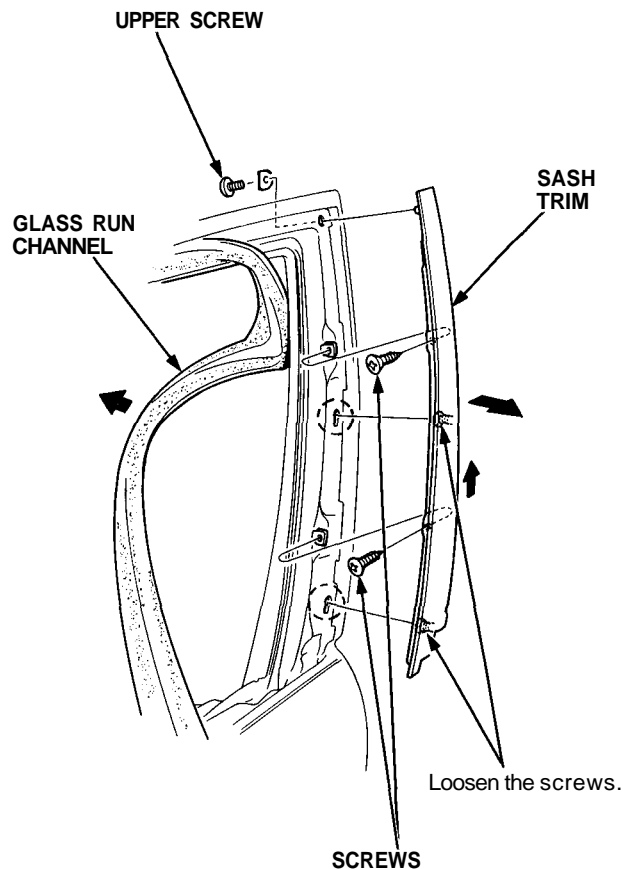

3. Installation is the reverse of the removal procedure.

NOTE:

- After installing, make sure the glass run channel is not twisted.
- Roll the glass up and down to make sure it moves freely without binding.