





8. Slide the sunshade forward, then remove it.

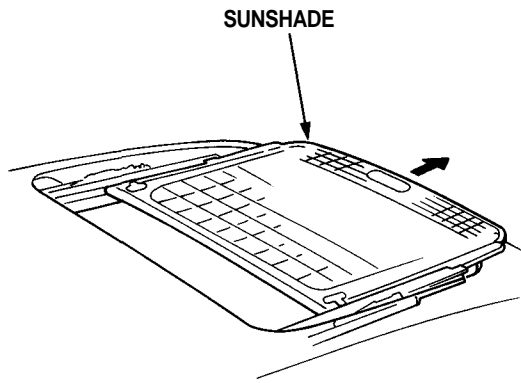

9. Install the sunshade in the reverse order of removal. Check for smooth movement the sunshade.

Guide Plate Replacement

1. Remove the glass bracket.
2. Pry the E-clips and remove the shafts, then separate the glass bracket and drain channel rod.

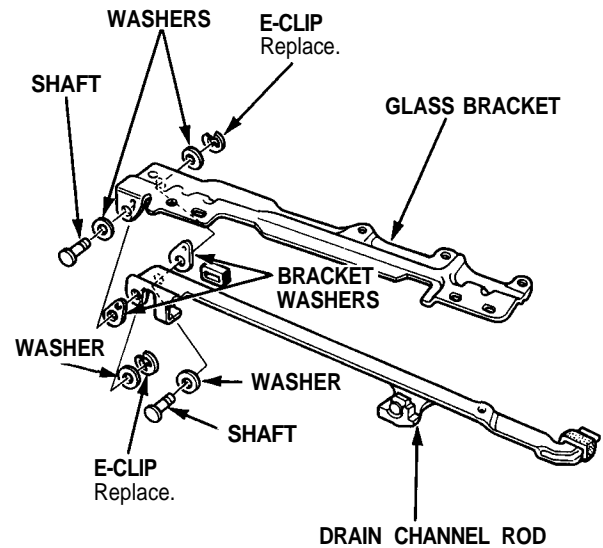

3. Remove the guide plate from the lift-up stopper.

