

Center Console


Replacement

1. To remove the center console, first remove the:
 - Center console panel
 - Center armrest
 - Stereo radio/cassette
 - Glove box lower panel (see page 20-77)
 - Glove box (see page 20-77)
 - Left glove box cover (see page 20-77)
 - Dashboard lower cover (see page 20-77)

2. Remove the center console.

NOTE:

- Take care not to scratch the center console and dashboard.
- Do not drop the screws and bolts inside the dashboard.

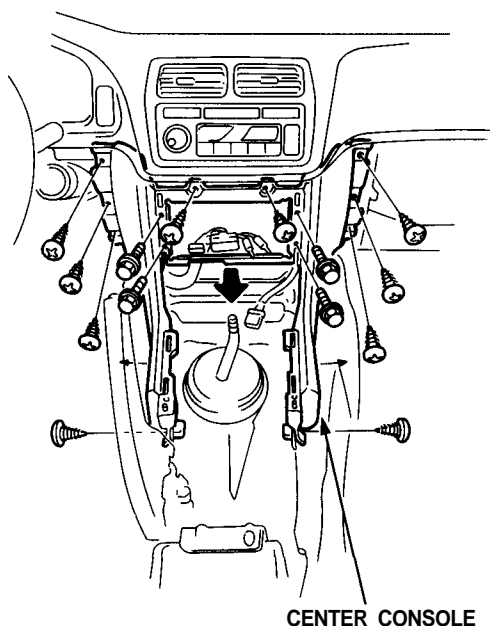

3. Installation is the reverse of the removal procedure.

Stereo Radio/Cassette

Replacement



NOTE: The L and LS model radios may have a coded theft protection circuit. Be sure to get the customer's code number before

- Disconnecting the battery.
- Removing the No. 56 (7.5 A) fuse in the under-hood fuse/relay box.
- Removing the radio.

After service, reconnect power to the radio and turn it on. When the word "CODE" is displayed, enter the customer's 5-digit code to restore radio operation.


1. Remove the center console panel.
2. Remove the two mounting bolts, then disconnect the ground cable. Remove the stereo radio/cassette by pulling it out.

CAUTION: When prying with a flat tip screwdriver, wrap it with protective tape to prevent damage.

NOTE:

- Do not drop the mounting bolts inside the dashboard.
- Take care not to scratch the center console and dashboard.

3. Disconnect the connectors.

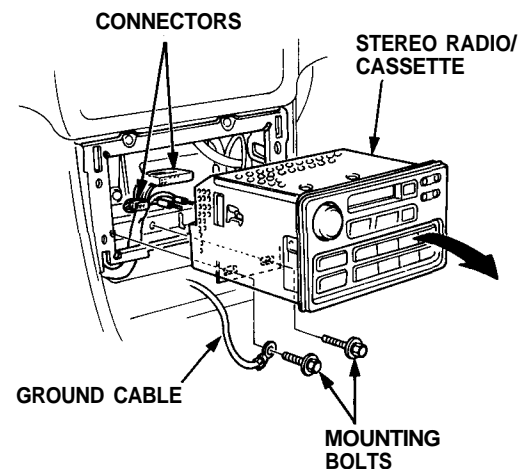

4. Installation is the reverse of the removal procedure.

NOTE: Before tightening the mounting bolts, make sure the harnesses are not pinched.