

# Stereo Sound System

## Component Location Index

### CAUTION:


- All SRS wiring harnesses are covered with yellow outer insulation.
- Before disconnecting any part of the SRS wire harness, install the short connectors (see page 23-407).
- Replace the entire affected SRS harness assembly if it has an open circuit or damaged wiring.

NOTE: The original radio has a coded theft protection circuit. Be sure to get the customer's code number before — disconnecting the battery.

— removing the No. 56 (7.5 A) fuse from the under-hood fuse/relay box.

— removing the radio.

After service reconnect power to the radio and turn it on. When the word "CODE" is displayed, enter the customer's 5-digit code to restore radio operation.

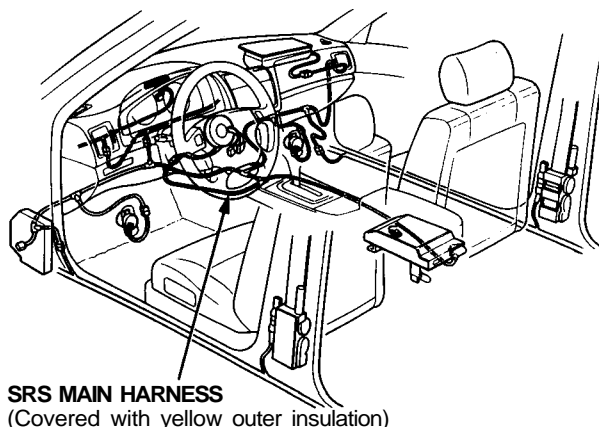

**SRS MAIN HARNESS**  
(Covered with yellow outer insulation)

**DOOR SPEAKERS/FRONT TWEETERS**  
Replacement, page 23-236

**REAR SPEAKERS**  
Replacement, page 23-237

**RADIO REMOTE SWITCH**  
Removal, page 23-235  
Test, page 23-235  
Cable Reel Test, page 23-234

**STEREO RADIO/  
CASSETTE PLAYER**  
Removal, page 23-228  
Terminals, page 23-223 ('91-'92) or  
23-229 ('93-'95)

**REAR TWEETERS**  
Replacement, page 23-237

**POWER ANTENNA MOTOR**  
Test, page 23-230  
Replacement, page 23-232

**AMPLIFIER**  
Terminals, page 23-231 ('91) or  
23-233 ('92-'95)  
Removal, page 23-232

