


Stereo Sound System

Unit Removal

CAUTION:

- All SRS wiring harnesses are covered with yellow outer insulation.
- Before disconnecting any part of the SRS wire harness, install the short connectors (see page 23-407).
- Replace the entire affected SRS harness assembly if it has an open circuit or damaged wiring.

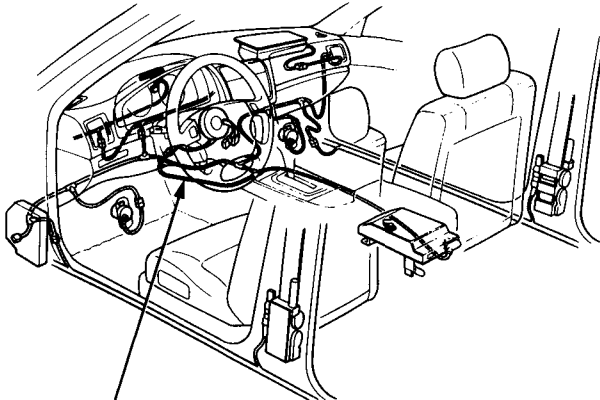


SRS MAIN HARNESS
(Covered with yellow outer insulation)


NOTE: The original radio has a coded theft protection circuit. Be sure to get the customer's code number before — disconnecting the battery.
— removing the No. 56 (7.5 A) fuse from the underhood fuse/relay box.
— removing the radio.

After service reconnect power to the radio and turn it on. When the word "CODE" is displayed, enter the customer's 5-digit code to restore radio operation.

1. Remove the center console panel (see [section 20](#)).

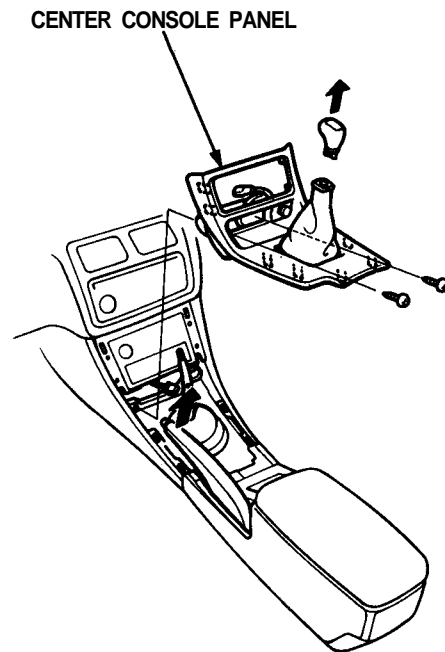

2. Remove the two mounting bolts, then disconnect the ground cable.
3. Pull out the stereo radio/cassette player.
4. Disconnect all connectors and antenna leads.

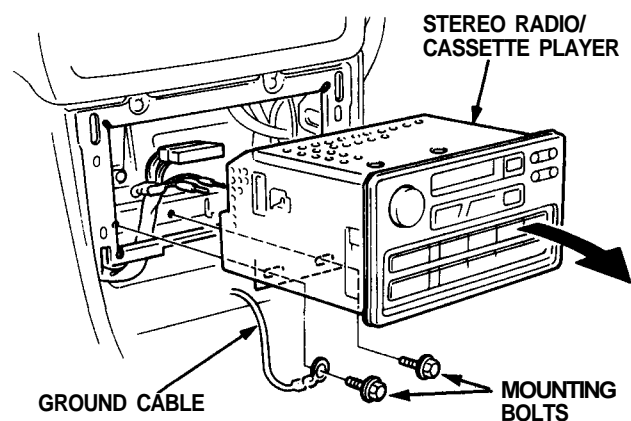

5. Install in the reverse order of removal.

NOTE: Before tightening the mounting bolts, make sure the harnesses are not pinched.