




Cruise Control

Component Location Index

CAUTION:

- All SRS wiring harnesses are covered with yellow outer insulation.
- Before disconnecting any part of the SRS wire harness, install the short connectors (see page 23-407).
- Replace the entire affected SRS harness assembly if it has an open circuit or damaged wiring.

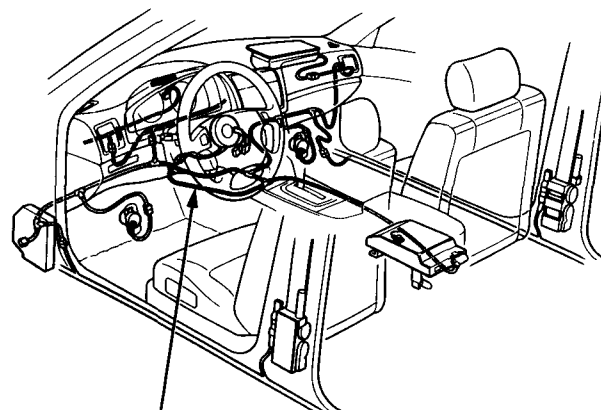

SRS MAIN HARNESS
(Covered with yellow outer insulation)

MAIN SWITCH

Test, page 23-308
Replacement, page 23-308

SET/RESUME/CANCEL SWITCH

Test, page 23-309
Replacement, page 23-309

CRUISE CONTROL UNIT

Input Test, page 23-306 ('93-'95) or 23-318 ('91 Model) or 23-330 ('92 Model)


CLUTCH SWITCH (M/T)
Test, page 23-310

CABLE REEL
Replacement, page 23-438 ('92-'95),
Removal, page 23-365 ('91 Model),
Installation, page 23-367 ('91 Model)

BRAKE SWITCH
Test, page 23-310

A/T GEAR POSITION SWITCH (A/T)
Test, page 23-311
Replacement, page 23-161

ACTUATOR ASSEMBLY
Test, page 23-311
Cable Adjustment, page 23-312

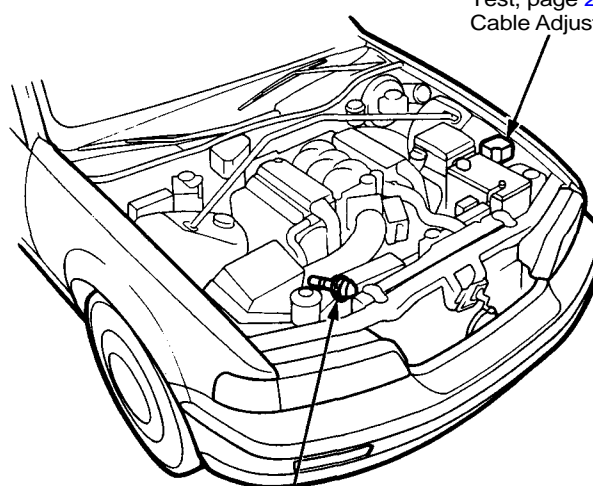

VEHICLE SPEED SENSOR (VSS)
Test, page 23-142 ('91 Model) or ('92-'95 Models)