




## SET/RESUME/CANCEL Switch Test

**CAUTION:** Disconnect both the negative and positive battery cables. Connect the short connector to the air-bag assembly (see page 23-407).


1. Disconnect the cable reel harness and main harness 7-P connector, and connect test harness C only to the cable reel harness side of the 7-P connector.

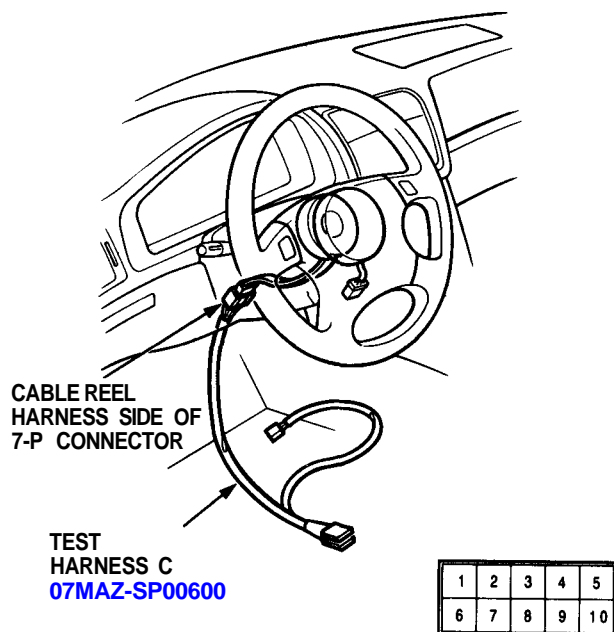

2. Check for continuity between the terminals in each switch position, according to the table.

Terminal Position	2		1	3
SET (ON)				
RESUME (ON)				
CANCEL (ON)				

3. Remove the switch cover from the SET/RESUME/CANCEL switch, then remove the SET/RESUME/CANCEL switch by removing the two screws.

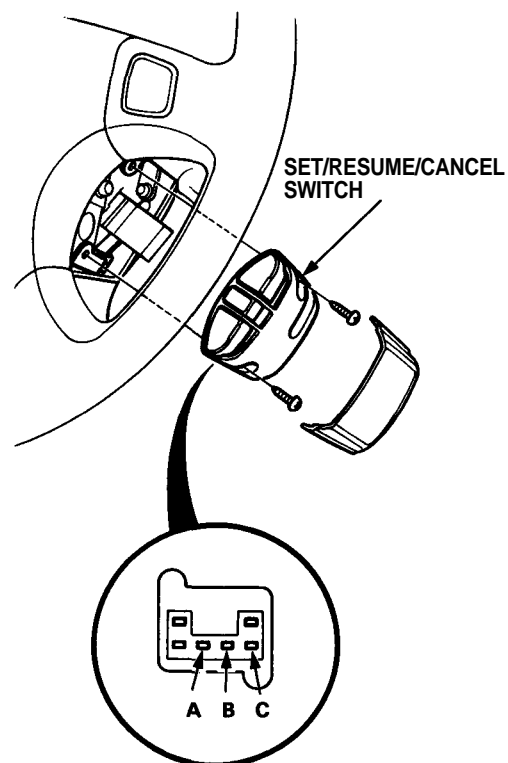

4. Check for continuity between the terminals in each switch position, according to the table.

Terminal Position	C		B	A
SET (ON)				
RESUME (ON)				
CANCEL (ON)				