


Max Cool Motor

Replacement

1. Remove the dashboard lower panel and disconnect the connector from it.
2. Disconnect the max cool motor connector and air mix control motor connect.
3. Unhook the clip of motor rod from the motor.
4. Remove its mounting screws, then, remove the motor.

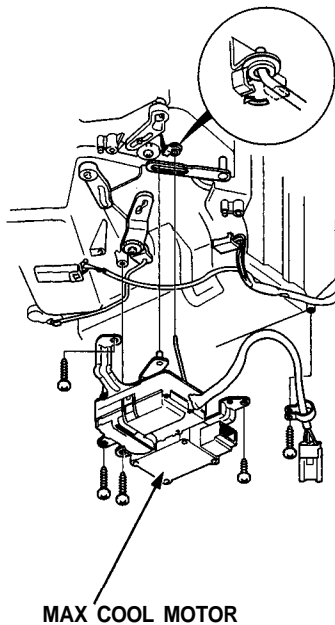

Test

1. Connect battery power to the No. 1 terminal of the max cool motor, and connect the No. 2 terminal to ground.
The max cool motor should run. If it doesn't connect the No. 3 terminal the motor should then run.

