



## Ruger MKI, MKIII, MKIII, and 22/45 Extractor Installation Instructions

V1.0

[www.tandemkross.com](http://www.tandemkross.com)

For more info or support contact [CustomerService@tandemkross.com](mailto:CustomerService@tandemkross.com)

### **Attention: Before you begin, be certain that the firearm is safe.**

*Always wear eye protection when working on firearm parts.*


#### *Tools you will need:*

- *A sharp awl, small flathead screwdriver, dental pick, or similar to assist with alignment of springs and parts.*
- *Optional: a small magnet.*

Step 1: Remove the bolt from the pistol. The extractor is found along the right hand side of the bolt.

Step 2: Remove the recoil spring, the firing pin stop and firing pin and the rebound spring and rebound spring support.

This allows the extractor plunger to go back far enough to easily remove the extractor. ***Be careful to keep track of the firing pin and the rebound spring and rebound spring support which are located under the firing pin.***

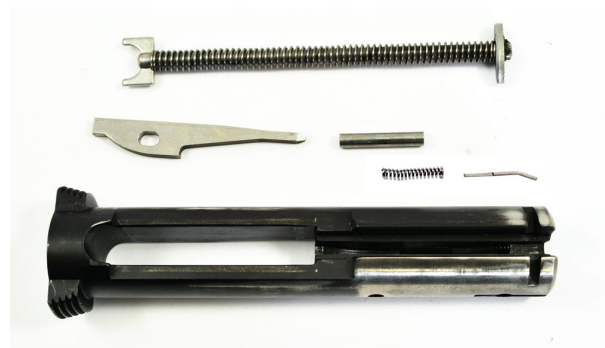

Step 3: Using a sharp awl, dental pick or similar tool press down on the top of the plunger toward the back of the bolt. This will allow enough room to remove the extractor. Using a small magnet here can assist with the removal of the old extractor.



Step 4: Install the new extractor by pressing the plunger toward the back of the bolt.



Step 5: Release the plunger with the new extractor in place and the pressure from the spring will self align the new extractor.

