

CONSEW Since 1898


MODELS 2701/2701H

FLATBED MACHINES WITH NEEDLE FEED, WHEEL FEED & DRIVEN ROLLER PRESSER

WITH
VERTICAL AXIS ROTARY HOOKS
INTERMITTENT WHEEL FEED
INTERMITTENT POSITIVELY DRIVEN
ROLLER PRESSER
SIMPLIFIED SEMI-AUTOMATIC LUBRICATION
ANTI-FRICTION BALL AND ROLLER BEARINGS
BUILT-IN BOBBIN WINDER

FLAT BED

Model 2701

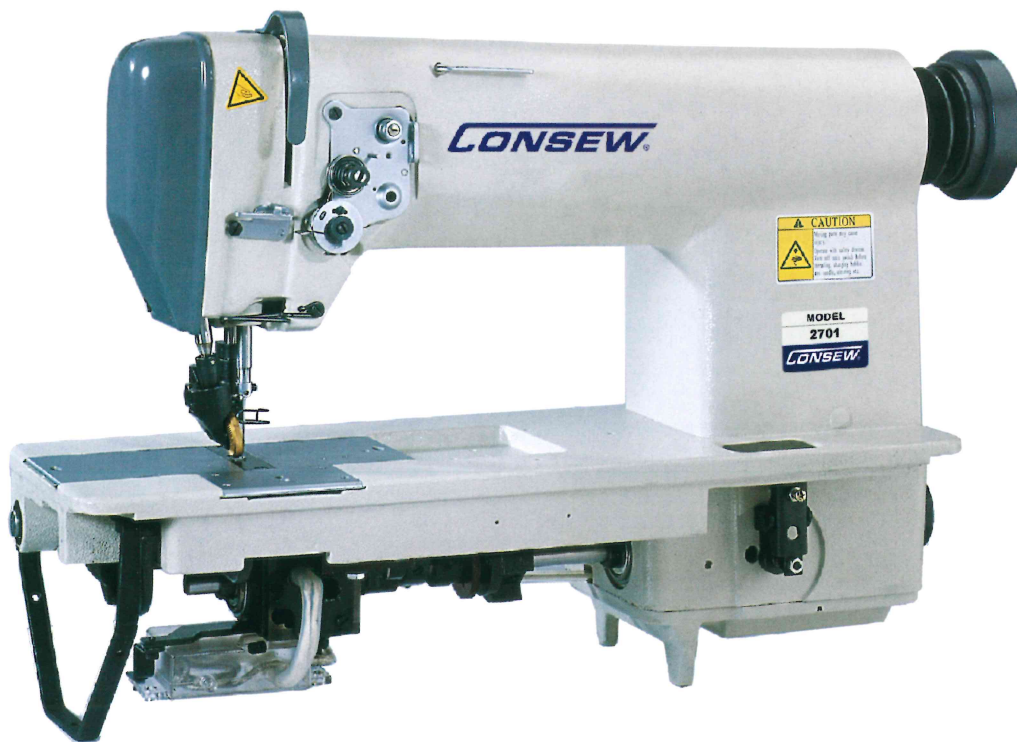

HIGH SPEED
SINGLE NEEDLE
LOCKSTITCH MACHINES
DROP FEED, NEEDLE FEED
POSITIVELY DRIVEN ROLLER PRESSER

Models 2701/2701H

APPLICATIONS

- Lower and driven presser wheel feeding action combined with needle feed provide powerful transport for slippery materials of any type as well as leather, vinyl and polyethylene plastics, oil cloth, just any material difficult to feed, coated and laminated fabrics. Great for sewing light materials without wrinkling.
- Great for sewing regular and ornamental seams on leather goods, bags, shoes, etc.

FEATURES

- Maintenance-free anti-friction ball and needle roller bearings and link take-up lever.
- Continuous lubrication from copious reservoir.
- Vertical axis rotating hooks.
- Easy bobbin case opener.
- Triple feeding mechanism assures even feeding of difficult-to-sew materials.
- Accurate and uniform stitches with infinitely variable stitch length adjustment

AVAILABLE MODELS

2701- Single needle, lower wheel feed, driven upper wheel feed, needle feed

2701H- Heavy Duty has longer maximum stitch length

SPECIFICATIONS

	Model 2701	Model 2701H
Speed, Max. (S.P.M.)*	2500	
Lift of Roller Presser	7/16" (10mm)	
Needle Bar Stroke	1 7/16" (36mm)	
Stitch Length, Max. (s.p.i.)	5 spi (5 mm)	3.6 spi (7 mm)
Needle	135 x 7, DP x 5	
Stitch Type	301	

(* Speed dependent on materials, thread and operation.)