

**CONSEW**® Since 1898

## MODEL 287RB-2

### WALKING FOOT


WITH

CENTRA-LUBE® SEMI-AUTOMATIC LUBRICATION SYSTEM

VERTICAL AXIS ROTARY HOOK

REVERSE FEED

SAFETY CLUTCH

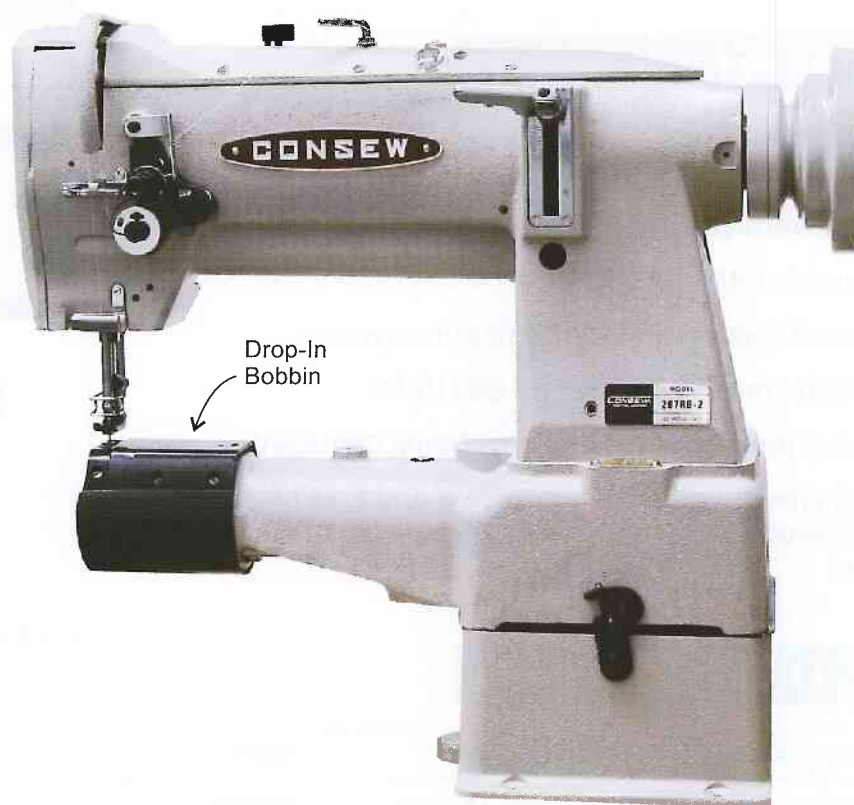

3 7/32"  
DIAMETER  
CYLINDER  
BED

CYLINDER ARM

HEAVY DUTY CYLINDER ARM  
SINGLE NEEDLE  
DROP FEED, NEEDLE FEED  
WALKING FOOT  
ALTERNATING PRESSER FEET  
LOCKSTITCH MACHINE

## Model 287RB-2

### APPLICATIONS

- For sewing light to heavy-weight fabrics, leather, vinyl, upholstery, synthetics, canvas and various coated and laminated materials
- Designed for stitching tubular and curved work.
- Suitable for sewing such products as caps, cushions, boots, shoes, auto, boat and furniture upholstery, tarpaulins, covers, sails, tents, awnings, umbrellas, tops, bags, luggage, handbags, travelware accessories, sports and camping equipment, wearing apparel, orthopedic appliances, slippers, etc.
- Tape Binding with synchronized binder, Model 287RBFS



### FEATURES

- Vertical axis rotary hook
- Compound feed, walking foot mechanism assures even feeding of several plies or of slippery materials
- Stitches per minute — 2300\*
- Centra-Lube® semi-automatic lubrication system
- Reverse feed – models 287RB-2 / 287RBFS
- Safety clutch prevents the hook from being damaged
- Simple adjustment permits the raising and lowering of the center foot which allows for sewing of different thicknesses of material



287RB Bobbin

### SPECIFICATIONS

Speed, Max. (S.P.M.)*	2300	Hook	13086
Clearance Under Foot: by hand	11/32" (8.5mm)	Needle	135 x 17
by pedal	35/64" (14mm)	Bed Size	3 7/32" dia. x 10 9/16" (65mm dia. x 268mm)
Needle Bar Stroke	1 5/16" (33.2mm)	Work Space	10 5/32" (258 mm)
Stitch Length, Max.	1/4" ( 6.2 mm)	Stitch Type	301
Bobbin	Metal	10656	
	Pre-wound	U	

\* Speed depends on materials, thread and operation.