


CONSEW 327RB-2

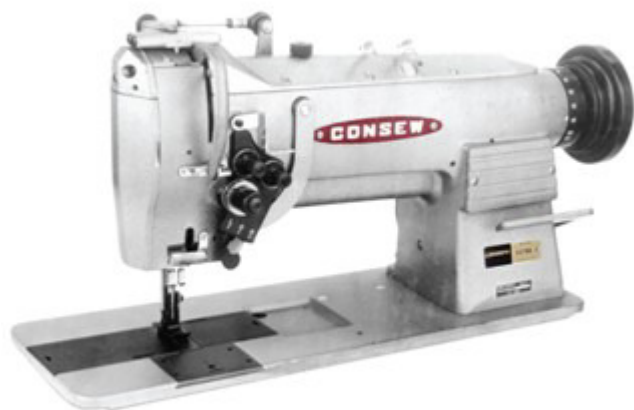

OVERVIEW

High Speed, Two Needle, Angular Sticking, Split Needle Bar, Drop Feed, Needle Feed, Lockstich Machine

With: Centra-Lube Semi-Automatic Lubrication System, Large Vertical Axis Hooks and Bobbins, Disengageable Right and Left Needle Bars, Reverse Feed, Safety Clutch

APPLICATIONS

- For medium to heavy duty materials such as cloth, leather, canvas, vinyls, synthetics and various coated and laminated materials
- Designed for sewing operations which require decorative or functional. angular stitching such as collars, lapels, pocket flaps, pockets and fly fronts
- Used for stitching such products as wearing apparel, table cloths, brassieres and leather accessories
- General parallel / two-needle stitching (top or run stitching)

FEATURES

- The compound feed mechanism assures perfect and uniform stitching and eliminates slippage
- Large hooks and bobbins
- Special bobbin case cap eliminates loose bottom stitches when angular stitching is employed
- Easy operation of disengageable right and left needle bars by use of finger-touch lever
- Centra-Lube® semi-automatic lubrication system
- Automatic hook lubrication
- Oil fed take-up
- Reverse stitching
- Large range of gauge sets available
- Safety clutch protects the hooks from being damaged

SPECIFICATIONS

Number of Needles	2 (Double)
Feeding Mechanism	Needle Feed
Workspace	Standard Workspace
Standard or Full Function	Standard Functions
Speed, Max (S.P.M.)	2200
Clearance Under Presser Foot	9/32" (7mm)
Stitch Length	4.5 s.p.i. (5.5mm)
Work Space	10" (258mm)
Needle	135 x 7
Bobbin	Pre-Wound U
Bed Size	7" x 20 3/8" (177mm x 518mm)
Stitch Type	301
Needle Bar Stroke	1 1/4" (32mm)
Hook	16407
Needle Distances	1/4" Standard (1/8-1 1/4" avail)

**CONTACT:
TEAMWORKSALES INC.
3363 E. 15TH STREET
LOS ANGELES CA. 90023
P: 818 919-9009**