



# SAFE-T-COVER<sup>®</sup>

BY HYDROGOWL

ENCLOSURES DESIGNED FOR THE WORLD'S WATER SYSTEMS<sup>™</sup>

## ASSEMBLY INSTRUCTION

### READ CAREFULLY




FIG. 1C

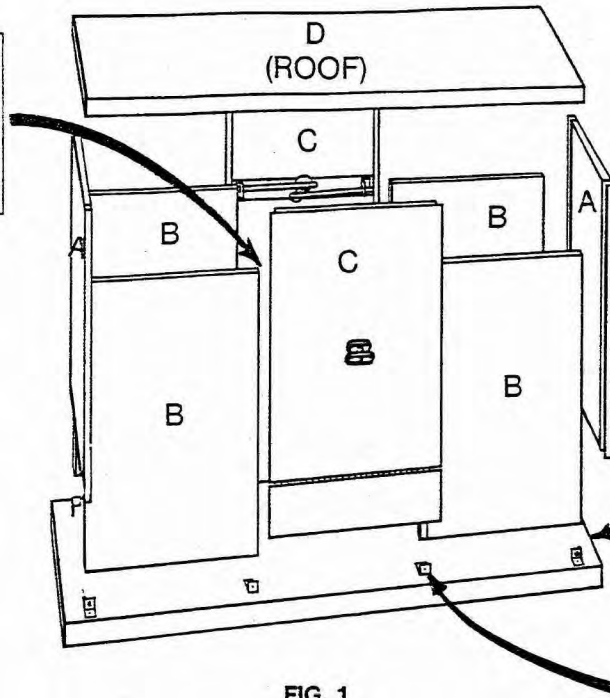


FIG. 1




FIG. 1A




FIG. 1B


Model No.	Inside Dimensions	Outside Dimensions	Recommended Concrete Pad Dimensions
300-Series	22"W x 72"L x 38"H	25 3/4"W x 75 1/8"L x 41 1/4"H	36"W x 86"L x 6" Thick
300T-Series	22"W x 72"L x 50"H	25 3/4"W x 75 1/8"L x 53 1/4"H	36"W x 86"L x 6" Thick
400-Series	26"W x 86"L x 44"H	29 3/4"W x 89 1/8"L x 47 1/4"H	40"W x 100"L x 6" Thick
400T-Series	26"W x 86"L x 54"H	29 3/4"W x 89 1/8"L x 57 1/4"H	40"W x 100"L x 6" Thick
600-Series	36"W x 100"L x 56"H	39 3/4"W x 103 1/8"L x 59 1/4"H	50"W x 114"L x 6" Thick
600T-Series	36"W x 100"L x 64"H	39 3/4"W x 103 1/8"L x 67 1/4"H	50"W x 114"L x 6" Thick
600TM -Series	36"W x 100"L x 70"H	39 3/4"W x 103 1/8"L x 73 1/4"H	50"W x 114"L x 6" Thick
600TS -Series	38"W x 120"L x 64"H	41 3/4"W x 123 1/8"L x 67 1/4"H	52"W x 134"L x 6" Thick

1. Center a "6" thick concrete base around installed BFP.

A. Place expansion material around riser pipes and place conduit for electrical power before placing concrete. **CONCRETE SHOULD BE FINISHED ABSOLUTELY LEVEL, FLAT AND SMOOTH.** Allow concrete to cure.

B. Mark concrete with outside dimensions of enclosure. (Center around BFP).

2. Using four (4) hexhead screws for each section, assemble both "A-B" sections thru holes provided and set on marked concrete base (FIG 2).
3. Set "D" (roof) panel on "A-B" sections and using four (4) hexhead screws fasten thru holes provided.
4. A. Using one (1) hexhead screw attach **Outside SS Corner Anchoring Brackets** to "A-B" sections. Fasten bracket to concrete using one anchor for each bracket (FIG 1A).  
 B. Square the "A-B" corners. Align the "B" panels so that they form a straight line. Using one (1) hexhead screw and one (1) hit pin for each bracket attach **Inside Aluminum Anchoring Brackets** to "B" panels and concrete (FIG 1B).  
 C. Insert **Inside Roof Clips** in "D" (roof) panel. Using one (1) hexhead screw in each clip attach clip to "B" (side) panel (FIG 1C).

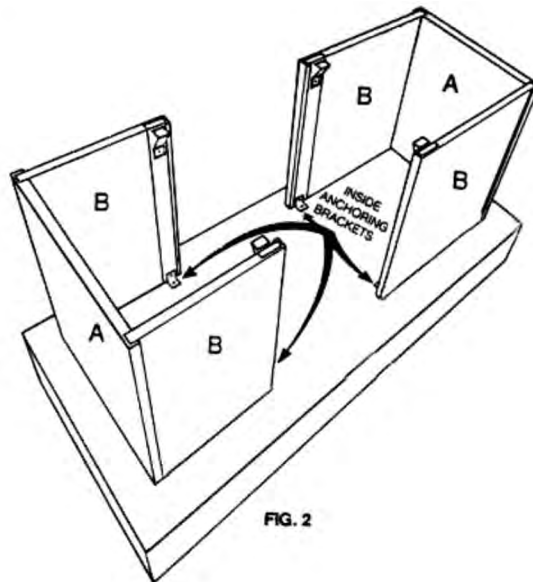

5. Set "C" panels and lock in place. (**Solid "C" panel to be ACCESS door**).
6. Provide ground-fault interrupter device in electrical circuit according to applicable codes. Install heater as per manufacturer's instructions and governing local and national codes.
7. For maximum protection it is suggested that the area between the bottom of the enclosure and the concrete base be caulked with the exception of the "C" panels. **DO NOT CAULK THE BOTTOM OF THE "C" DOOR PANELS.**

**SAFE-T-COVER**

1-800-245-6333

HCF300

# **REMOVE MASKING FILM IMMEDIATELY** **AFTER INSTALLATION**

*If these panels get wet when the film is still on,  
water will irreversibly stain the panels.*

*Summertime heat will bake the film on the panels.*

**Model No. 300 Series**  
**Model No. 300T Series**  
**Model No. 400 Series**  
**Model No. 400T Series**  
**Model No. 600 Series**  
**Model No. 600T Series**  
**Model No. 600TM Series**  
**Model No. 600TS Series**

## **Contents**

**2- "A" (end) Panels**  
**4- "B" (side) Panels**  
**1- "C" (drain door) Panel**  
**1- "C" (solid access) Panel**  
**1- "D" (roof) Panel**  
**4- Outside Corner SS Anchoring Brackets (2 ½" x 2 ½")**  
**4- Inside Aluminum Anchoring Brackets (3" x 3")**  
**4- Inside Roof Clips**  
**8- Anchors**  
**26- Screws**  
**1- Masonry Bit**  
**1- Magnetic Chuck**

## **TOOLS NEEDED**

**Hammer**  
**Drill**  
**3/4" Wrench**

**SAFE-T-COVER**

1-800-245-6333

HCF300