

MODEL 347R

WITH

- ZIG-ZAG
- CYLINDER BED
- FEED-OFF-THE-ARM
- HORIZONTAL AXIS TRANSVERSE **ROTARY HOOK**
- 3000 MAX. S.P.M.
- REVERSE FEED

SINGLE NEEDLE **DROP FEED** FEED-OFF-THE-ARM CYLINDER BED ZIG-ZAG **MACHINE**



APPLICATIONS

- · For sewing light to medium weight materials including leather, vinyl, canvas and laminated and coated materials
- Designed for stitching on cylindrical objects and to close many kinds of apparel or accessory articles
- · Can also be used for decorative types of stitching
- · Suitable for stitching such products as wet suits, tarpaulins, sails, shoes, boots and mops


SPECIFICATIONS		
Speed, Max. (S.P.M.)		3000
Clearance Under Foot		15/ ₆₄ " (6 mm)
Needle Bar Stroke		1-19/ ₆₄ " (33 mm)
Stitch Length, Max.		5 s.p.i. (5 mm)
Needle		135 x 5
Bobbin	Metal	B 54
	Pre-wound	F
Hook		B 49
Cylinder Bed Dia.		2-3/ ₁₆ " (55 mm)
Stitch Width, Max.		3/ ₈ " (8 mm)
Stitch Type		304

Walking Foot





Feed-off-the-arm **Zig-Zag** upper and lower feed machine

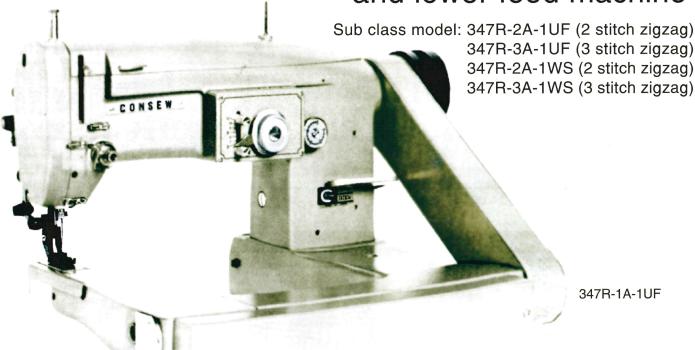

347R-1A-1UF

FEATURES

- Cylindrical arm suitable for any tubular pieces.
- Upper and lower feed mechanism to avoid puckering and material slippage.
- Good for any stretchable material, such as rubber coated cloth, vinyl, elastic, wetsuits, orthopedic braces.
- 2-stitch and 3-stitch types are good for reinforcing stitches on heavier materials.

SPECIFICATIONS

Single needle Sewing type

lockstitch zigzag

Sewing speed

2,800 s.p.m.

Stitch length

5 mm (max)

Zigzag width

10 mm (max)

Cylinder diameter 55 mm

Cylinder length

225 mm

Presser bar lift

5 mm

Lubrication

Semi-automatic



347R-1A-1WS Especially for wetsuits.

2-stitch and 3-stitch types are good for reinforcing stitches on heavier materials.

Specifications subject to change without notice.

©2007 Consew USA -307

