
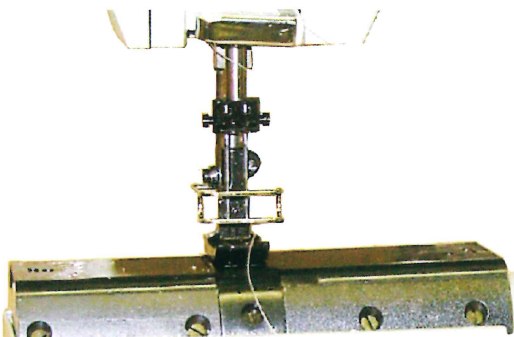


Since 1898
CONSEW®
MODEL 387RB-2

WITH
 CENTRA-LUBE®
 SEMI-AUTOMATIC LUBRICATION SYSTEM
 LARGE VERTICAL AXIS ROTARY HOOKS AND BOBBINS
 REVERSE FEED
 SAFETY CLUTCH

**LARGE
BOBBIN**

DOUBLE NEEDLE



CYLINDER ARM

**HEAVY DUTY
 CYLINDER ARM
 TWO NEEDLE
 DROP FEED, NEEDLE FEED
 WALKING FOOT
 ALTERNATING PRESSER FEET
 LOCKSTITCH MACHINE**

APPLICATIONS

- For sewing light to heavy-weight fabrics, leather, vinyl, upholstery, synthetics, canvas and various coated and laminated materials
- Designed for stitching tubular and curved work.
- Suitable for sewing such products as caps, cushions, boots, shoes, auto, boat and furniture upholstery, tarpaulins, covers, sails, tents, awnings, umbrellas, tops, bags, luggage, handbags, travelware accessories, sports and camping equipment, wearing apparel, orthopedic appliances, slippers, filters, etc.



FEATURES

- Two needle mechanism readily makes two parallel lines of stitches
- Large vertical axis rotary hooks and bobbins assure longer operation between bobbin changes
- Compound feed, walking foot mechanism assures even feeding of several plies or of slippery materials Centra-Lube® semi-automatic lubrication system
- Reverse feed
- Safety clutch prevents the hook from being damaged
- Simple adjustment permits the raising and lowering of the center foot which allows for sewing of different thicknesses of material
- Various needle gauges available

SPECIFICATIONS

Speed, Max. (S.P.M.)*		2500*	Hook		13719
Clearance Under Foot		11/32" (8.5mm)	Bed Size		3 7/32" dia. x 13" (82mmØ x 330mm)
Needle Bar Stroke		1 5/16" (33.2mm)	Work Space		10" (254 mm)
Stitch Length, Max.		@4 s.p.i. (6.2 mm)	Stitch Type		301
Bobbin	Metal	15041	Needle		135 x 17
	Pre-wound	S	Standard Needle Spacings: 1/8", 1/4", 3/8", 1/2"		

* Speed depends on materials, thread and operation.