

**CONSEW**® Since 1898


# MODELS 5457R / 5457R-3 / 5457R-43

WITH  
HORIZONTAL AXIS TRANSVERSE ROTARY HOOK  
AUTOMATIC LUBRICATION  
REVERSE FEED  
BUILT IN BOBBIN WINDER  
ROTARY TAKE-UP

*Model 5457R-43*



*Model 5457R*

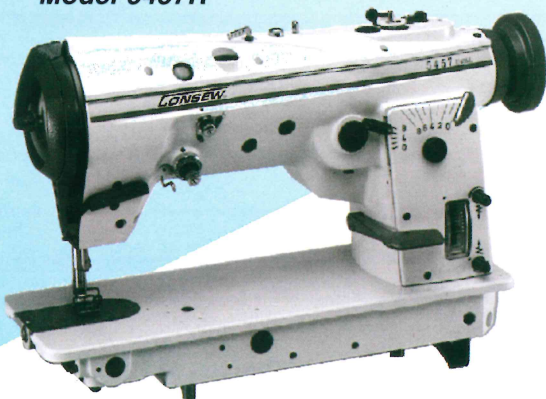

ULTRA HIGH SPEED  
SINGLE NEEDLE  
DROP FEED  
ROTARY TAKE-UP ZIG-ZAG  
LOCKSTITCH MACHINE

**ZIG ZAG**

## Model 5457R / 5457R-3 / 5457R-43

### APPLICATIONS

- For sewing light to medium-heavy weight fabrics
- For use with such products as foundation garments, brassieres, underwear, apparel and accessory groups
- Model 5457R (2 step/1 stitch) Standard Zig-Zag, Federal stitch number 304.
- Model 5457R-3 (4 step/3 stitch) Elastic seaming and attaching elastic straps to corsets, bras, and waist sections
- Model 5457R-43 (4 step/3 stitch cam is standard. All others are optional.) For scallop and blindstitch stitching as well as regular zig-zag stitching

### FEATURES

- Automatic lubrication
- Horizontal axis transverse rotary hook
- Zig-zag stitch at center position or either to left or right of center position
- Stitches per minute - 5000\* (Model 5457R-43 – 4000 S.P.M.\*)
- Reverse stitching
- Dial-type zig-zag width adjustment
- Rotary take-up lever
- Dial-type feed adjustment
- Needle position adjustment by lever
- Model 5457R-43 – interchangeable pattern stitch cams (call for design specifications)



### SPECIFICATIONS

Speed, Max. (S.P.M.)*	5000*	Bobbin	Metal	2130504-321
{Speed, Max. (S.P.M.)* Model 5457R-43 4000*}			Pre-wound	F
Clearance Under Foot	1/4" (6.35mm)	Hook		2130504-310
Needle Bar Stroke	1 3/16" (33mm)	Bed Size		7" x 18 7/8" (178 x 478 mm)
Stitch Length, Max.	Model 5457R 5 s.p.i. (5 mm)	Work Space		10" (255mm)
	Model 5457R-3 10 s.p.i. (2.5 mm)	Stitch Width, Max.		5/16 (8 mm)
Needle	1906-1	Stitch Type		304 (standard 1-stitch)

\* Speed depends on operation, materials and thread