

CONSEW Since 1898

MODELS 754R-3/756R-3 (MODELS 754R /756R)

WITH
LARGE OSCILLATING SHUTTLE HOOK
EXTRA LONG ARM – 16½" (420mm)
REVERSE FEED
BUILT-IN BOBBIN WINDER
CAM TAKE-UP LEVER
HEAVY BALANCE WHEEL
EXTRA HIGH FOOT LIFT – 13/16" (20mm)


754R-3 LOWER & NEEDLE FEED,
REVERSE FEED

756R-3 LOWER, NEEDLE & UPPER FEED
REVERSE FEED

Model 756R-3
COMPOUND FEED
NEEDLE FEED
ALTERNATING
PRESSER FEET
DROP FEED



CYLINDER ARM

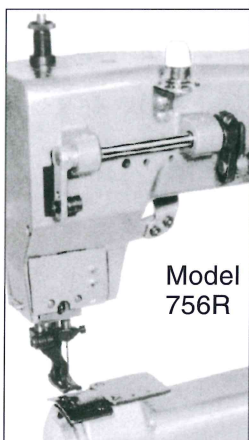

**Model
756R**

EXTRA HEAVY DUTY
SINGLE NEEDLE
LOCKSTITCH MACHINE
LONG CYLINDER ARM (16½")

Models 754R-3 / 756R-3 (Models 754R / 756R)

APPLICATIONS

- Suitable for sewing heavyweight materials such as canvas, vinyl, leather, synthetics and various coated, laminated and rubberized fabrics.
- Appropriate for use in upholstery, footwear, leather, canvas industries
- Designed for stitching such products as tents, sails, harnesses, tarpaulins, safety belts, parachutes, balloons, industrial bags, boots, book binding, auto, boat and furniture upholstery, sports and camping equipment, orthopedic appliances, suitcases, luggage, ski boots, knapsacks, footwear and outerwear made of extra heavy duty materials
- Recommended for sewing tubular and curved work
- Designed for extra thick thread

FEATURES

- Large oscillating shuttle hook
- Extra long arm - 16½" (420mm) for R-3 version (*15¾" -400mm for R version*)
- Reverse feed
- Built-in bobbin winder
- Cam take-up lever
- Extra high presser lift for sewing extra heavy materials
- Heavy balance wheel
- A cloth plate for flat work available as optional equipment for all models
- Triple Transport: bottom, top and needle feed (walking foot)

SPECIFICATIONS

Models	Sewing Speed s.p.m.*	Presser Lift		Needle Bar Stroke		Stitch Length		Needle	Cylinder Arm Diameter min.		Working Space	
		mm	inches	mm	inches	mm	s.p.i.		mm	inches	mm	inches
754R-3	800	20mm	13/16"	56	2 13/64"	10	2 1/2	7 x 3	81	3 3/16"	420	16 1/2"
756R-3	800	20mm	13/16"	56	2 13/64"	10	2 1/2	7 x 3	81	3 3/16"	420	16 1/2"
754R	1200	25.4"	1"	56	2 13/64"	10	2 1/2	7 x 3	84	3 9/32"	400	15 3/4"
756R	1200	25.4"	1"	56	2 13/64"	10	2 1/2	7 x 3	84	3 9/32"	400	15 3/4"

* Speed depends on operation, materials and thread